

## Inlet


コレクション	<b>Unite</b>	
スタイルナンバー	<b>0926V</b>	
建設	グラスファイバーの重い商業高級ビニルタイル	
クラス	<b>Class III, Type B</b>	
仕上げ	<b>ExoGuard®</b>	
	米国	メートル法
公称寸法	<b>9 in w x 48 in l</b>	<b>23 cm w x 122 cm l</b>
実際の寸法	<b>9.00 in w x 48.00 in l</b>	<b>22.86 cm w x 121.92 cm l</b>
摩耗層の厚さ	<b>20 mil (0.02 in)</b>	<b>0.51 mm</b>
製品全体の厚さ	<b>0.197 in</b>	<b>5 mm</b>
エッジプロファイル	<b>スクエア エッジ</b>	
Installation Type	<b>Loose Lay</b>	
インストール	<b>Direct Glue Or Perimeter Glue</b>	
推奨接着剤	<b>S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon or 4151 Multi-Use Premium 4 Gallon</b>	

### 包装

ボックスあたりの個数	<b>8 pcs</b>	
ボックスあたりの面積	<b>24 sq ft</b>	<b>2.23 sq m</b>
ボックスあたりの重量	<b>41.75 lbs</b>	<b>18.94 kg</b>



### 推奨インストール方法

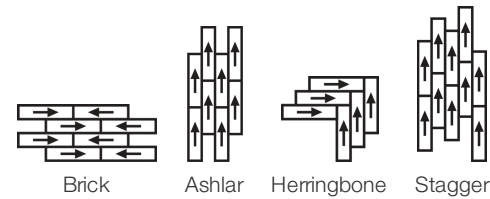

### パフォーマンス + テスト

残留圧痕 (astm F1914)	<b>Passes</b>
耐熱性 (astm F1514)	<b>Passes</b>
耐光性 (astm F1515)	<b>Passes</b>
耐薬品性 (astm F925)	<b>Passes</b>
摩擦係数(astm D2407、滑り抵抗)	<b>≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces</b>

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

### 保証

[15年の商用限定保証](#)  
[Commercial 15 Year Underbed Bond Warranty](#)

## Diversity, Equity &amp; Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend\*\*\*\*\* is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## 属性+認定

## Health &amp; Wellbeing

Material Ingredient Transparency

Health Product Declaration (HPD) | 1000 ppm Disclosure

## Climate Impact

Environmental Product Declaration (EPD)

ISO 14025、EN 15804 および ISO 21930:2017 に基づく第三者認証取得

Total Recycled Content

0% (Pre-Consumer 0% | Post-Consumer 0%)

## Global Product Assessment

FloorScore® | 認証取得

Country of Origin | Imported

## グリーンリード貢献クレジット

MRクレジット：製品の開示と最適化の構築  
材料成分-オプション1：材料成分レポートMRクレジット：製品の開示と最適化の構築  
環境製品宣言-オプション1：環境製品宣言 (EPD)EQクレジット：低排出材料  
オプション1：製品カテゴリの計算[Installation Guidelines](#)[Maintenance Guidelines](#)

Health Product Declaration (HPD) | 100 Ppm Disclosure

3rd Party Certified in Accordance with ISO 14025, EN 15804, &amp; ISO 21930:2017

FloorScore Certified

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.


Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways


Nestle 26120  
V3 - Moderate VariationSpindle 26140  
LRV 38.3  
V2 - Slight VariationRefuge 26155  
LRV 20.9  
V3 - Moderate VariationBeech 26502  
LRV 36.8  
V3 - Moderate VariationShade 26506  
LRV 29  
V3 - Moderate VariationThistle 26535  
LRV 25.5  
V3 - Moderate Variation




Raw 26549  
LRV 8.2  
V2 - Slight Variation



Coarse 26595  
LRV 14.5  
V3 - Moderate Variation



Thatch 26720  
LRV 17.5  
V3 - Moderate Variation



Brew 26740  
LRV 14.8  
V3 - Moderate Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

