

Cove


Collection	Unite	
Numéro De Style	0927V	
Construction	Carreau De Vinyle De Luxe Commercial Lourd Avec Fibre De Verre	
classe	Class III, Type B	
Finition	ExoGuard®	
	Impérial	Métrique
Dimensions Nominales	9 in w x 48 in l	23 cm w x 122 cm l
Dimensions Réelles	9.00 in w x 48.00 in l	22.86 cm w x 121.92 cm l
Épaisseur De La Couche d'Usure	20 mil (0.02 in)	0.51 mm
Épaisseur Générale Du Produit	0.197 in	5 mm
Profil Du Bord	Bord Carré	
Installation Type	Loose Lay	
Installation	Direct Glue Or Perimeter Glue	
Adhésif Recommandé	S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or 4151 Multi-Use Premium 4 Gallon	



Emballage

Pièces Par Carton	8 pcs	
Surface Par Carton	24 sq ft	2.23 sq m
Poids Par Carton	41.75 lbs	18.94 kg

Méthodes d'Installation Conseillées

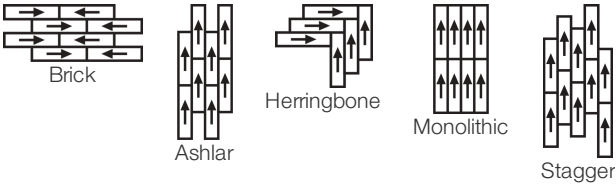

performance + Tests et essai

poinçonnement rémanent (ASTM F1914)
résistance à la chaleur (ASTM F1514)
résistance à la lumière (ASTM F1515)
résistance chimique (ASTM F925)
Essai au panneau radiant (Astm E648)
coefficient de frottement (ASTM D2407, résistance au glissement)

Passes
Passes
Passes
Passes
Passes, Class I
≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garanties

[Commercial 15 Year Underbed Bond Warranty](#)

[Limitée Commerciale De 15 Ans](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Attributs + Certifications

Health & Wellbeing

Material Ingredient Transparency

Indoor Air Quality

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)

[FloorScore® | Agréé](#)

Climate Impact

Environmental Product Declaration (EPD)

Embodied Carbon (Cradle to Gate)

Total Recycled Content

[Certifié Par Une Tierce Partie Conformément Aux Normes ISO 14025, EN 15804 Et ISO 21930:2017](#)

11.59 Kg CO₂/M²

0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

Country of Origin | Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition

X08 Réduction des matières dangereuses Partie 1 : Optimisation des limites des matières dangereuses – 1 pt

X10 Réduction des composés volatils Partie 1 (A) : Gérer l'optimisation des composés organiques volatils (COV) - 1 pt

Partie 2 : Gérer l'optimisation des composés organiques semi-volatils (COSV) - 1 pt

X11 Contrôle des émissions à long terme Partie 2 : Optimisation des revêtements de sol – 1 pt

X14 Transparence des matériaux Partie 1 : Promouvoir l'optimisation de la divulgation des ingrédients - max 2 pts

Absence of Asbestos

Absence of Heavy Metals

Absence of Halogenated Flame Retardants

Ortho-Phthalates

FloorScore Certificate

Health Product Declaration (HPD) | 1000 Ppm Disclosure

Contribution Au Certificat Vert Leed

« Crédit MR : Divulgation et optimisation des produits de construction

« Crédit MR : Divulgation et optimisation des produits de construction

Crédit EQ : matériaux faibles émissions

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Health Product Declaration (HPD) | 1000 Ppm Disclosure

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

FloorScore Certified

Please visit www.shawcontract.com for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways



Plaster 27111
LRV 53.2 | L* 77.99
V2 - Slight Variation



Lure 27201
LRV 49.4 | L* 75.67
V2 - Slight Variation



Graze 27326
LRV 31.5 | L* 62.9
V2 - Slight Variation



Jade 27405
LRV 20.8 | L* 52.74
V2 - Slight Variation



Wash 27436
LRV 23.7 | L* 55.77
V2 - Slight Variation



Sapphire 27486
LRV 17.2 | L* 48.51
V2 - Slight Variation



Silt 27504
LRV 31.9 | L* 63.25
V2 - Slight Variation



Caster 27518
LRV 23.2 | L* 55.33
V2 - Slight Variation



Gesso 27520
LRV 35.6 | L* 66.21
V2 - Slight Variation



Pour 27530
LRV 21.9 | L* 53.97
V2 - Slight Variation



Cornerstone 27585
LRV 13.5 | L* 43.45
V2 - Slight Variation



Stoke 27855
LRV 19.7 | L* 51.54
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1



Uniform Appearance

V2



Slight Variation

V3



Moderate Variation

V4



Substantial Variation

