

Cove


コレクション	Unite	
スタイルナンバー	0927V	
建設	グラスファイバーの重い商業高級ビニールタイル	
クラス	Class III, Type B	
仕上げ	ExoGuard®	
	米国	メートル法
公称寸法	9 in w x 48 in l	23 cm w x 122 cm l
実際の寸法	9.00 in w x 48.00 in l	22.86 cm w x 121.92 cm l
摩耗層の厚さ	20 mil (0.02 in)	0.51 mm
製品全体の厚さ	0.197 in	5 mm
エッジプロファイル	スクエア エッジ	
Installation Type	Loose Lay	
インストール	Direct Glue Or Perimeter Glue	
推奨接着剤	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

包装

ボックスあたりの個数	8 pcs	
ボックスあたりの面積	24 sq ft	2.23 sq m
ボックスあたりの重量	41.75 lbs	18.94 kg



推奨インストール方法

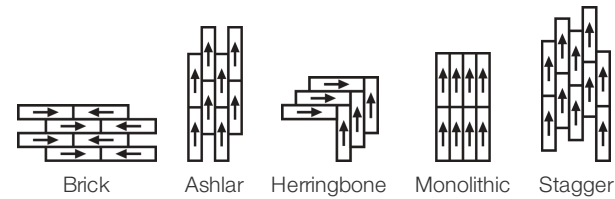

パフォーマンス + テスト

残留圧痕 (astm F1914)	Passes
耐熱性 (astm F1514)	Passes
耐光性 (astm F1515)	Passes
耐薬品性 (astm F925)	Passes
放射パネル (astm E648)	Passes, Class I
摩擦係数(astm D2407、滑り抵抗)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

保証

15年の商用限定保証
Commercial 15 Year Underbed Bond Warranty

Diversity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend***** is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

属性+認定

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD) 1000 ppm Disclosure
Indoor Air Quality	FloorScore® 認証取得
Climate Impact	
Environmental Product Declaration (EPD)	ISO 14025、EN 15804 および ISO 21930:2017 に基づく第三者認証取得
Embodied Carbon (Cradle to Gate)	7.31 Kg Co ₂ /M ²
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
Global Product Assessment	Country of Origin Imported

グリーンリード貢献クレジット

MRクレジット：製品の開示と最適化の構築 材料成分-オプション1：材料成分レポート	Health Product Declaration (HPD) 100 Ppm Disclosure
MRクレジット：製品の開示と最適化の構築 環境製品宣言-オプション1：環境製品宣言（EPD）	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
EQクレジット：低排出材料 オプション1：製品カテゴリの計算	FloorScore Certified
Installation Guidelines	Please visit www.shawcontract.com for the most current warranty information.
Maintenance Guidelines	Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit shawcontract.com/testing for more information.

Available Colorways

					
Plaster 27111 LRV 53.2 L* 77.99 V2 - Slight Variation	Lure 27201 LRV 49.4 L* 75.67 V2 - Slight Variation	Graze 27326 LRV 31.5 L* 62.9 V2 - Slight Variation	Jade 27405 LRV 20.8 L* 52.74 V2 - Slight Variation	Wash 27436 LRV 23.7 L* 55.77 V2 - Slight Variation	Sapphire 27486 LRV 17.2 L* 48.51 V2 - Slight Variation
					
Silt 27504 LRV 31.9 L* 63.25 V2 - Slight Variation	Caster 27518 LRV 23.2 L* 55.33 V2 - Slight Variation	Gesso 27520 LRV 35.6 L* 66.21 V2 - Slight Variation	Pour 27530 LRV 21.9 L* 53.97 V2 - Slight Variation	Cornerstone 27585 LRV 13.5 L* 43.45 V2 - Slight Variation	Stoke 27855 LRV 19.7 L* 51.54 V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

