

Cove

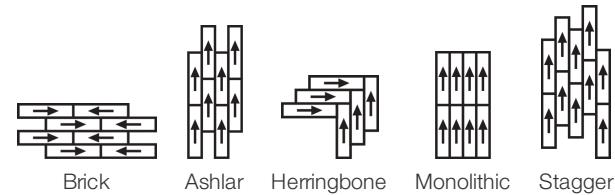
Coleção	Unite	
Número Do Produto	0927V	
Construção	Vinílico Lvt De Uso Comercial, Tráfego Pesado, Com Fibra De Vidro	
classe	Class III, Type B	
Acabamento	ExoGuard®	
	U.s.	Metric
Dimensões Nominais	9 in w x 48 in l	23 cm w x 122 cm l
Dimensões Reais	9.00 in w x 48.00 in l	22.86 cm w x 121.92 cm l
Espessura Da Camada De Uso	20 mil (0.02 in)	0.51 mm
Espessura Total Do Produto	0.197 in	5 mm
Perfil De Borda	Borda Quadrada	
Installation Type	Loose Lay	
Instalação	Direct Glue Or Perimeter Glue	
Adesivo Recomendado	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

Empacotamento

Peças Por Caixa	8 pcs	
Área Por Caixa	24 sq ft	2.23 sq m
Peso Por Caixa	41.75 lbs	18.94 kg



Método De Instalação Recomendado



Produtos Coordenados

LVT: Inlet, Cove

desempenho + teste

recuo residual (ASTM F1914)	Passes
resistência ao calor (ASTM F1514)	Passes
resistência à luz (ASTM F1515)	Passes
resistência a produtos químicos (ASTM F925)	Passes
painel radiante (ASTM E648)	Passes, Class I
coeficiente de atrito (ASTM D2407, resistência ao deslizamento)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Garantias

[Commercial 15 Year Underbed Bond Warranty](#)  
[15 Anos Comercial Limitada](#)

## Diversity &amp; Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## Atributos + Certificações

## Health &amp; Wellbeing

Material Ingredient Transparency  
Indoor Air Quality

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)  
[FloorScore® | Certificado](#)

## Climate Impact

Environmental Product Declaration (EPD)  
  
Embodied Carbon (Cradle to Gate)  
Total Recycled Content

[3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017](#)  
11.59 Kg CO<sub>2</sub>/M<sup>2</sup>  
0% (Pre-Consumer 0% | Post-Consumer 0%)

## Global Product Assessment

Country of Origin | Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition  
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt  
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt  
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt  
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts

**Absence of Asbestos**  
**Absence of Heavy Metals**  
**Absence of Halogenated Flame Retardants**  
  
**Ortho-Phthalates**  
**FloorScore Certificate**  
**Health Product Declaration (HPD) | 1000 Ppm Disclosure**

## Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção  
Ingredientes materiais - Opção 1: Relatório de ingredientes materiais  
MR Credit: Divulgação e otimização de produtos de construção  
Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)  
Crédito de EQ: Materiais de baixa emissão  
Opção 1: cálculos de categoria de produto

**Health Product Declaration (HPD) | 1000 Ppm Disclosure**  
  
**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**  
**FloorScore® Certified**

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply  
and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of  
this design in the creation of another product design is also strictly prohibited.





Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways

					
Plaster 27111 LRV 53.2   L* 77.99 V2 - Slight Variation	Lure 27201 LRV 49.4   L* 75.67 V2 - Slight Variation	Graze 27326 LRV 31.5   L* 62.9 V2 - Slight Variation	Jade 27405 LRV 20.8   L* 52.74 V2 - Slight Variation	Wash 27436 LRV 23.7   L* 55.77 V2 - Slight Variation	Sapphire 27486 LRV 17.2   L* 48.51 V2 - Slight Variation
					
Silt 27504 LRV 31.9   L* 63.25 V2 - Slight Variation	Caster 27518 LRV 23.2   L* 55.33 V2 - Slight Variation	Gesso 27520 LRV 35.6   L* 66.21 V2 - Slight Variation	Pour 27530 LRV 21.9   L* 53.97 V2 - Slight Variation	Cornerstone 27585 LRV 13.5   L* 43.45 V2 - Slight Variation	Stoke 27855 LRV 19.7   L* 51.54 V2 - Slight Variation

### Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1 	V2 	V3 	V4 
Uniform Appearance	Slight Variation	Moderate Variation	Substantial Variation

