

Cove


Colección	Unite	
Número De Estilo	0927V	
Construcción	Módulo De Lvt Comercial De Tráfico Severo Con Fibra De Vidrio	
clase	Class III, Type B	
Terminación	ExoGuard®	
	U.s.	Metric
Dimensiones Nominales	9 in w x 48 in l	23 cm w x 122 cm l
Dimensiones Reales	9.00 in w x 48.00 in l	22.86 cm w x 121.92 cm l
Desgaste De La Capa De Uso	20 mil (0.02 in)	0.51 mm
Espesor Total Del Producto	0.197 in	5 mm
Perfil De Borde	Borde Cuadrado	
Installation Type	Loose Lay	
Instalación	Direct Glue Or Perimeter Glue	
Adhesivo Recomendado	S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon or 4151 Multi-Use Premium 4 Gallon	

Embalaje

Piezas Por Caja	8 pcs	
Área Por Caja	24 sq ft	2.23 sq m
Peso Por Caja	41.75 lbs	18.94 kg



Método De Instalación Recomendado

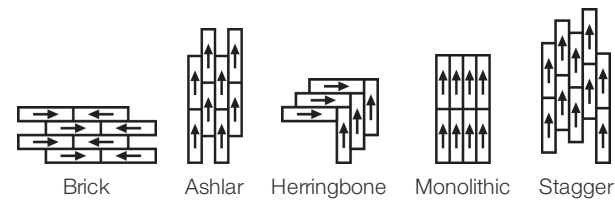

Productos Que Combinan

LVT: Inlet, Cove

Desempeño + Pruebas

Margen Adicional Residual (Astm F1914)	Passes
Resistencia Al Calor (Astm F1514)	Passes
Resistencia A La Luz (Astm F1515)	Passes
Resistencia A Productos Químicos (Astm F925)	Passes
Coeficiente De Fricción (Astm D2407, Resistencia Al Deslizamiento)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantías

[15 Años Limitado A Uso Comercial](#)  
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity, Equity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend\*\*\*\*\* is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

Atributos + Certificaciones

Health & Wellbeing

Material Ingredient Transparency

Health Product Declaration (HPD) | 1000 ppm Disclosure

Climate Impact

Environmental Product Declaration (EPD)

Certificado Tercerizado De Acuerdo Con La Norma ISO 14025, EN 15804, & ISO 21930:2017

Embodied Carbon (Cradle to Gate)

7.31 Kg Co<sub>2</sub>/M<sup>2</sup>

Total Recycled Content

0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

FloorScore® | Certificado  
Country of Origin | Imported

Contribución Para Créditos Leed

Crédito MR: Divulgación y optimización de productos de construcción  
Ingredientes de materiales - Opción 1: Informe de ingredientes de los materiales

Health Product Declaration (HPD) | 100 Ppm Disclosure

Crédito MR: Divulgación y optimización de productos de construcción  
Declaraciones ambientales de productos - Opción 1: Declaración ambiental de productos (EPD)

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

Crédito EQ: Materiales de baja emisión  
Opción 1: Cálculos de categoría de producto

FloorScore Certified

[Installation Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

Maintenance Guidelines

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.  
\*\*\*\*\*Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways

					
Plaster 27111 LRV 53.2 V2 - Slight Variation	Lure 27201 LRV 49.4 V2 - Slight Variation	Graze 27326 LRV 31.5 V2 - Slight Variation	Jade 27405 LRV 20.8 V2 - Slight Variation	Wash 27436 LRV 23.7 V2 - Slight Variation	Sapphire 27486 LRV 17.2 V2 - Slight Variation
					
Silt 27504 LRV 31.9 V2 - Slight Variation	Caster 27518 LRV 23.2 V2 - Slight Variation	Gesso 27520 LRV 35.6 V2 - Slight Variation	Pour 27530 LRV 21.9 V2 - Slight Variation	Cornerstone 27585 LRV 13.5 V2 - Slight Variation	Stoke 27855 LRV 19.7 V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

