


Concrete

Collection	Concrete + Composed	
Style Number	094UV	
Construction	Multilayer SPC With Attached Cork Underlayment	
class	Class III, Type B	
Attached Underlayment	Cork	
Finish	ExoGuard®	
	U.s.	Metric
Nominal Dimensions	19 in w x 24 in l	47 cm w x 61 cm l
Actual Dimensions	18.50 in w x 24.02 in l	46.99 cm w x 61.01 cm l
Wear Layer Thickness	20 mil (0.02 in)	0.51 mm
Overall Product Thickness	0.217 in	5.5 mm
Edge Profile	Micro-Bevel	
Installation Type	Click	
Installation	Floating Or Direct Glue	
Recommended Adhesive	, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, , 4151 Multi-Use Premium 4 Gallon or SHAW 4100 4 GAL	

Packaging

Pieces Per Box	10 pcs	
Area Per Box	30.86 sq ft	2.87 sq m
Weight Per Box	52.91 lbs	24 kg

Recommended Installation Method

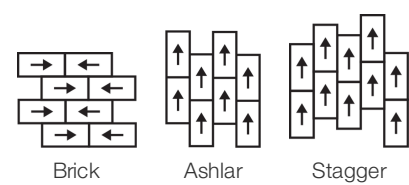

Coordinating Products

COREtec: Composed

Performance + Testing

Residual Indentation (Astm F1914)	Passes
Resistance To Heat (Astm F1514)	Passes
Resistance To Light (Astm F1515)	Passes
Radiant Panel (Astm E648)	Passes, Class I
Coefficient Of Friction (Astm D2407, Slip Resistance)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

15 Year Commercial Limited

Attributes + Certifications

Health & Wellbeing

Material Ingredient Transparency	Health Product Declaration (HPD)   1000 ppm Disclosure
Indoor Air Quality	FloorScore®   Certified

Climate Impact

Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
Total Recycled Content	0% (Pre-Consumer 0%   Post-Consumer 0%)

Global Product Assessment

CE Marking (EN 14041)   3rd Party Certified
Country of Origin   China

Green Leed Contribution Credit

MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)	<b>3rd Party Certified in Accordance with ISO 14025, EN 15804, &amp; ISO 21930:2017</b>
EQ Credit: Low Emitting Materials Option 1: Product Category Calculations	<b>FloorScore Certified</b>

Installation Guidelines

Maintenance Guidelines	Please visit <a href="http://www.shawcontract.com">www.shawcontract.com</a> for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.
------------------------	--

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

\*\*\*\*\*Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways

			
Misty Quartz 03501 LRV 51.2   L* 76.8	Tempered Concre 03502 LRV 28.1   L* 59.95	Rugged Platinum 03503 LRV 23.2   L* 55.33	Forged Concrete 03507 LRV 22.1   L* 54.13