


Concrete

Colección	Concrete + Composed	
Número De Estilo	094UV	
Construcción	SPC Multicapa Con Base De Corcho Adjunta	
clase	Class III, Type B	
Manta Inferior Adicional	Corcho	
Terminación	ExoGuard®	
	U.s.	Metric
Dimensiones Nominales	19 in w x 24 in l	47 cm w x 61 cm l
Dimensiones Reales	18.50 in w x 24.02 in l	46.99 cm w x 61.01 cm l
Desgaste De La Capa De Uso	20 mil (0.02 in)	0.51 mm
Espesor Total Del Producto	0.217 in	5.5 mm
Perfil De Borde	Micro-Biselado	
Installation Type	Click	
Instalación	Floating Or Direct Glue	
Adhesivo Recomendado	, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, , 4151 Multi-Use Premium 4 Gallon or SHAW 4100 4 GAL	

Embalaje

Piezas Por Caja	10 pcs	
Área Por Caja	30.86 sq ft	2.87 sq m
Peso Por Caja	52.91 lbs	24 kg

Método De Instalación Recomendado

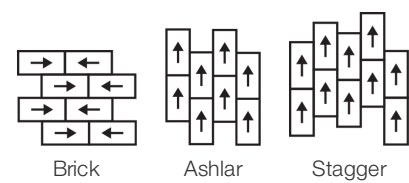

Productos Que Combinan

COREtec: Composed

desempeño + pruebas

margen adicional residual (ASTM F1914)	Passes
resistencia al calor (ASTM F1514)	Passes
resistencia a la luz (ASTM F1515)	Passes
panel radiante (ASTM E648)	Passes, Class I
coeficiente de fricción (ASTM D2407, resistencia al deslizamiento)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantías

15 Años Limitado A Uso Comercial

Atributos + Certificaciones

Health & Wellbeing

Material Ingredient Transparency
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure
FloorScore® | Certificado

Climate Impact

Environmental Product Declaration (EPD)

Embodied Carbon (Cradle to Gate)
Total Recycled Content

Certificado Tercerizado De Acuerdo Con La Norma ISO 14025, EN 15804, & ISO 21930:2017
11.8 Kg Co₂/M²
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

CE Marking (EN 14041) | Certificado Tercerizado
Country of Origin | China

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

Absence of Asbestos
Absence of Heavy Metals
Absence of Halogenated Flame Retardants

Ortho-Phthalates
Greenguard Gold Certificate

Contribución Para Créditos Leed

Crédito MR: Divulgación y optimización de productos de construcción
Declaraciones ambientales de productos - Opción 1: Declaración ambiental de productos (EPD)

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

Crédito EQ: Materiales de baja emisión
Opción 1: Cálculos de categoría de producto

FloorScore® Certified

Installation Guidelines

Maintenance Guidelines

Please visit www.shawcontract.com for the most current warranty information.
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways



Misty Quartz 03501
LRV 51.2 | L* 76.8



Tempered Concre 03502
LRV 28.1 | L* 59.95



Rugged Platinum 03503
LRV 23.2 | L* 55.33



Forged Concrete 03507
LRV 22.1 | L* 54.13

