


Concrete

Collection	Concrete + Composed	
Numéro De Style	094UV	
Construction	SPC Multicouche Avec Sous-Couche EN Liège Attachée	
classe	Class III, Type B	
Endos Intégrée	Liège	
Finition	ExoGuard®	
Dimensions Nominales	Impérial	Métrique
	19 in w x 24 in l	47 cm w x 61 cm l
	18.50 in w x 24.02 in l	46.99 cm w x 61.01 cm l
	20 mil (0.02 in)	0.51 mm
	0.217 in	5.5 mm
	Micro-Biseau	
	Click	
Dimensions Réelles	Floating Or Direct Glue	
Épaisseur De La Couche d'Usure	, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1	
Épaisseur Générale Du Produit	Gallon Pail, , 4151 Multi-Use Premium 4 Gallon or SHAW 4100 4 GAL	
Profil Du Bord		
Installation Type		
Installation		
Adhésif Recommandé		

Emballage

Pièces Par Carton	10 pcs	
Surface Par Carton	30.86 sq ft	2.87 sq m
Poids Par Carton	52.91 lbs	24 kg

Méthodes d'Installation Conseillées

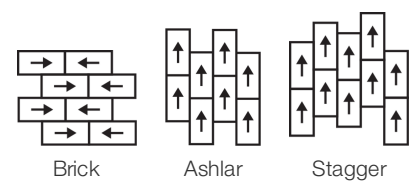

Coordination Des Produits

COREtec: Composed

Performance + Tests Et Essai

Poinçonnement Rémanent (Astm F1914)	Passes
Résistance À La Chaleur (Astm F1514)	Passes
Résistance À La Lumière (Astm F1515)	Passes
Essai Au Panneau Radiant (Astm E648)	Passes, Class I
Coefficient De Frottement (Astm D2407, Résistance Au Glissement)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garanties

[Limitée Commerciale De 15 Ans](#)

Attributs + Certifications

Health & Wellbeing

Material Ingredient Transparency	Health Product Declaration (HPD) 1000 ppm Disclosure
Indoor Air Quality	FloorScore® Agréé

Climate Impact

Environmental Product Declaration (EPD)	Certifié Par Une Tierce Partie Conformément Aux Normes ISO 14025, EN 15804 Et ISO 21930:2017
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)

Global Product Assessment

CE Marking (EN 14041) Certifié Par Un Tiers
Country of Origin Imported

Contribution Au Certificat Vert Leed

« Crédit MR : Divulgation et optimisation des produits de construction

Crédit EQ : matériaux faibles émissions

[Installation Guidelines](#)
[Maintenance Guidelines](#)

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
FloorScore Certified

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit shawcontract.com/testing for more information.

Available Colorways

			
Misty Quartz 03501 LRV 51.2 L* 76.8	Tempered Concre 03502 LRV 28.1 L* 59.95	Rugged Platinum 03503 LRV 23.2 L* 55.33	Forged Concrete 03507 LRV 22.1 L* 54.13



Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302