


Concrete

| | | |
|----------------------------|--|-------------------------|
| Coleção | Concrete + Composed | |
| Número Do Produto | 094UV | |
| Construção | SPC Multicamada Com Base De Cortiça Anexada | |
| classe | Class III, Type B | |
| Manta Inferior Adicional | Cortiça | |
| Acabamento | ExoGuard® | |
| | U.s. | Metric |
| Dimensões Nominais | 19 in w x 24 in l | 47 cm w x 61 cm l |
| Dimensões Reais | 18.50 in w x 24.02 in l | 46.99 cm w x 61.01 cm l |
| Espessura Da Camada De Uso | 20 mil (0.02 in) | 0.51 mm |
| Espessura Total Do Produto | 0.217 in | 5.5 mm |
| Perfil De Borda | Micro-Chanfrado | |
| Installation Type | Click | |
| Instalação | Floating Or Direct Glue | |
| Adesivo Recomendado | , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, , 4151 Multi-Use Premium 4 Gallon or SHAW 4100 4 GAL | |

Empacotamento

| | | |
|-----------------|-------------|-----------|
| Peças Por Caixa | 10 pcs | |
| Área Por Caixa | 30.86 sq ft | 2.87 sq m |
| Peso Por Caixa | 52.91 lbs | 24 kg |

Método De Instalação Recomendado

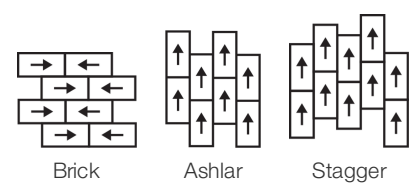

Produtos Coordenados

COREtec: Composed

desempenho + teste

| | |
|---|---|
| recuo residual (ASTM F1914) | Passes |
| resistência ao calor (ASTM F1514) | Passes |
| resistência à luz (ASTM F1515) | Passes |
| painel radiante (ASTM E648) | Passes, Class I |
| coeficiente de atrito (ASTM D2407, resistência ao deslizamento) | >0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantias

15 Anos Comercial Limitada

Atributos + Certificações

| | |
|---|---|
| Health & Wellbeing | |
| Material Ingredient Transparency | Health Product Declaration (HPD) 1000 ppm Disclosure |
| Indoor Air Quality | FloorScore® Certificado |
| Climate Impact | |
| Environmental Product Declaration (EPD) | 3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017 |
| Embodied Carbon (Cradle to Gate) | 11.8 Kg Co ₂ /M ² |
| Total Recycled Content | 0% (Pre-Consumer 0% Post-Consumer 0%) |
| Global Product Assessment | CE Marking (EN 14041) Certificado 3rd Party |
| | Country of Origin China |

WELL V2 Contribution Credit

| | |
|--|--|
| X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition | Absence of Asbestos |
| X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt | Absence of Heavy Metals |
| X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt | Absence of Halogenated Flame Retardants |
| Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt | Ortho-Phthalates |
| X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt | Greenguard Gold Certificate |

Crédito De Contribuição

| | |
|--|---|
| MR Credit: Divulgação e otimização de produtos de construção | 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017 |
| Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD) | FloorScore® Certified |
| Crédito de EQ: Materiais de baixa emissão | |
| Opção 1: cálculos de categoria de produto | |

Installation Guidelines

Maintenance Guidelines

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways

| | | | |
|--|---|---|--|
|  |  |  |  |
| Misty Quartz 03501 LRV 51.2 L* 76.8 | Tempered Concre 03502 LRV 28.1 L* 59.95 | Rugged Platinum 03503 LRV 23.2 L* 55.33 | Forged Concrete 03507 LRV 22.1 L* 54.13 |

