


Concrete

Coleção	Concrete + Composed	
Número Do Produto	094UV	
Construção	SPC Multicamada Com Base De Cortiça Anexada	
classe	Class III, Type B	
Manta Inferior Adicional	Cortiça	
Acabamento	ExoGuard®	
	U.s.	Metric
Dimensões Nominais	19 in w x 24 in l	47 cm w x 61 cm l
Dimensões Reais	18.50 in w x 24.02 in l	46.99 cm w x 61.01 cm l
Espessura Da Camada De Uso	20 mil (0.02 in)	0.51 mm
Espessura Total Do Produto	0.217 in	5.5 mm
Perfil De Borda	Micro-Chanfrado	
Installation Type	Click	
Instalação	Floating Or Direct Glue	
Adesivo Recomendado	, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, , 4151 Multi-Use Premium 4 Gallon or SHAW 4100 4 GAL	

Empacotamento

Peças Por Caixa	10 pcs	
Área Por Caixa	30.86 sq ft	2.87 sq m
Peso Por Caixa	52.91 lbs	24 kg

Método De Instalação Recomendado

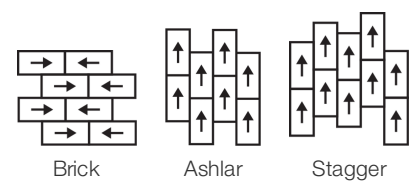

Produtos Coordenados

COREtec: Composed

Desempenho + Teste

Recuo Residual (Astm F1914)	Passes
Resistência Ao Calor (Astm F1514)	Passes
Resistência À Luz (Astm F1515)	Passes
Painel Radiante (Astm E648)	Passes, Class I
Coefficiente De Atrito (Astm D2407, Resistência Ao Deslizamento)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantias

15 Anos Comercial Limitada

Atributos + Certificações

Health & Wellbeing

Material Ingredient Transparency	Health Product Declaration (HPD)   1000 ppm Disclosure
Indoor Air Quality	FloorScore®   Certificado

Climate Impact

Environmental Product Declaration (EPD)	3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017
Total Recycled Content	0% (Pre-Consumer 0%   Post-Consumer 0%)

Global Product Assessment

CE Marking (EN 14041)   Certificado 3rd Party
Country of Origin   China

Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)	FloorScore Certified
Crédito de EQ: Materiais de baixa emissão	
Opção 1: cálculos de categoria de produto	
Installation Guidelines	Please visit <a href="http://www.shawcontract.com">www.shawcontract.com</a> for the most current warranty information.
Maintenance Guidelines	Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

\*\*\*\*\*Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways

			
Misty Quartz 03501 LRV 51.2   L* 76.8	Tempered Concre 03502 LRV 28.1   L* 59.95	Rugged Platinum 03503 LRV 23.2   L* 55.33	Forged Concrete 03507 LRV 22.1   L* 54.13