


Concrete

系列	Concrete + Composed	
款型编号	094UV	
结构	软木底多层复合	
类型	Class III, Type B	
附加垫层	软木	
表面处理	ExoGuard®	
公称尺寸 实际尺寸 耐磨层厚度 产品整体厚度 边缘轮廓 Installation Type 安装方式 胶粘剂建议	美国	尺寸标准
	19 in w x 24 in l	47 cm w x 61 cm l
	18.50 in w x 24.02 in l	46.99 cm w x 61.01 cm l
	20 mil (0.02 in)	0.51 mm
	0.217 in	5.5 mm
	微斜角	
	Click	
Floating Or Direct Glue		
, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, , 4151 Multi-Use Premium 4 Gallon or SHAW 4100 4 GAL		

包装

每盒件数	10 pcs	
每箱面积	30.86 sq ft	2.87 sq m
每箱重量	52.91 lbs	24 kg

铺装建议

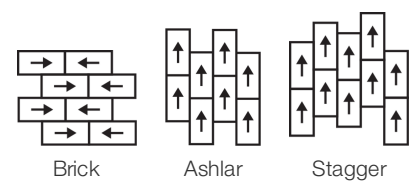

搭配产品

COREtec: Composed

性能 + 测试

残余压痕 (ASTM F1914)	Passes
耐热性 (ASTM F1514)	Passes
耐光性 (ASTM F1515)	Passes
辐射板 (ASTM E648)	Passes, Class I
摩擦系数 (ASTM D2407, 防滑性)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

质保

15年商用有限质保

属性+认证

Health & Wellbeing

Material Ingredient Transparency
Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure
FloorScore® | 认证

Climate Impact

Environmental Product Declaration (EPD)
Embodied Carbon (Cradle to Gate)
Total Recycled Content

通过ISO 14025、EN 15804和ISO 21930 : 2017等第三方认证
11.8 Kg CO₂/M²
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

CE Marking (EN 14041) | 第三方认证
Country of Origin | 中国

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

Absence of Asbestos
Absence of Heavy Metals
Absence of Halogenated Flame Retardants

Ortho-Phthalates
Greenguard Gold Certificate

绿色leed贡献信用

MR Credit : 建立产品披露和优化
环境产品声明-选项1 : 环境产品声明 (EPD)

EQ信用 : 低排放材料
选项1 : 产品类别计算

[Installation Guidelines](#)
[Maintenance Guidelines](#)

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
FloorScore® Certified

Please visit www.shawcontract.com for the most current warranty information.
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways



Misty Quartz 03501
LRV 51.2 | L* 76.8



Tempered Concre 03502
LRV 28.1 | L* 59.95



Rugged Platinum 03503
LRV 23.2 | L* 55.33



Forged Concrete 03507
LRV 22.1 | L* 54.13

