

Concrete


Collection	Concrete + Composed	
Numéro Du Style	094UV	
Construction	Cps Multicouche Avec Sous-Couche De Liège Attachée	
Classement	Class III, Type B	
Sous-couche Intégrée	Liège	
Finition	ExoGuard®	
	U.s.	Metric
Dimensions Nominales	19 in w x 24 in l	47 cm w x 61 cm l
Dimensions Réelles	18.50 in w x 24.02 in l	46.99 cm w x 61.01 cm l
Épaisseur De La Couche d'Usure	20 mil (0.02 in)	0.51 mm
Épaisseur Générale Du Produit	0.217 in	5.5 mm
Profil Du Bord	Micro-Biseau	
Installation Type	Click	
Installation	Floating Or Direct Glue	
Adhésif Recommandé	4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon, 4151 Multi-Use Premium 4 Gallon or SHAW 4100 4 GAL	



Packaging

Pièces Par Carton	10 pcs	
Surface Par Carton	30.86 sq ft	2.87 sq m
Poids Par Carton	52.91 lbs	24 kg

Méthodes d'Installation Conseillées

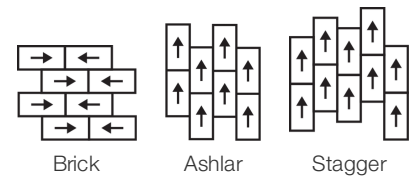

Coordination Des Produits

COREtec: Composed

Performance + Tests Et Essai

Empreinte Résiduelle (Astm F1914)	Passes
Résistance À La Chaleur (Astm F1514)	Passes
Résistance À La Lumière (Astm F1515)	Passes
Coefficient De Frottement (Astm D2407, Résistance Au Glissement)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garanties

Limitée Commerciale De 15 Ans

Attributs + Certifications

Déclaration sanitaire de produit (HPD)	1000 ppm Disclosure
Déclaration environnementale de produit (EPD)	Certifié Par Un Organisme Tiers Conformément Aux Normes ISO 14025, EN15804 & ISO 21930:2017
FloorScore®	Certifié
Label CE (EN 14041)	Certifié Par Un Organisme Tiers
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
pays d'origine	Chine

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	Absence of Asbestos
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization	Absence of Heavy Metals
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization	Absence of Halogenated Flame Retardants
X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization	Ortho-Phthalates
X11 Long Term Emissions Control Part 2: Flooring Optimization	Greenguard Gold Certificate

Contribution À La Certification Leed

MR Credit: Building Product Disclosure and Optimisation Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
"Crédit EQ : matériaux faibles émissions Option 1 : calculs par catégorie de produit"	FloorScore Certified
Installation Guidelines	Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.
Maintenance Guidelines	

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit shawcontract.com/testing for more information.

Indice De Réflexion Lumineuse

			
Misty Quartz 03501 LRV 51.2	Tempered Concre 03502 LRV 28.1	Rugged Platinum 03503 LRV 23.2	Forged Concrete 03507 LRV 22.1

