

Concrete


コレクション	Concrete + Composed	
スタイルナンバー	094UV	
建設	コルク下敷を含む多層SPC	
クラス	Class III, Type B	
付属下敷	コルク	
仕上げ	ExoGuard®	
公称寸法	米国	メートル法
	19 in w x 24 in l	47 cm w x 61 cm l
実際の寸法	18.50 in w x 24.02 in l	46.99 cm w x 61.01 cm l
摩耗層の厚さ	20 mil (0.02 in)	0.51 mm
製品全体の厚さ	0.217 in	5.5 mm
エッジプロファイル	マイクロベベル	
Installation Type	Click	
インストール	Floating Or Direct Glue	
推奨接着剤	4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon, 4151 Multi-Use Premium 4 Gallon or SHAW 4100 4 GAL	

包装

ボックスあたりの個数	10 pcs	
ボックスあたりの面積	30.86 sq ft	2.87 sq m
ボックスあたりの重量	52.91 lbs	24 kg



推奨インストール方法

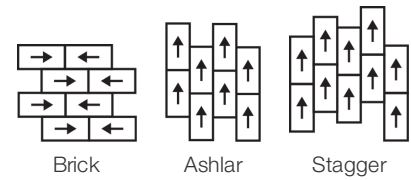

コーディネート商品

COREtec: Composed

パフォーマンス + テスト

残留圧痕 (astm F1914)	Passes
耐熱性 (astm F1514)	Passes
耐光性 (astm F1515)	Passes
摩擦係数(astm D2407、滑り抵抗)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

保証

[15年の商用限定保証](#)

属性+認定

Health & Wellbeing

Material Ingredient Transparency

Health Product Declaration (HPD) | 1000 ppm Disclosure

Climate Impact

Environmental Product Declaration (EPD)

ISO 14025、EN 15804 および ISO 21930:2017 に基づく第三者認証取得

Total Recycled Content

0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

FloorScore® | 認証取得

CE Marking (EN 14041) | 第三者認証取得

Country of Origin | 中国

グリーンリード貢献クレジット

MRクレジット：製品の開示と最適化の構築
環境製品宣言-オプション1：環境製品宣言 (EPD)EQクレジット：低排出材料
オプション1：製品カテゴリの計算

Installation Guidelines

[Maintenance Guidelines](#)**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017****FloorScore Certified**Please visit www.shawcontract.com for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways

Misty Quartz 03501
LRV 51.2Tempered Concre 03502
LRV 28.1Rugged Platinum 03503
LRV 23.2Forged Concrete 03507
LRV 22.1

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +1 800 556 302

© 2024 Shaw Industries Group, Inc., a Berkshire Hathaway Company
May 4, 2024

2 of 2