

Concrete


Collectie	Concrete + Composed	
Stijlnummer	094UV	
Uitzicht	Meerlaagse SPC Met Aangehechte Onderlaag In Kurk	
klasse	Class III, Type B	
Aangehechte Onderlaag	Kurk	
Afwerking	ExoGuard®	
	U.s.	Metric
Nominale Afmetingen	19 in w x 24 in l	47 cm w x 61 cm l
Werkelijke Afmetingen	18.50 in w x 24.02 in l	46.99 cm w x 61.01 cm l
Dikte Slijtlaag	20 mil (0.02 in)	0.51 mm
Totale Dikte Van Het Product	0.217 in	5.5 mm
Randprofiel	Micro V-Groef	
Installation Type	Click	
Installatie	Floating Or Direct Glue	
Aanbevolen Kleefstof	4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon, 4151 Multi-Use Premium 4 Gallon or SHAW 4100 4 GAL	



Verpakking

Stuks Per Doos	10 pcs	
Oppervlakte Per Doos	30.86 sq ft	2.87 sq m
Gewicht Per Doos	52.91 lbs	24 kg

Aanbevolen Installatiemethode

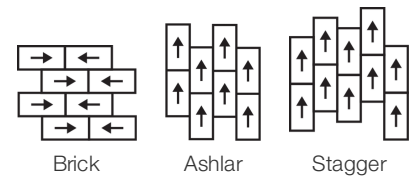

Coördinerende Producten

COREtec: Composed

Prestatie + Testen

Resterende Indeuking (Astm F1914)	Passes
Hittebestendigheid (Astm F1514)	Passes
Weerstand Tegen Licht (Astm F1515)	Passes
Wrijvingscoëfficiënt (Astm D2407, Slipweerstand)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garanties

[15 Jaar Commercieel Beperkt](#)

Kenmerken + Certificeringen

Health Product Declaration (HPD)

Environmental Product Declaration (EPD)

FloorScore®

CE-markering (EN 14041)

Total Recycled Content

land van herkomst

[1000 ppm Disclosure](#)[3de Partij Gecertificeerd in Overeenstemming Met ISO 14025, EN 15804, & ISO 21930:2017](#)[Gecertificeerd](#)**3de Partij Gecertificeerd****0% (Pre-Consumer 0% | Post-Consumer 0%)****China**

WELL V2 Contribution Credit

X01 Fundamental Material Precautions
Part 1: (C): Restrict Asbestos PreconditionX08 Hazardous Material Reduction
Part 1: Limit Hazardous Materials OptimizationX10 Volatile Compound Reduction
Part 1 (A): Manage Volatile Organic Compounds (VOCs) OptimizationX10 Volatile Compound Reduction
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) OptimizationX11 Long Term Emissions Control
Part 2: Flooring Optimization**Absence of Asbestos****Absence of Heavy Metals****Absence of Halogenated Flame Retardants****Ortho-Phthalates****Greenguard Gold Certificate**

Groen Leed Bijdragekrediet

"MR-krediet: openbaarmaking en optimalisering van bouwproducten
Milieuproductverklaringen - Optie 1: Milieuproductverklaring (EPD)"

"EQ-krediet: materialen met lage emissie Optie 1: Berekeningen per productcategorie"

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**FloorScore Certified**[Installation Guidelines](#)[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information.
Specifications are subject to nominal manufacturing variance. Material supply
and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of
this design in the creation of another product design is also strictly prohibited.
*****Allowable spend is domestic (US) spend in categories in which we have diverse
suppliers from which to choose. Compared to non-allowable spend which includes
categories in which we do not have domestic, small or diverse suppliers available to
meet our needs.

Visit shawcontract.com/testing for more information.

Lichtreflectiewaarde

			
Misty Quartz 03501 LRV 51.2	Tempered Concre 03502 LRV 28.1	Rugged Platinum 03503 LRV 23.2	Forged Concrete 03507 LRV 22.1

