

Concrete


Coleção	Concrete + Composed	
Número Do Produto	094UV	
Construção	SPC Multicamada Com Base De Cortiça Anexada	
classe	Class III, Type B	
Manta Inferior Adicional	Cortiça	
Acabamento	ExoGuard®	
	U.s.	Metric
Dimensões Nominais	19 in w x 24 in l	47 cm w x 61 cm l
Dimensões Reais	18.50 in w x 24.02 in l	46.99 cm w x 61.01 cm l
Espessura Da Camada De Uso	20 mil (0.02 in)	0.51 mm
Espessura Total Do Produto	0.217 in	5.5 mm
Perfil De Borda	Micro-Chanfrado	
Installation Type	Click	
Instalação	Floating Or Direct Glue	
Adesivo Recomendado	4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon, 4151 Multi-Use Premium 4 Gallon or SHAW 4100 4 GAL	



Empacotamento

Peças Por Caixa	10 pcs	
Área Por Caixa	30.86 sq ft	2.87 sq m
Peso Por Caixa	52.91 lbs	24 kg

Método De Instalação Recomendado

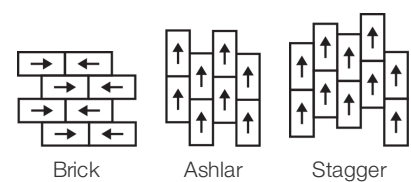

Produtos Coordenados

COREtec: Composed

Desempenho + Teste

Recuo Residual (Astm F1914)	Passes
Resistência Ao Calor (Astm F1514)	Passes
Resistência À Luz (Astm F1515)	Passes
Coeficiente De Atrito (Astm D2407, Resistência Ao Deslizamento)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantias

[15 Anos Comercial Limitada](#)

Atributos + Certificações

Health & Wellbeing

Material Ingredient Transparency

Health Product Declaration (HPD) | 1000 ppm Disclosure

Climate Impact

Environmental Product Declaration (EPD)

3rd Party Certified De Acordo Com ISO 14025, EN 15804, & ISO 21930:2017

Total Recycled Content

0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

FloorScore® | Certificado

CE Marking (EN 14041) | Certificado 3rd Party

Country of Origin | China

Crédito De Contribuição

MR Credit: Divulgação e otimização de produtos de construção
Declarações ambientais do produto - Opção 1: Declaração ambiental do produto (EPD)

3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017

FloorScore Certified

Crédito de EQ: Materiais de baixa emissão
Opção 1: cálculos de categoria de produto

Installation Guidelines


Maintenance Guidelines

Please visit www.shawcontract.com for the most current warranty information.
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit shawcontract.com/testing for more information.

Available Colorways



Misty Quartz 03501
LRV 51.2



Tempered Concre 03502
LRV 28.1



Rugged Platinum 03503
LRV 23.2



Forged Concrete 03507
LRV 22.1



Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +1 800 556 302