

Terrain II 30 Mil


Collection	Terrain II	
Style Number	0892V	
Construction	Heavy Commercial Luxury Vinyl Tile	
Class / ASTM F1700	Class III, Type B	
Finish	ExoGuard+®	
	U.s.	Metric
Nominal Dimensions	6 in w x 48 in l	15 cm w x 122 cm l
Actual Dimensions	5.96 in w x 48.00 in l	15.14 cm w x 121.92 cm l
Wear Layer Thickness	30 mil (0.03 in)	0.76 mm
Overall Thickness	0.118 in	3 mm
Edge Profile	Squared Edge	
Installation Type	Dry Back	
Installation	Direct Glue	
Recommended Adhesive	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

Packaging

Pieces Per Carton	18 pcs	
Area Per Carton	35.76 sq ft	3.32 sq m
Weight Per Carton	33.3 lbs	15.1 kg



Recommended Installation Method

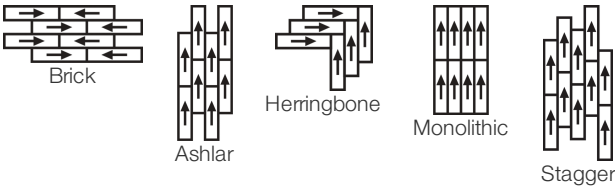

Coordinating Products

LVT: Terrain II 12 Mil, Terrain II 20 Mil

Performance + Testing

Static Load (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
Residual Indentation (ASTM F1914)	Passes	
Resistance to Heat (ASTM F1514)	Passes	
Resistance to Light (ASTM F1515)	Passes	
Resistance to Chemicals (ASTM F925)	Passes	
Radiant Panel (ASTM E648)	Passes, Class I	
coefficient of friction (ASTM D2407, slip resistance)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes	
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

Warranties

[Commercial 15 Year Underbed Bond Warranty](#)  
[15 Year Commercial Limited](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing

Material Ingredient Transparency	Health Product Declaration (HPD)   1000 ppm Disclosure
Indoor Air Quality	FloorScore®   Certified

Climate Impact

Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
Embodied Carbon (Cradle to Gate)	9.59 Kg CO <sub>2</sub> /M <sup>2</sup>
Total Recycled Content	30% (Pre-Consumer 30%   Post-Consumer 0%)

Global Product Assessment

Environmental Guarantee\* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost to The Customer.

CE Marking (EN 14041) | 3rd Party Certified

Country of Origin | United States

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition  
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt  
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt  
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

Absence of Asbestos  
Absence of Heavy Metals  
Absence of Halogenated Flame Retardants  
  
Ortho-Phthalates  
FloorScore® Certificate

Green Leed Contribution Credit













MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 1: Material Ingredient Reporting  
  
MR Credit: Building Product Disclosure and Optimization  
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)  
  
EQ Credit: Low Emitting Materials  
Option 1: Product Category Calculations

Health Product Declaration (HPD) | 100 Ppm Disclosure  
  
3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017  
FloorScore® Certified

Additional Information

\* To learn more about the recyclability of our products and our Environmental Guarantee, please visit [shawcontract.com/sustainability](http://shawcontract.com/sustainability).  
[Installation Guidelines](#)  
[Maintenance Guidelines](#)  
  
Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.  
  
This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.  
  
Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways

 Satinwood 00140 V3 - Moderate Variation	 Willow 00170 V4 - Substantial Variation	 Thatch 00173 LRV 32.3   L* 63.61 V2 - Slight Variation	 Ash 00174 V3 - Moderate Variation	 Butternut 00210 V3 - Moderate Variation	 Saffron 00230 V2 - Slight Variation
 Prime 00240 V3 - Moderate Variation	 Trail 00256 V2 - Slight Variation	 Olive 00350 V2 - Slight Variation	 Spruce 00360 V2 - Slight Variation	 Aqua 00370 V2 - Slight Variation	 Azure 00400 V2 - Slight Variation



					
Ink 00450 V2 - Slight Variation	Poplar 00515 V3 - Moderate Variation	Slate 00540 V2 - Slight Variation	Shade 00564 V2 - Slight Variation	Root 00568 V3 - Moderate Variation	Timber 00572 V2 - Slight Variation
					
Graphite 00580 V2 - Slight Variation	Terra 00600 V2 - Slight Variation	Redwood 00650 V2 - Slight Variation	Taun 00660 V3 - Moderate Variation	Pirch 00684 V2 - Slight Variation	Natural 00710 V2 - Slight Variation
					
Lodge 00740 V2 - Slight Variation	Elm 00761 V3 - Moderate Variation	Grove 00769 V3 - Moderate Variation	Nest 00774 V2 - Slight Variation	Echo 00775 LRV 26.3   L* 58.27 V2 - Slight Variation	Cherry 00850 V2 - Slight Variation
					
Violet 00965 V2 - Slight Variation	Summit 05012 V3 - Moderate Variation	Orchard 05013 LRV 35.7   L* 66.29 V2 - Slight Variation	Lark 05016 LRV 8.6   L* 35.15 V3 - Moderate Variation	Aspen 05019 V3 - Moderate Variation	Sequoia 07003 V3 - Moderate Variation
					
Sumac 07004 V3 - Moderate Variation	Alder 07005 V3 - Moderate Variation	Thicket 07008 V3 - Moderate Variation			

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

