

Terrain II 30 Mil


Collection	Terrain II	
Numéro De Style	0892V	
Construction	Carreau De Vinyle De Luxe Commercial Lourd	
classe	Class III, Type B	
Finition	ExoGuard+®	
	Impérial	Métrique
Dimensions Nominales	6 in w x 48 in l	15 cm w x 122 cm l
Dimensions Réelles	5.96 in w x 48.00 in l	15.14 cm w x 121.92 cm l
Épaisseur De La Couche d'Usure	30 mil (0.03 in)	0.76 mm
Épaisseur Générale Du Produit	0.118 in	3 mm
Profil Du Bord	Bord Carré	
Installation Type	Dry Back	
Installation	Direct Glue	
Adhésif Recommandé	S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail or 4151 Multi-Use Premium 4 Gallon	



Emballage

Pièces Par Carton	18 pcs	
Surface Par Carton	35.76 sq ft	3.32 sq m
Poids Par Carton	33.3 lbs	15.1 kg

Méthodes d'Installation Conseillées

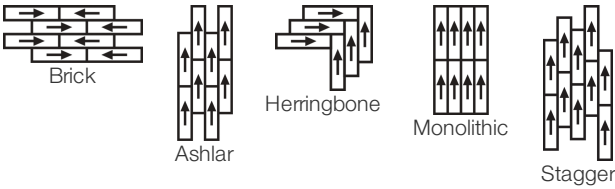

Coordination Des Produits

LVT: Terrain II 12 Mil, Terrain II 20 Mil, Terrain II 20 Mil 5 Mm, Terrain II 12 Mil 2.0
Rigid Core: Terrain II Rigid Core

performance + Tests et essai

charge statique (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
poinçonnement rémanent (ASTM F1914)	Passes	
résistance à la chaleur (ASTM F1514)	Passes	
résistance à la lumière (ASTM F1515)	Passes	
résistance chimique (ASTM F925)	Passes	
Essai au panneau radiant (Astm E648)	Passes, Class I	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes
coefficient de frottement (ASTM D2407, résistance au glissement)		
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

Garanties

- Limitée Commerciale De 15 Ans
- Commercial 15 Year Underbed Bond Warranty

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Attributs + Certifications

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD) 1000 ppm Disclosure
Indoor Air Quality	FloorScore® Agréé
Climate Impact	
Environmental Product Declaration (EPD)	Certifié Par Une Tierce Partie Conformément Aux Normes ISO 14025, EN 15804 Et ISO 21930:2017
Embodied Carbon (Cradle to Gate)	9.59 Kg Co ₂ /M ²
Total Recycled Content	30% (Pre-Consumer 30% Post-Consumer 0%)
Global Product Assessment	Environmental Guarantee* Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost to The Customer.
	CE Marking (EN 14041) Certifié Par Un Tiers
	Country of Origin United States

WELL V2 Contribution Credit

- X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition
- X08 Réduction des matières dangereuses Partie 1 : Optimisation des limites des matières dangereuses – 1 pt
- X10 Réduction des composés volatils Partie 1 (A) : Gérer l'optimisation des composés organiques volatils (COV) - 1 pt
- Partie 2 : Gérer l'optimisation des composés organiques semi-volatils (COSV) - 1 pt
- X11 Contrôle des émissions à long terme Partie 2 : Optimisation des revêtements de sol – 1 pt

- Absence of Asbestos
- Absence of Heavy Metals
- Absence of Halogenated Flame Retardants
- Ortho-Phthalates
- FloorScore Certificate

Contribution Au Certificat Vert Leed

- « Crédit MR : Divulgation et optimisation des produits de construction
- « Crédit MR : Divulgation et optimisation des produits de construction

- Health Product Declaration (HPD) | 100 Ppm Disclosure
- 3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
- FloorScore Certified

Crédit EQ : matériaux faibles émissions

Informations Supplémentaires

* To learn more about the recyclability of our products and our Environmental Guarantee, please visit shawcontract.com/sustainability.

[Installation Guidelines](#)













[Maintenance Guidelines](#)


Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.


Visit shawcontract.com/testing for more information.

Available Colorways

					
Satinwood 00140 V3 - Moderate Variation	Willow 00170 V4 - Substantial Variation	Thatch 00173 LRV 32.3 L* 63.61 V2 - Slight Variation	Ash 00174 V3 - Moderate Variation	Butternut 00210 V3 - Moderate Variation	Saffron 00230 V2 - Slight Variation
					
Prime 00240 V3 - Moderate Variation	Trail 00256 V2 - Slight Variation	Olive 00350 V2 - Slight Variation	Spruce 00360 V2 - Slight Variation	Aqua 00370 V2 - Slight Variation	Azure 00400 V2 - Slight Variation



Ink 00450
V2 - Slight Variation




Poplar 00515
V3 - Moderate Variation



Slate 00540
V2 - Slight Variation



Shade 00564
V2 - Slight Variation




Root 00568
V3 - Moderate Variation




Timber 00572
V2 - Slight Variation



Graphite 00580
V2 - Slight Variation



Terra 00600
V2 - Slight Variation



Redwood 00650
V2 - Slight Variation




Taun 00660
V3 - Moderate Variation



Pirch 00684
V2 - Slight Variation



Natural 00710
V2 - Slight Variation



Lodge 00740
V2 - Slight Variation



Elm 00761
V3 - Moderate Variation




Grove 00769
V3 - Moderate Variation



Nest 00774
V2 - Slight Variation




Echo 00775
LRV 26.3 | L* 58.27
V2 - Slight Variation




Cherry 00850
V2 - Slight Variation




Violet 00965
V2 - Slight Variation




Summit 05012
V3 - Moderate Variation




Orchard 05013
LRV 35.7 | L* 66.29
V2 - Slight Variation



Lark 05016
LRV 8.6 | L* 35.15
V3 - Moderate Variation



Aspen 05019
V3 - Moderate Variation




Sequoia 07003
V3 - Moderate Variation



Sumac 07004
V3 - Moderate Variation



Alder 07005
V3 - Moderate Variation



Thicket 07008
V3 - Moderate Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

