

Terrain II 30 Mil


コレクション	Terrain II	
スタイルナンバー	0892V	
建設	Heavy Commercial Luxury Vinyl Tile	
クラス	Class III, Type B	
仕上げ	ExoGuard+®	
	米国	メートル法
公称寸法	6 in w x 48 in l	15 cm w x 122 cm l
実際の寸法	5.96 in w x 48.00 in l	15.14 cm w x 121.92 cm l
摩耗層の厚さ	30 mil (0.03 in)	0.76 mm
製品全体の厚さ	0.118 in	3 mm
エッジプロファイル	スクエア エッジ	
Installation Type	Dry Back	
インストール	Direct Glue	
推奨接着剤	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

包装

ボックスあたりの個数	18 pcs	
ボックスあたりの面積	35.76 sq ft	3.32 sq m
ボックスあたりの重量	33.3 lbs	15.1 kg



推奨インストール方法

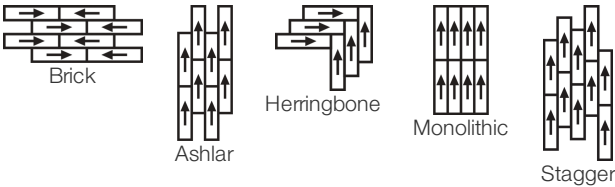

コーディネート商品

LVT: Terrain II 12 Mil, Terrain II 20 Mil

パフォーマンス + テスト

静荷重 (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
残留圧痕 (ASTM F1914)	Passes	
耐熱性 (ASTM F1514)	Passes	
耐光性 (ASTM F1515)	Passes	
耐薬品性 (ASTM F925)	Passes	
放射パネル (ASTM E648)	Passes, Class I	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes
摩擦係数(ASTM D2407、滑り抵抗)		
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

保証

[15年の商用限定保証](#)  
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

属性+認定

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD)   1000 ppm Disclosure
Indoor Air Quality	FloorScore®   認証取得
Climate Impact	
Environmental Product Declaration (EPD)	ISO 14025、EN 15804 および ISO 21930:2017 に基づく 第三者認証取得
Embodied Carbon (Cradle to Gate)	9.59 Kg CO <sub>2</sub> /M <sup>2</sup>
Total Recycled Content	30% (Pre-Consumer 30%   Post-Consumer 0%)
Global Product Assessment	Environmental Guarantee*   Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost to The Customer.
	CE Marking (EN 14041)   第三者認証取得
	Country of Origin   United States

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition  
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt  
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt  
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

Absence of Asbestos  
Absence of Heavy Metals  
Absence of Halogenated Flame Retardants  
  
Ortho-Phthalates  
FloorScore® Certificate

グリーンリード貢献クレジット

MRクレジット：製品の開示と最適化の構築  
材料成分-オプション1：材料成分レポート  
MRクレジット：製品の開示と最適化の構築  
環境製品宣言-オプション1：環境製品宣言（EPD）  
EQクレジット：低排出材料  
オプション1：製品カテゴリの計算

Health Product Declaration (HPD) | 100 Ppm Disclosure  
  
3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017  
FloorScore® Certified

追加情報

\* To learn more about the recyclability of our products and our Environmental Guarantee, please visit [shawcontract.com/sustainability](http://shawcontract.com/sustainability).






[Installation Guidelines](#)  
[Maintenance Guidelines](#)


Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.  
Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.


Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

Available Colorways

					
Satinwood 00140 V3 - Moderate Variation	Willow 00170 V4 - Substantial Variation	Thatch 00173 LRV 32.3   L* 63.61 V2 - Slight Variation	Ash 00174 V3 - Moderate Variation	Butternut 00210 V3 - Moderate Variation	Saffron 00230 V2 - Slight Variation
					
Prime 00240 V3 - Moderate Variation	Trail 00256 V2 - Slight Variation	Olive 00350 V2 - Slight Variation	Spruce 00360 V2 - Slight Variation	Aqua 00370 V2 - Slight Variation	Azure 00400 V2 - Slight Variation



Ink 00450  
V2 - Slight Variation



Poplar 00515  
V3 - Moderate Variation



Slate 00540  
V2 - Slight Variation



Shade 00564  
V2 - Slight Variation




Root 00568  
V3 - Moderate Variation




Timber 00572  
V2 - Slight Variation



Graphite 00580  
V2 - Slight Variation




Terra 00600  
V2 - Slight Variation



Redwood 00650  
V2 - Slight Variation




Taun 00660  
V3 - Moderate Variation




Pirch 00684  
V2 - Slight Variation




Natural 00710  
V2 - Slight Variation




Lodge 00740  
V2 - Slight Variation



Elm 00761  
V3 - Moderate Variation




Grove 00769  
V3 - Moderate Variation




Nest 00774  
V2 - Slight Variation




Echo 00775  
LRV 26.3 | L\* 58.27  
V2 - Slight Variation




Cherry 00850  
V2 - Slight Variation




Violet 00965  
V2 - Slight Variation




Summit 05012  
V3 - Moderate Variation




Orchard 05013  
LRV 35.7 | L\* 66.29  
V2 - Slight Variation




Lark 05016  
LRV 8.6 | L\* 35.15  
V3 - Moderate Variation



Aspen 05019  
V3 - Moderate Variation




Sequoia 07003  
V3 - Moderate Variation



Sumac 07004  
V3 - Moderate Variation



Alder 07005  
V3 - Moderate Variation



Thicket 07008  
V3 - Moderate Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

