

Terrain II 30 Mil


Collection	Terrain II	
Style Number	0892V	
Construction	Heavy Commercial Luxury Vinyl Tile	
Class / ASTM F1700	Class III, Type B	
Finish	ExoGuard+®	
	U.s.	Metric
Nominal Dimensions	6 in w x 48 in l	15 cm w x 122 cm l
Actual Dimensions	5.96 in w x 48.00 in l	15.14 cm w x 121.92 cm l
Wear Layer Thickness	30 mil (0.03 in)	0.76 mm
Overall Thickness	0.118 in	3 mm
Edge Profile	Squared Edge	
Installation Type	Dry Back	
Installation	Direct Glue	
Recommended Adhesive	S150-95 Resilient Tile Spray, 4200 Resilient Tile 4 Gallon, 2200 Resilient Tile 4 Gallon or 4151 Multi-Use Premium 4 Gallon	

Packaging

Pieces Per Carton	18 pcs	
Area Per Carton	35.76 sq ft	3.32 sq m
Weight Per Carton	33.3 lbs	15.1 kg



Recommended Installation Method

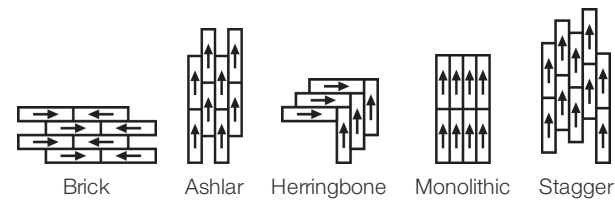

Coordinating Products

LVT: Terrain II 12 Mil, Terrain II 20 Mil

Performance + Testing

Residual Indentation (Astm F1914)	Passes
Resistance To Heat (Astm F1514)	Passes
Resistance To Light (Astm F1515)	Passes
Resistance To Chemicals (Astm F925)	Passes
Coefficient Of Friction (Astm D2407, Slip Resistance)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

15 Year Commercial Limited
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity, Equity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend***** is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD) 1000 ppm Disclosure
Climate Impact	
Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
Total Recycled Content	30% (Pre-Consumer 30% Post-Consumer 0%)
Global Product Assessment	Environmental Guarantee* Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost to The Customer. FloorScore® Certified CE Marking (EN 14041) 3rd Party Certified Country of Origin United States































Green Leed Contribution Credit

MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 1: Material Ingredient Reporting	Health Product Declaration (HPD) 100 Ppm Disclosure
MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
EQ Credit: Low Emitting Materials Option 1: Product Category Calculations	FloorScore Certified

Additional Information

<p>* To learn more about the recyclability of our products and our Environmental Guarantee, please visit shawcontract.com/sustainability.</p> <p>Installation Guidelines</p> <p>Maintenance Guidelines</p>	<p>Please visit www.shawcontract.com for the most current warranty information.</p> <p>Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.</p> <p>This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.</p> <p>*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.</p> <p>Visit shawcontract.com/testing for more information.</p>
------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Available Colorways

 <div>Satinwood 00140</div>	 <div>Willow 00170 V3 - Moderate Variation</div>	 <div>Thatch 00173 LRV 32.3 V2 - Slight Variation</div>	 <div>Ash 00174 V3 - Moderate Variation</div>	 <div>Butternut 00210</div>	 <div>Saffron 00230 V2 - Slight Variation</div>
 <div>Prime 00240</div>	 <div>Trail 00256 V2 - Slight Variation</div>	 <div>Olive 00350 V2 - Slight Variation</div>	 <div>Spruce 00360 V2 - Slight Variation</div>	 <div>Aqua 00370 V2 - Slight Variation</div>	 <div>Azure 00400 V2 - Slight Variation</div>
 <div>Ink 00450 V2 - Slight Variation</div>	 <div>Poplar 00515</div>	 <div>Slate 00540 V2 - Slight Variation</div>	 <div>Shade 00564 V2 - Slight Variation</div>	 <div>Root 00568 V3 - Moderate Variation</div>	 <div>Timber 00572 V2 - Slight Variation</div>
 <div>Graphite 00580 V2 - Slight Variation</div>	 <div>Terra 00600 V2 - Slight Variation</div>	 <div>Redwood 00650 V2 - Slight Variation</div>	 <div>Taun 00660</div>	 <div>Pirch 00684 V2 - Slight Variation</div>	 <div>Natural 00710 V2 - Slight Variation</div>
 <div>Lodge 00740 V2 - Slight Variation</div>	 <div>Elm 00761</div>	 <div>Grove 00769 V3 - Moderate Variation</div>	 <div>Nest 00774 V2 - Slight Variation</div>	 <div>Echo 00775 LRV 26.3 V2 - Slight Variation</div>	 <div>Cherry 00850 V2 - Slight Variation</div>



Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

