

In Tandem

Collection	Innate + In Tandem	
Style Number	0896V	
Construction	Commercial Bio-Based Polyurethane Heterogeneous Tile	
class	ASTM F06 (In Development)	
Finish	ExoGuard+®	
	U.s.	Metric
Nominal Dimensions	10 in w x 59 in l	25 cm w x 150 cm l
Actual Dimensions	9.84 in w x 59.05 in l	24.99 cm w x 149.99 cm l
Overall Product Thickness	0.098 in	2.5 mm
Edge Profile	Squared Edge	
Installation Type	Dry Back	
Installation	Direct Glue	
Recommended Adhesive	4200 Resilient Tile 4 Gallon	


Packaging

Pieces Per Box	12 pcs	
Area Per Box	48.44 sq ft	4.5 sq m
Weight Per Box	35.27 lbs	16 kg

Packaging can vary by color, contact 800.257.7429 to confirm packaging information prior to ordering.



Recommended Installation Method

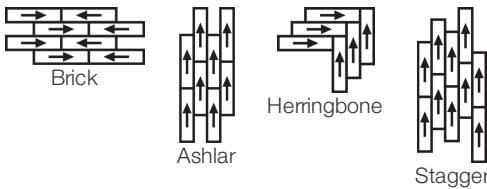

Coordinating Products

PVC-Free: Innate

performance + testing

static load (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
residual indentation (ASTM F1914)	Passes	
Flexibility (ASTM F137)	Passes	
resistance to heat (ASTM F1514)	Passes	
resistance to light (ASTM F1515)	Passes	
resistance to chemicals (ASTM F925)	Passes	
radiant panel (ASTM E648)	Passes, Class I	
coefficient of friction (ASTM D2407, slip resistance)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces	
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

Warranties

- 15 Year Commercial Limited
- Commercial 15 Year Underbed Bond Warranty

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Attributes + Certifications

Health & Wellbeing	
Material Ingredient Transparency	Greenhealth Approved   Yes Cradle to Cradle Certified™   Silver Level (Version 3.1) Health Product Declaration (HPD)   1000 ppm Disclosure Declare   LBC Compliant
Indoor Air Quality	FloorScore®   Certified
Climate Impact	
Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with EN 15804, ISO 14025
Embodied Carbon (Cradle to Gate)	2.76 Kg Co <sub>2</sub> /M <sup>2</sup>
Life-Cycle Carbon Emissions	Carbon Neutral
Total Recycled Content	0% (Pre-Consumer 0%   Post-Consumer 0%)
Global Product Assessment	
	CE Marking (EN 14041)   3rd Party Certified
	Country of Origin   Imported

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition  
 X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt  
 X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt  
 Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt  
 X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt  
 X13 Enhanced Material Precaution Part 1: Select Optimized Materials Optimization – max 2 pts  
 X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts

**C2C Silver Level (Version 3.1)**  
**C2C Silver Level (Version 3.1)**  
**C2C Silver Level (Version 3.1)**  
**C2C Silver Level (Version 3.1)**  
**FloorScore® & Greenguard Gold Certificate**  
**C2C Silver Level (Version 3.1)**  
**C2C Silver Level (Version 3.1)**

## Green Leed Contribution Credit

MR Credit: Building Product Disclosure and Optimization  
 Material Ingredients - Option 1: Material Ingredient Reporting  
 MR Credit: Building Product Disclosure and Optimization  
 Material Ingredients - Option 2: Material Ingredient Optimization  
 MR Credit: Building Product Disclosure and Optimization  
 Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)  
 MR Credit: Building Product Disclosure and Optimization  
 Sourcing of Raw Materials - Option 2: Leadership Extraction Practices  
 EQ Credit: Low Emitting Materials  
 Option 1: Product Category Calculations

**Health Product Declaration (HPD) | 100 Ppm Disclosure**  
**C2C Silver Level (Version 3.1)**  
**3rd Party Certified in Accordance with EN 15804, ISO 14025**  
**Bio-Based Materials - Meets Astm D6866 And ISO 16620-2**  
**FloorScore® Certified**

## Additional Information

\*\*Meets or exceeds all local and national regulations in country of manufacture.

[Installation Guidelines](#)


[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.


This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.


## Available Colorways




Buff 96105  
 LRV 43.9 | L\* 72.13  
 V2 - Slight Variation




Pane 96130  
 LRV 33 | L\* 64.17  
 V2 - Slight Variation




Spry 96250  
 LRV 36.4 | L\* 66.84  
 V2 - Slight Variation









Bough 96510  
 LRV 34.2 | L\* 65.15  
 V2 - Slight Variation



Winnow 96560  
 LRV 16.5 | L\* 47.69  
 V2 - Slight Variation



Link 96580  
 LRV 13.1 | L\* 42.96  
 V2 - Slight Variation

					
Groove 96590	Laurel 96600	Twain 96650	Raffia 96710	Burl 96760	Linden 96790
LRV 9.1   L* 36.08	LRV 19.5   L* 51.23	LRV 13.6   L* 43.63	LRV 24.2   L* 56.31	LRV 19   L* 50.73	LRV 13.6   L* 43.68
V2 - Slight Variation	V2 - Slight Variation	V2 - Slight Variation	V2 - Slight Variation	V2 - Slight Variation	V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

