


In Tandem

Collection	Innate + In Tandem	
Style Number	0896V	
Construction	Commercial Bio-Based Polyurethane Heterogeneous Tile	
Class / ASTM F1303	ASTM F06 (In Development)	
Finish	ExoGuard+®	
	U.s.	Metric
Nominal Dimensions	10 in w x 59 in l	25 cm w x 150 cm l
Actual Dimensions	9.84 in w x 59.05 in l	24.99 cm w x 149.99 cm l
Overall Thickness	0.098 in	2.5 mm
Edge Profile	Squared Edge	
Installation Type	Dry Back	
Installation	Direct Glue	
Recommended Adhesive	4200 Resilient Tile 4 Gallon	


Packaging

Pieces Per Carton	12 pcs	
Area Per Carton	48.44 sq ft	4.5 sq m
Weight Per Carton	35.27 lbs	16 kg

Packaging can vary by color, contact 800.257.7429 to confirm packaging information prior to ordering.

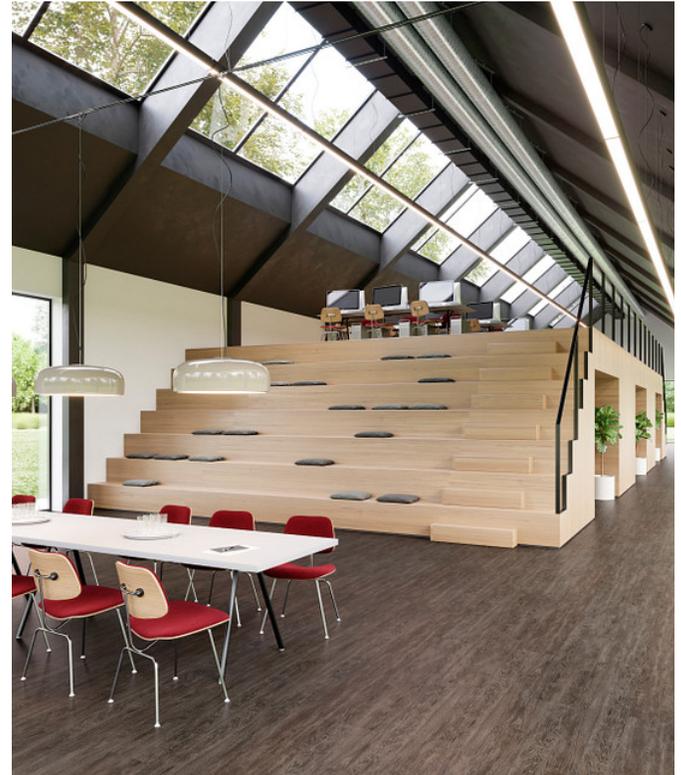

Recommended Installation Method

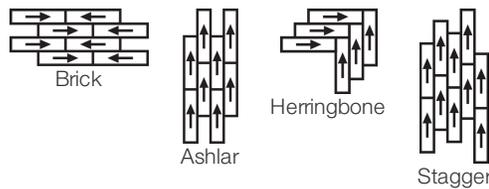

Coordinating Products

PVC-Free: Innate, In Tandem Sheet

Performance + Testing

Static Load (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
Residual Indentation (ASTM F1914)	Passes	
Flexibility (ASTM F137)	Passes	
Resistance to Heat (ASTM F1514)	Passes	
Resistance to Light (ASTM F1515)	Passes	
Resistance to Chemicals (ASTM F925)	Passes	
Radiant Panel (ASTM E648)	Passes, Class I	
coefficient of friction (ASTM D2407, slip resistance)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

- [Commercial 15 Year Underbed Bond Warranty](#)
- [15 Year Commercial Limited](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing

Material Ingredient Transparency

Greenhealth Approved | Yes
 Cradle to Cradle Certified™ | Silver Level (Version 3.1)
 Health Product Declaration (HPD) | 1000 ppm Disclosure
 Declare | LBC Compliant

Indoor Air Quality

FloorScore® | Certified

Climate Impact

- Environmental Product Declaration (EPD)
- Embodied Carbon (Cradle to Gate)
- Life-Cycle Carbon Emissions
- Total Recycled Content

3rd Party Certified in Accordance with EN 15804, ISO 14025
 2.76 Kg CO₂/M²
 Carbon Neutral
 0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

CE Marking (EN 14041) | 3rd Party Certified
 Country of Origin | Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	C2C Silver Level (Version 3.1)
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt	C2C Silver Level (Version 3.1)
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt	C2C Silver Level (Version 3.1)
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt	C2C Silver Level (Version 3.1)
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt	FloorScore® & Greenguard Gold Certificate
X13 Enhanced Material Precaution Part 1: Select Optimized Materials Optimization – max 2 pts	C2C Silver Level (Version 3.1)
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts	C2C Silver Level (Version 3.1)

Green Leed Contribution Credit

MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 1: Material Ingredient Reporting	Health Product Declaration (HPD) 100 Ppm Disclosure
MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 2: Material Ingredient Optimization	C2C Silver Level (Version 3.1)
MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with EN 15804, ISO 14025
MR Credit: Building Product Disclosure and Optimization Sourcing of Raw Materials - Option 2: Leadership Extraction Practices	Bio-Based Materials - Meets Astm D6866 And ISO 16620-2
EQ Credit: Low Emitting Materials Option 1: Product Category Calculations	FloorScore® Certified

Additional Information

**Meets or exceeds all local and national regulations in country of manufacture.

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways

					
Buff 96105 LRV 43.9 L* 72.13 V2 - Slight Variation	Pane 96130 LRV 33 L* 64.17 V2 - Slight Variation	Spry 96250 LRV 36.4 L* 66.84 V2 - Slight Variation	Bough 96510 LRV 34.2 L* 65.15 V2 - Slight Variation	Winnow 96560 LRV 16.5 L* 47.69 V2 - Slight Variation	Link 96580 LRV 13.1 L* 42.96 V2 - Slight Variation



Groove 96590
LRV 9.1 | L* 36.08
V2 - Slight Variation



Laurel 96600
LRV 19.5 | L* 51.23
V2 - Slight Variation



Twain 96650
LRV 13.6 | L* 43.63
V2 - Slight Variation



Raffia 96710
LRV 24.2 | L* 56.31
V2 - Slight Variation



Burl 96760
LRV 19 | L* 50.73
V2 - Slight Variation



Linden 96790
LRV 13.6 | L* 43.68
V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

