

In Tandem

| | | |
|----------------------|--|--------------------------|
| Collection | Innate + In Tandem | |
| Style Number | 0896V | |
| Construction | Commercial Bio-Based Polyurethane Heterogeneous Tile | |
| Class / ASTM F1303 | ASTM F06 (In Development) | |
| Finish | ExoGuard+® | |
| | U.S. | Metric |
| Nominal Dimensions | 10 in w x 59 in l | 25 cm w x 150 cm l |
| Actual Dimensions | 9.84 in w x 59.05 in l | 24.99 cm w x 149.99 cm l |
| Overall Thickness | 0.098 in | 2.5 mm |
| Edge Profile | Squared Edge | |
| Installation Type | Dry Back | |
| Installation | Direct Glue | |
| Recommended Adhesive | 4200 Resilient Tile 4 Gallon | |

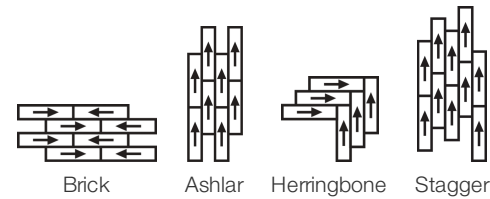
Packaging

| | | |
|-------------------|-------------|----------|
| Pieces per Carton | 12 pcs | |
| Area per Carton | 48.44 sq ft | 4.5 sq m |
| Weight per Carton | 35.27 lbs | 16 kg |

Packaging can vary by color, contact 800.257.7429 to confirm packaging information prior to ordering.



Recommended Installation Method



Coordinating Products

PVC-Free: Innate, In Tandem Sheet, Innate Sheet, Innate Linen Sheet, Innate Stria Tile

Performance + Testing

| | | |
|--|---|--|
| Static Load (ASTM F970) | Passes (Modified), *1500 lbs | *This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary. |
| Residual Indentation (ASTM F1914) | Passes | |
| Flexibility (ASTM F137) | Passes | |
| Resistance to Heat (ASTM F1514) | Passes | |
| Resistance to Light (ASTM F1515) | Passes | |
| Resistance to Chemicals (ASTM F925) | Passes | |
| Radiant Panel (ASTM E648) | Passes, Class I | |
| Coefficient of Friction (ASTM D2047, Slip Resistance) | ≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces | |
| Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number. | | |

Warranties

- 15 Year Commercial Limited Warranty
- Commercial 15 Year Underbed Bond Warranty

Diversity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw’s diverse customer base and local community. More than 42% of our spend***** is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

Material Health & Environmental Certifications

| | |
|---|---|
| Health & Wellbeing | |
| Material Ingredient Transparency | Greenhealth Approved Yes Cradle to Cradle Certified™ Silver Level (Version 3.1) Health Product Declaration (HPD) 1000 ppm Disclosure Declare LBC Compliant |
| Indoor Air Quality | FloorScore® Certified |
| Climate Impact | |
| Environmental Product Declaration (EPD) | 3rd Party Certified in Accordance with EN 15804, ISO 14025 |
| Embodied Carbon (Cradle to Gate) | 4.31 Kg Co ₂ /M ² |
| Life-Cycle Carbon Emissions | Carbon Neutral |
| Total Recycled Content | 0% (Pre-Consumer 0% Post-Consumer 0%) |
| Global Product Assessment | CE Marking (EN 14041) 3rd Party Certified Country of Origin Imported |

WELL V2 Contribution Credit

| | |
|--|--|
| X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition | C2C Silver Level (Version 3.1) |
| X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization | C2C Silver Level (Version 3.1) |
| X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization | C2C Silver Level (Version 3.1) |
| X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization | C2C Silver Level (Version 3.1) |
| X11 Long Term Emissions Control Part 2: Flooring Optimization | FloorScore & Greenguard Gold Certificate |
| X13 Enhanced Material Precaution Part 1: Select Optimized Materials Optimization | C2C Silver Level (Version 3.1) |
| X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization | C2C Silver Level (Version 3.1) |

Leed v4 Contribution Credits

| | |
|---|--|
| MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 1: Material Ingredient Reporting | Health Product Declaration (HPD) 100 Ppm Disclosure |
| MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 2: Material Ingredient Optimization | C2C Silver Level (Version 3.1) |
| MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD) | 3rd Party Certified in Accordance with EN 15804, ISO 14025 |
| MR Credit: Building Product Disclosure and Optimization Sourcing of Raw Materials - Option 2: Leadership Extraction Practices | Bio-Based Materials - Meets Astm D6866 And ISO 16620-2 |
| EQ Credit: Low Emitting Materials Option 1: Product Category Calculations | FloorScore Certified |

Additional Information

**Meets or exceeds all local and national regulations in country of manufacture.

Installation Guidelines



Maintenance Guidelines

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
*****Allowable spend is domestic (US) spend in categories in which we have diverse suppliers from which to choose. Compared to non-allowable spend which includes categories in which we do not have domestic, small or diverse suppliers available to meet our needs.

Visit shawcontract.com/testing for more information.

Available Colorways

| | | | | | |
|--|---|---|--|---|---|
|  |  |  |  |  |  |
| Buff 96105 LRV 43.9 L* 72.13 V2 - Slight Variation | Pane 96130 LRV 33 L* 64.17 V2 - Slight Variation | Spry 96250 LRV 36.4 L* 66.84 V2 - Slight Variation | Bough 96510 LRV 34.2 L* 65.15 V2 - Slight Variation | Winnow 96560 LRV 16.5 L* 47.69 V2 - Slight Variation | Link 96580 LRV 13.1 L* 42.96 V2 - Slight Variation |
|  |  |  |  |  |  |
| Groove 96590 LRV 9.1 L* 36.08 V2 - Slight Variation | Laurel 96600 LRV 19.5 L* 51.23 V2 - Slight Variation | Twain 96650 LRV 13.6 L* 43.63 V2 - Slight Variation | Raffia 96710 LRV 24.2 L* 56.31 V2 - Slight Variation | Burl 96760 LRV 19 L* 50.73 V2 - Slight Variation | Linden 96790 LRV 13.6 L* 43.68 V2 - Slight Variation |

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

