

In Tandem

Colección	Innate + In Tandem	
Número De Estilo	0896V	
clase	ASTM F06 (In Development)	
Terminación	ExoGuard+®	
	U.s.	Metric
Dimensiones Nominales	10 in w x 59 in l	25 cm w x 150 cm l
Dimensiones Reales	9.84 in w x 59.05 in l	24.99 cm w x 149.99 cm l
Espesor Total Del Producto	0.098 in	2.5 mm
Perfil De Borde	Borde Cuadrado	
Installation Type	Dry Back	
Instalación	Direct Glue	
Adhesivo Recomendado	4200 Resilient Tile 4 Gallon	


Embalaje

Piezas Por Caja	12 pcs	
Área Por Caja	48.44 sq ft	4.5 sq m
Peso Por Caja	35.27 lbs	16 kg

Packaging can vary by color, contact 800.257.7429 to confirm packaging information prior to ordering.



Método De Instalación Recomendado

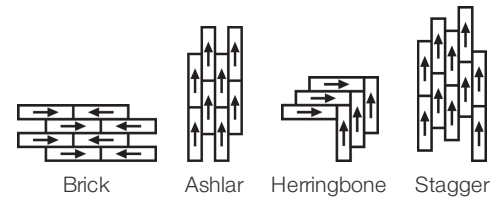

Productos Que Combinan

PVC-Free: Innate, In Tandem Sheet, Innate Sheet, Innate Linen Sheet, Innate Stria Tile

desempeño + pruebas

carga estática (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
margen adicional residual (ASTM F1914)	Passes	
Flexibility (ASTM F137)	Passes	
resistencia al calor (ASTM F1514)	Passes	
resistencia a la luz (ASTM F1515)	Passes	
resistencia a productos químicos (ASTM F925)	Passes	
panel radiante (ASTM E648)	Passes, Class I	
coeficiente de fricción (ASTM D2407, resistencia al deslizamiento)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces	
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

Garantías

[Commercial 15 Year Underbed Bond Warranty](#)
[15 Años Limitado A Uso Comercial](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificaciones

Health & Wellbeing	
Material Ingredient Transparency	Greenhealth Approved Yes Cradle to Cradle Certified™ Nivel Plata (Versión 3.1) Health Product Declaration (HPD) 1000 ppm Disclosure Declare Compatible LBC
Indoor Air Quality	FloorScore® Certificado
Climate Impact	
Environmental Product Declaration (EPD)	Certificado Tercerizado De Acuerdo Con La Norma EN 15804, ISO 14025
Embodied Carbon (Cradle to Gate)	2.76 Kg Co ₂ /M ²
Life-Cycle Carbon Emissions	Carbon Neutral
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
Global Product Assessment	
	CE Marking (EN 14041) Certificado Tercerizado Country of Origin Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	C2C Nivel Plata (Versión 3.1)
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt	C2C Nivel Plata (Versión 3.1)
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt	C2C Nivel Plata (Versión 3.1)
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt	C2C Nivel Plata (Versión 3.1)
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt	FloorScore® & Greenguard Gold Certificate
X13 Enhanced Material Precaution Part 1: Select Optimized Materials Optimization – max 2 pts	C2C Nivel Plata (Versión 3.1)
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts	C2C Nivel Plata (Versión 3.1)

Contribución Para Créditos Leed







Crédito MR: Divulgación y optimización de productos de construcción Ingredientes de materiales - Opción 1: Informe de ingredientes de los materiales	Health Product Declaration (HPD) 100 Ppm Disclosure
Crédito MR: Divulgación y optimización de productos de construcción Ingredientes de materiales - Opción 2: Optimización de ingredientes de los materiales	C2C Nivel Plata (Versión 3.1)
Crédito MR: Divulgación y optimización de productos de construcción Declaraciones ambientales de productos - Opción 1: Declaración ambiental de productos (EPD)	3rd Party Certified in Accordance with EN 15804, ISO 14025
MR Credit: Building Product Disclosure and Optimization Sourcing of Raw Materials - Option 2: Leadership Extraction Practices	Bio-Based Materials - Meets Astm D6866 And ISO 16620-2
Crédito EQ: Materiales de baja emisión Opción 1: Cálculos de categoría de producto	FloorScore® Certified

Información Adicional

**Meets or exceeds all local and national regulations in country of manufacture.	
Installation Guidelines	Please visit www.shawcontract.com for the most current warranty information.
Maintenance Guidelines	Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.
	This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
	Visit shawcontract.com/testing for more information.

Available Colorways

					
Buff 96105	Pane 96130	Spry 96250	Bough 96510	Winnow 96560	Link 96580
LRV 43.9 L* 72.13	LRV 33 L* 64.17	LRV 36.4 L* 66.84	LRV 34.2 L* 65.15	LRV 16.5 L* 47.69	LRV 13.1 L* 42.96
V2 - Slight Variation	V2 - Slight Variation	V2 - Slight Variation	V2 - Slight Variation	V2 - Slight Variation	V2 - Slight Variation

					
Groove 96590	Laurel 96600	Twain 96650	Raffia 96710	Burl 96760	Linden 96790
LRV 9.1 L* 36.08	LRV 19.5 L* 51.23	LRV 13.6 L* 43.63	LRV 24.2 L* 56.31	LRV 19 L* 50.73	LRV 13.6 L* 43.68
V2 - Slight Variation	V2 - Slight Variation	V2 - Slight Variation	V2 - Slight Variation	V2 - Slight Variation	V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

