

In Tandem

Collection	Innate + In Tandem	
Numéro De Style	0896V	
Construction	Carreaux De Tapis Hétérogène Commerciale EN Polyuréthane Biosourcé	
classe	ASTM F06 (In Development)	
Finition	ExoGuard+®	
	Impérial	Métrique
Dimensions Nominales	10 in w x 59 in l	25 cm w x 150 cm l
Dimensions Réelles	9.84 in w x 59.05 in l	24.99 cm w x 149.99 cm l
Épaisseur Générale Du Produit	0.098 in	2.5 mm
Profil Du Bord	Bord Carré	
Installation Type	Dry Back	
Installation	Direct Glue	
Adhésif Recommandé	4200 Resilient Tile 4 Gallon	


Emballage

Pièces Par Carton	12 pcs	
Surface Par Carton	48.44 sq ft	4.5 sq m
Poids Par Carton	35.27 lbs	16 kg

Packaging can vary by color, contact 800.257.7429 to confirm packaging information prior to ordering.



Méthodes d'Installation Conseillées

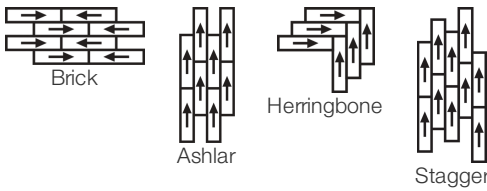

Coordination Des Produits

PVC-Free: Innate, In Tandem Sheet, Innate Sheet, Innate Linen Sheet, Innate Stria Tile

performance + Tests et essai

charge statique (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
poinçonnement rémanent (ASTM F1914)	Passes	
Flexibility (ASTM F137)	Passes	
résistance à la chaleur (ASTM F1514)	Passes	
résistance à la lumière (ASTM F1515)	Passes	
résistance chimique (ASTM F925)	Passes	
Essai au panneau radiant (Astm E648)	Passes, Class I	
coefficient de frottement (ASTM D2407, résistance au glissement)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces	
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

Garanties

- Limitée Commerciale De 15 Ans
- Commercial 15 Year Underbed Bond Warranty

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Attributs + Certifications

Health & Wellbeing	
Material Ingredient Transparency	Greenhealth Approved Yes Cradle to Cradle Certified™ Niveau Argent (Version 3.1) Health Product Declaration (HPD) 1000 ppm Disclosure Declare Conforme LBC
Indoor Air Quality	FloorScore® Agréé Greenguard Gold Agréé
Climate Impact	
Environmental Product Declaration (EPD)	Certifié Par Une Tierce Partie Conformément Aux Normes EN 15804, ISO 14025
Embodied Carbon (Cradle to Gate)	2.76 Kg Co ₂ /M ²
Life-Cycle Carbon Emissions	Carbon Neutral
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
Global Product Assessment	
CE Marking (EN 14041) Certifié Par Un Tiers Country of Origin Imported	

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition
X08 Réduction des matières dangereuses Partie 1 : Optimisation des limites des matières dangereuses – 1 pt
X10 Réduction des composés volatils Partie 1 (A) : Gérer l'optimisation des composés organiques volatils (COV) - 1 pt
Partie 2 : Gérer l'optimisation des composés organiques semi-volatils (COSV) - 1 pt
X11 Contrôle des émissions à long terme Partie 2 : Optimisation des revêtements de sol – 1 pt
X13 Enhanced Material Precaution Part 1: Select Optimized Materials Optimization - max 2 pts
X14 Transparence des matériaux Partie 1 : Promouvoir l'optimisation de la divulgation des ingrédients - max 2 pts

C2C Silver Level (Version 3.1)
C2C Silver Level (Version 3.1)
C2C Silver Level (Version 3.1)
C2C Silver Level (Version 3.1)
FloorScore® & Greenguard Gold Certificate
C2C Silver Level (Version 3.1)
C2C Silver Level (Version 3.1)

Contribution Au Certificat Vert Leed

« Crédit MR : Divulgation et optimisation des produits de construction
« Crédit MR : Divulgation et optimisation des produits de construction
« Crédit MR : Divulgation et optimisation des produits de construction

MR Credit: Building Product Disclosure and Optimization
Sourcing of Raw Materials - Option 2: Leadership Extraction Practices
Crédit EQ : matériaux faibles émissions

Health Product Declaration (HPD) | 100 Ppm Disclosure
C2C Silver Level (Version 3.1)
3rd Party Certified in Accordance with EN 15804, ISO 14025
Bio-Based Materials - Meets Astm D6866 And ISO 16620-2
FloorScore & Greenguard Gold Certified

Informations Supplémentaires

**Meets or exceeds all local and national regulations in country of manufacture.

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information.







Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways

					
Buff 96105 LRV 43.9 L* 72.13 V2 - Slight Variation	Pane 96130 LRV 33 L* 64.17 V2 - Slight Variation	Spry 96250 LRV 36.4 L* 66.84 V2 - Slight Variation	Bough 96510 LRV 34.2 L* 65.15 V2 - Slight Variation	Winnow 96560 LRV 16.5 L* 47.69 V2 - Slight Variation	Link 96580 LRV 13.1 L* 42.96 V2 - Slight Variation

					
Groove 96590	Laurel 96600	Twain 96650	Raffia 96710	Burl 96760	Linden 96790
LRV 9.1 L* 36.08	LRV 19.5 L* 51.23	LRV 13.6 L* 43.63	LRV 24.2 L* 56.31	LRV 19 L* 50.73	LRV 13.6 L* 43.68
V2 - Slight Variation	V2 - Slight Variation	V2 - Slight Variation	V2 - Slight Variation	V2 - Slight Variation	V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

