

In Tandem

수집	Innate + In Tandem	
스타일 번호	0896V	
구성	상업용 바이오 기반 폴리 우레탄 이중 타일	
수업	ASTM F06 (In Development)	
끝	ExoGuard+®	
	미국	미터법
공칭 치수	10 in w x 59 in l	25 cm w x 150 cm l
실제 치수	9.84 in w x 59.05 in l	24.99 cm w x 149.99 cm l
전체 제품 두께	0.098 in	2.5 mm
가장자리 프로파일	사각형 모서리	
Installation Type	Dry Back	
설치	Direct Glue	
권장 접착제	4200 Resilient Tile 4 Gallon	


포장

상자 당 조각	12 pcs	
상자 당 면적	48.44 sq ft	4.5 sq m
상자 당 무게	35.27 lbs	16 kg

Packaging can vary by color, contact 800.257.7429 to confirm packaging information prior to ordering.



권장 설치 방법

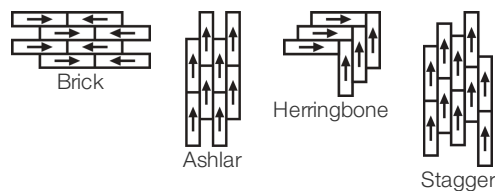

코디네이팅 제품

PVC-Free: Innate, In Tandem Sheet

공연 + 테스트

정적 하중 (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
잔차 들어 쓰기 (ASTM F1914)	Passes	
Flexibility (ASTM F137)	Passes	
내열성 (ASTM F1514)	Passes	
내광성 (ASTM F1515)	Passes	
화학 물질에 대한 내성 (ASTM F925)	Passes	
복사 패널 (ASTM E648)	Passes, Class I	
마찰 계수 (ASTM D2407, 미끄러짐 저항)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces	
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

보증

[15년 상용 제한](#)
[Commercial 15 Year Underbed Bond Warranty.](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

속성 + 인증

Health & Wellbeing	
Material Ingredient Transparency	Greenhealth Approved Yes Cradle to Cradle Certified™ Silver 레벨(버전 3.1) Health Product Declaration (HPD) 1000 ppm Disclosure Declare LBC 규격
Indoor Air Quality	FloorScore® 인증
Climate Impact	
Environmental Product Declaration (EPD)	EN 15804, ISO 14025에 따라 타사 인증 획득
Embodied Carbon (Cradle to Gate)	2.76 Kg Co ₂ /M ²
Life-Cycle Carbon Emissions	Carbon Neutral
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)
Global Product Assessment	CE Marking (EN 14041) 타사 인증 획득 Country of Origin Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition
 X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt
 X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt
 Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt
 X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt
 X13 Enhanced Material Precaution Part 1: Select Optimized Materials Optimization – max 2 pts
 X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts

C2C 실버 레벨 (버전 3.1)
C2C 실버 레벨 (버전 3.1)
C2C 실버 레벨 (버전 3.1)
C2C 실버 레벨 (버전 3.1)
FloorScore® & Greenguard Gold Certificate
C2C 실버 레벨 (버전 3.1)
C2C 실버 레벨 (버전 3.1)

녹색의 공헌 기여 크레딧

MR 크레딧 : 제품 공개 및 최적화 구축
 재료 성분-옵션 1 : 재료 성분보고
 MR 크레딧 : 제품 공개 및 최적화 구축
 재료 성분-옵션 2 : 재료 성분 최적화
 MR 크레딧 : 제품 공개 및 최적화 구축
 환경 제품 선언-옵션 1 : 환경 제품 선언 (EPD)
 MR Credit: Building Product Disclosure and Optimization
 Sourcing of Raw Materials - Option 2: Leadership Extraction Practices
 EQ 크레딧 : 저 발광 재료
 옵션 1 : 제품 범주 계산

Health Product Declaration (HPD) | 100 Ppm Disclosure
C2C 실버 레벨 (버전 3.1)
3rd Party Certified in Accordance with EN 15804, ISO 14025
Bio-Based Materials - Meets Astm D6866 And ISO 16620-2
FloorScore® Certified

추가 정보

****Meets or exceeds all local and national regulations in country of manufacture.**

[Installation Guidelines](#)







[Maintenance Guidelines](#)







Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways

					
Buff 96105 LRV 43.9 L* 72.13 V2 - Slight Variation	Pane 96130 LRV 33 L* 64.17 V2 - Slight Variation	Spry 96250 LRV 36.4 L* 66.84 V2 - Slight Variation	Bough 96510 LRV 34.2 L* 65.15 V2 - Slight Variation	Winnow 96560 LRV 16.5 L* 47.69 V2 - Slight Variation	Link 96580 LRV 13.1 L* 42.96 V2 - Slight Variation

					
Groove 96590	Laurel 96600	Twain 96650	Raffia 96710	Burl 96760	Linden 96790
LRV 9.1 L* 36.08	LRV 19.5 L* 51.23	LRV 13.6 L* 43.63	LRV 24.2 L* 56.31	LRV 19 L* 50.73	LRV 13.6 L* 43.68
V2 - Slight Variation	V2 - Slight Variation	V2 - Slight Variation	V2 - Slight Variation	V2 - Slight Variation	V2 - Slight Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

