


Innate

Collection	Innate + In Tandem	
Style Number	0895V	
Construction	Commercial Bio-Based Polyurethane Heterogeneous Tile	
Class / ASTM F1700	ASTM F06 (In Development)	
Finish	ExoGuard+®	
	U.s.	Metric
Nominal Dimensions	13 in w x 26 in l	33 cm w x 67 cm l
Actual Dimensions	13.18 in w x 26.38 in l	33.48 cm w x 67.01 cm l
Overall Thickness	0.098 in	2.5 mm
Edge Profile	Squared Edge	
Installation Type	Dry Back	
Installation	Direct Glue	
Recommended Adhesive	4200 Resilient Tile 4 Gallon	
Packaging		
Pieces Per Carton	16 pcs	
Area Per Carton	38.64 sq ft	3.59 sq m
Weight Per Carton	28 lbs	12.7 kg



Recommended Installation Method

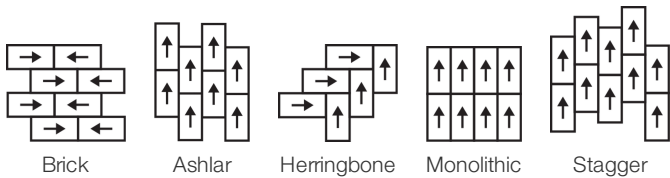

Coordinating Products

PVC-Free: In Tandem Sheet, In Tandem, Innate Sheet

Performance + Testing

Static Load (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
Residual Indentation (ASTM F1914)	Passes	
Resistance to Heat (ASTM F1514)	Passes	
Resistance to Light (ASTM F1515)	Passes	
Resistance to Chemicals (ASTM F925)	Passes	
Radiant Panel (ASTM E648)	Passes, Class I	Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.
coefficient of friction (ASTM D2407, slip resistance)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces	

Warranties

[15 Year Commercial Limited](#)
[Commercial 15 Year Underbed Bond Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing

Material Ingredient Transparency	Greenhealth Approved Yes Cradle to Cradle Certified™ Silver Level (Version 3.1) Health Product Declaration (HPD) 1000 ppm Disclosure Declare LBC Compliant
Indoor Air Quality	FloorScore® Certified

Climate Impact

Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with EN 15804, ISO 14025
Embodied Carbon (Cradle to Gate)	2.76 Kg Co ₂ /M ²
Life-Cycle Carbon Emissions	Carbon Neutral
Embodied Carbon (Cradle to Gate)	2.76 Kg Co ₂ /M ²
Life-Cycle Carbon Emissions	Carbon Neutral
Total Recycled Content	0% (Pre-Consumer 0% Post-Consumer 0%)

Global Product Assessment

CE Marking (EN 14041) | 3rd Party Certified
Country of Origin | Imported

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition	C2C Silver Level (Version 3.1)
X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt	C2C Silver Level (Version 3.1)
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt	C2C Silver Level (Version 3.1)
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt	C2C Silver Level (Version 3.1)
X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt	FloorScore® & Greenguard Gold Certificate
X13 Enhanced Material Precaution Part 1: Select Optimized Materials Optimization – max 2 pts	C2C Silver Level (Version 3.1)
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts	C2C Silver Level (Version 3.1)

Green Leed Contribution Credit

MR Credit: Building Product Disclosure and Optimization
Material Ingredients - Option 1: Material Ingredient Reporting

MR Credit: Building Product Disclosure and Optimization
Material Ingredients - Option 2: Material Ingredient Optimization

MR Credit: Building Product Disclosure and Optimization
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

MR Credit: Building Product Disclosure and Optimization
Sourcing of Raw Materials - Option 2: Leadership Extraction Practices

EQ Credit: Low Emitting Materials
Option 1: Product Category Calculations

Health Product Declaration (HPD) | 100 Ppm Disclosure

C2C Silver Level (Version 3.1)

3rd Party Certified in Accordance with EN 15804, ISO 14025

Bio-Based Materials - Meets Astm D6866 And ISO 16620-2

FloorScore® Certified

Additional Information

**Meets or exceeds all local and national regulations in country of manufacture.

[Installation Guidelines](#)

[Maintenance Guidelines](#)


Please visit www.shawcontract.com for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.


This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.


Available Colorways




Dove 95104
V1 - Uniform Appearance




Natural 95110
V1 - Uniform Appearance




Flax 95114
V1 - Uniform Appearance




Field 95330
V1 - Uniform Appearance




Mist 95405
V1 - Uniform Appearance




Shade 95410
V1 - Uniform Appearance




Concrete 95515
V1 - Uniform Appearance



Core 95595
V1 - Uniform Appearance




Umber 95715
V1 - Uniform Appearance




Mineral 95760
V1 - Uniform Appearance

Color and Visual Variation Index


Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1


Uniform Appearance

V2

Slight Variation

V3

Moderate Variation

V4

Substantial Variation

