ShawContract®

Low Embodied Carbon + Carbon Neutral

Innate

PVC-Free


Collection	**Innate + In Tandem**	
Style Number	**0895V**	
Construction	**Commercial Bio-Based Polyurethane Heterogeneous Tile**	
Class / ASTM F3404	**Meets**	
Finish	**ExoGuard+®**	
	U.S.	Metric
Nominal Dimensions	**13 in w x 26 in l**	**33 cm w x 67 cm l**
Actual Dimensions	**13.18 in w x 26.38 in l**	**33.48 cm w x 67.01 cm l**
Overall Thickness	**0.098 in**	**2.5 mm**
Edge Profile	**Squared Edge**	
Installation Type	**Dry Back**	
Installation	**Direct Glue**	
Recommended Adhesive	**4200 1 Gallon or 4200 4 Gallon**	



Packaging

Pieces per Carton	**16 pcs**	
Area per Carton	**38.64 ft²**	**3.59 m²**
Weight per Carton	**28 lbs**	**12.7 kg**
Area per Pallet	**2550.24 ft²**	**236.93 m²**
Boxes per Pallet	**66 boxes**	

Recommended Installation Method

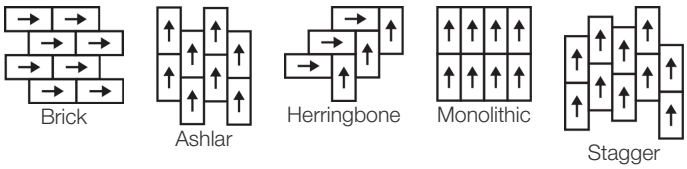

Coordinating Products

PVC-Free: In Tandem Sheet, In Tandem, Innate Sheet, Innate Linen Sheet, Innate Stria Tile

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302

© 2026 Shaw Industries Group, Inc., a Berkshire Hathaway Company

November 24, 2026

For reference purposes only if printed or downloaded.

Performance + Testing

Static Load (ASTM F970)	**Passes (Modified), *1500 lbs**
Residual Indentation (ASTM F1914)	**Passes**
Resistance to Heat (ASTM F1514)	**Passes**
Resistance to Light (ASTM F1515)	**Passes**
Resistance to Chemicals (ASTM F925)	**Passes**
Radiant Panel (ASTM E648)	**Passes, Class I**
Coefficient of Friction (ASTM D2047, Slip Resistance)	**≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces**

*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

15 Year Commercial Limited Warranty

Commercial Limited Underbed Bond Warranty

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing	
Material & Ingredient Transparency	Greenhealth Approved | Yes Cradle to Cradle Certified™ | Bronze Level (Version 4.1) Health Product Declaration (HPD) | 1000 ppm Disclosure Declare | LBC Compliant
Indoor Air Quality	FloorScore® | Certified Greenguard Gold | Certified
Climate Impact	
Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with EN 15804, ISO 14025
Embodied Carbon (Cradle to Gate)	2.76 Kg Co_2/M^2
Life-Cycle Carbon Emissions	Carbon Neutral
Total Recycled Content	0% (Pre-Consumer 0% | Post-Consumer 0%)
Global Product Assessment	GSA | Approved CE Marking (EN 14041) | 3rd Party Certified Country of Origin | Germany

© 2026 Shaw Industries Group, Inc., a Berkshire Hathaway Company

For reference purposes only if printed or downloaded.

Works With WELL | WELL V2 Contribution Credit

X01 Material Restrictions Restrict Asbestos	**C2C Bronze Level (Version 4.1)**
X05 Enhanced Material Restrictions Part 2: Select Compliant Architectural and Interior Products	**C2C Bronze Level (Version 4.1)**
X06 VOC Restrictions Part 2: Restrict VOC Emissions from Furniture, Architectural and Interior Products	**C2C Bronze Level (Version 4.1)**
X07 Materials Transparency Part 2: Select Products with Enhanced Ingredient Disclosure	**C2C Bronze Level (Version 4.1)**
X07 Materials Transparency Part 3: Select Products with Third-Party Verified Ingredients	**FloorScore & Greenguard Gold Certified**
X08 Materials Optimization Part 1: Select Materials with Enhanced Chemical Restrictions	**C2C Bronze Level (Version 4.1)**
X08 Materials Optimization Part 2: Select Optimized Products	**Health Product Declaration (HPD) | 1000 Ppm Disclosure**

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 1: Material Ingredient Reporting	**Health Product Declaration (HPD) | 1000 Ppm Disclosure**
MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 2: Material Ingredient Optimization	**C2C Bronze Level (Version 4.1)**
MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)	**3rd Party Certified in Accordance with EN 15804, ISO 14025**
MR Credit: Building Product Disclosure and Optimization Sourcing of Raw Materials - Option 2: Leadership Extraction Practices	**Bio-Based Materials - Meets Astm D6866 And ISO 16620-2**
EQ Credit: Low Emitting Materials Option 1: Product Category Calculations	**FloorScore & Greenguard Gold Certified**

Additional Information

**Meets or exceeds all local and national regulations in country of manufacture.

Installation Guidelines

Maintenance Guidelines

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.


Visit shawcontract.com/testing for more information.

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302


© 2026 Shaw Industries Group, Inc., a Berkshire Hathaway Company

For reference purposes only if printed or downloaded.

Available Colorways



Dove 95104
V1 - Uniform Appearance




Natural 95110
V1 - Uniform Appearance



Flax 95114
V1 - Uniform Appearance



Field 95330
V1 - Uniform Appearance



Mist 95405
V1 - Uniform Appearance



Shade 95410
V1 - Uniform Appearance



Concrete 95515
V1 - Uniform Appearance



Core 95595
V1 - Uniform Appearance



Umber 95715
V1 - Uniform Appearance



Mineral 95760
V1 - Uniform Appearance

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.



Uniform Appearance | Slight Variation | Moderate Variation | Substantial Variation

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302

© 2026 Shaw Industries Group, Inc., a Berkshire Hathaway Company

November 24, 2026

For reference purposes only if printed or downloaded.