

Innate


| | | |
|-------------------|------------------------------|-------------------------|
| コレクション | Innate + In Tandem | |
| スタイルナンバー | 0895V | |
| 建設 | 市販のバイオベースのポリウレタン異種タイル | |
| クラス | ASTM F06 (In Development) | |
| 仕上げ | ExoGuard+® | |
| | 米国 | メートル法 |
| 公称寸法 | 13 in w x 26 in l | 33 cm w x 67 cm l |
| 実際の寸法 | 13.18 in w x 26.38 in l | 33.48 cm w x 67.01 cm l |
| 製品全体の厚さ | 0.098 in | 2.5 mm |
| エッジプロファイル | スクエア エッジ | |
| Installation Type | Dry Back | |
| インストール | Direct Glue | |
| 推奨接着剤 | 4200 Resilient Tile 4 Gallon | |

包装

| | | |
|------------|-------------|-----------|
| ボックスあたりの個数 | 16 pcs | |
| ボックスあたりの面積 | 38.64 sq ft | 3.59 sq m |
| ボックスあたりの重量 | 28 lbs | 12.7 kg |



推奨インストール方法

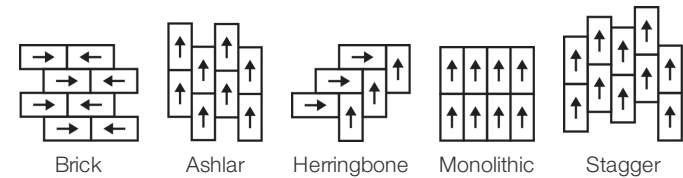

コーディネート商品

None: In Tandem Sheet, In Tandem

パフォーマンス + テスト

| | |
|-----------------------|---|
| 残留圧痕 (astm F1914) | Passes |
| 耐熱性 (astm F1514) | Passes |
| 耐光性 (astm F1515) | Passes |
| 耐薬品性 (astm F925) | Passes |
| 摩擦係数(astm D2407、滑り抵抗) | ≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

保証

15年の商用限定保証
Commercial 15 Year Underbed Bond Warranty

Diversity, Equity & Inclusion

We believe all humans are equal. Individually and collectively, we need to proactively create and promote opportunities that give everybody an equal footing in life. We nurture an environment where every voice and perspective can be heard, and proactively promote accessibility and inclusivity inside our network and beyond. One proof point is our ability to meet the criteria of the Social Fairness pillar of the Cradle to Cradle Product Standard. At Shaw Industries, we promote supplier participation that is reflective of Shaw's diverse customer base and local community. More than 42% of our spend***** is with small and diverse businesses. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and openingnew markets for growth.

属性+認定

Health & Wellbeing

Material Ingredient Transparency

Cradle to Cradle Certified™ | シルバーレベル (バージョン 3.1)
Health Product Declaration (HPD) | 1000 ppm Disclosure
Declare | LBC 準拠

Climate Impact

Environmental Product Declaration (EPD)
Embodied Carbon (Cradle to Gate)
Life-Cycle Carbon Emissions
Total Recycled Content

EN 15804 および ISO 14025 に基づく 第三者認証取得
4.31 Kg Co₂/M²
Carbon Neutral
0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

FloorScore® | 認証取得
CE Marking (EN 14041) | 第三者認証取得
Greenguard (Certification, Gold, Private Label) | 認証取得
Country of Origin | Imported

グリーンリード貢献クレジット

MRクレジット：製品の開示と最適化の構築
材料成分-オプション1：材料成分レポート
MRクレジット：製品の開示と最適化の構築
材料成分-オプション2：材料成分の最適化
MRクレジット：製品の開示と最適化の構築
環境製品宣言-オプション1：環境製品宣言 (EPD)
MR Credit: Building Product Disclosure and Optimization
Sourcing of Raw Materials - Option 2: Leadership Extraction Practices
EQクレジット：低排出材料
オプション1：製品カテゴリの計算

Health Product Declaration (HPD) | 100 Ppm Disclosure

C2C Silver Level (Version 3.1)

3rd Party Certified in Accordance with EN 15804, ISO 14025
Bio-Based Materials - Meets Astm D6866 And ISO 16620-2
FloorScore & Greenguard Gold Certified

追加情報

**Meets or exceeds all local and national regulations in country of manufacture.

[Installation Guidelines](#)


Maintenance Guidelines

Please visit www.shawcontract.com for the most current warranty information.
Specifications are subject to nominal manufacturing variance. Material supply
and/or manufacturing processes may necessitate changes without notice.


This product is an exclusive design and may not be duplicated in any manner. Use of
this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.


Available Colorways




Dove 95104
V1 - Uniform Appearance




Natural 95110
V1 - Uniform Appearance




Flax 95114
V1 - Uniform Appearance




Field 95330
V1 - Uniform Appearance




Mist 95405
V1 - Uniform Appearance




Shade 95410
V1 - Uniform Appearance




Concrete 95515
V1 - Uniform Appearance



Core 95595
V1 - Uniform Appearance



Umber 95715
V1 - Uniform Appearance



Mineral 95760
V1 - Uniform Appearance

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1



Uniform Appearance

V2



Slight Variation

V3



Moderate Variation

V4



Substantial Variation