


In Tandem Sheet


Collection	Innate + In Tandem	
Style Number	0897V	
Welding Rod Style Number	270VS	
Construction	Comm Bio-Based Polyurethane Het Sheet W/Fibreglass	
Class / ASTM F1303	ASTM F06 (In Development)	
Finish	ExoGuard+®	
	U.s.	Metric
Overall Thickness	0.098 in	2.5 mm
Installation Type	Dry Back	
Installation	Direct Glue	
Recommended Adhesive	4200 Resilient Sheet 4 Gallon or 4151 Multi-Use Premium 4 Gallon	

Packaging

Actual Roll Size	6.59 ft w x 65.62 ft l	2.01 m w x 20.00 m l
Area Per Roll	48.08 sq/roll	40.2 sq m/roll
Weight Per Roll	321.88 lbs	146 kg

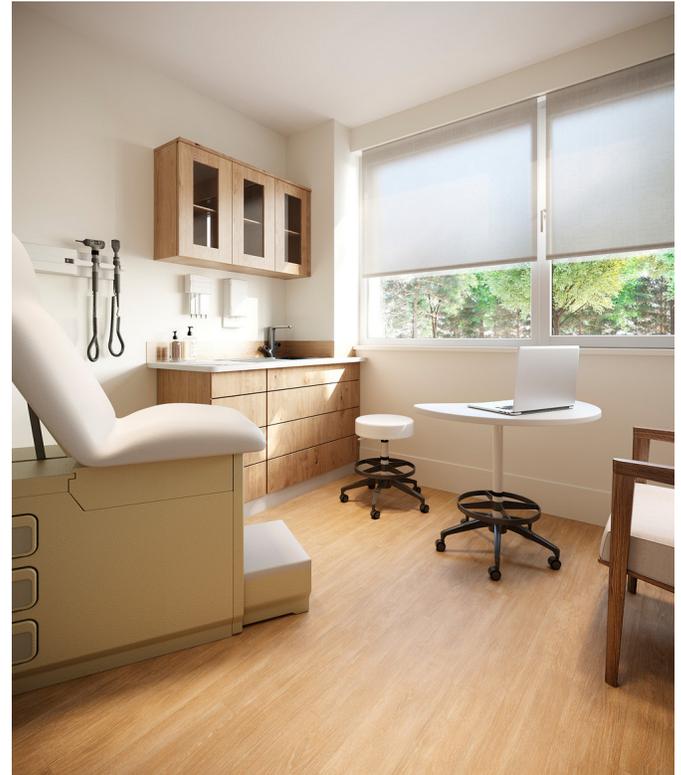

Recommended Installation Method



Non Reverse

Coordinating Products

PVC-Free: Innate, In Tandem

Performance + Testing

Static Load (Astm F970)	Passes (Modified), *1500 lbs	*This Test Is Intended To Compare Relative Properties Of Different Styles And Constructions. Results Are Based On A Laboratory Test And Used For Comparative Purposes - Real Life Load Limit May Vary.
Residual Indentation (Astm F1914)	Passes	
Flexibility (Astm F137)	Passes	
Resistance To Heat (Astm F1514)	Passes	
Resistance To Light (Astm F1515)	Passes	
Resistance To Chemicals (Astm F925)	Passes	
Radiant Panel (Astm E648)	Passes, Class I	
Coefficient Of Friction (Astm D2407, Slip Resistance)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

15 Year Commercial Limited

[Commercial 15 Year Underbed Bond Warranty](#)

Material Health & Environmental Certifications

Health & Wellbeing

Material Ingredient Transparency

Cradle to Cradle Certified™ | Silver Level (Version 3.1)
Health Product Declaration (HPD) | 1000 ppm Disclosure
Declare | LBC Compliant

Indoor Air Quality

FloorScore® | Certified

Climate Impact

Environmental Product Declaration (EPD)

3rd Party Certified in Accordance with EN 15804, ISO 14025

Embodied Carbon (Cradle to Gate)

4.31 Kg Co₂/M²

Life-Cycle Carbon Emissions

Carbon Neutral

Total Recycled Content

0% (Pre-Consumer 0% | Post-Consumer 0%)

Global Product Assessment

CE Marking (EN 14041) | 3rd Party Certified

Country of Origin | Imported

Green Leed Contribution Credit

MR Credit: Building Product Disclosure and Optimization
Material Ingredients - Option 1: Material Ingredient Reporting

Health Product Declaration (HPD) | 100 Ppm Disclosure

MR Credit: Building Product Disclosure and Optimization
Material Ingredients - Option 2: Material Ingredient Optimization

C2C V3.1 Silver Certification

MR Credit: Building Product Disclosure and Optimization
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

3rd Party Certified in Accordance with EN 15804, ISO 14025

MR Credit: Building Product Disclosure and Optimization
Sourcing of Raw Materials - Option 2: Leadership Extraction Practices

Bio-Based Materials - Meets Astm D6866 And ISO 16620-2

EQ Credit: Low Emitting Materials
Option 1: Product Category Calculations

FloorScore Certified

[Installation Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways



Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

