

Inspire


Collection	Mindful Play	
Style Number	0884V	
Construction	Heavy Commercial Luxury Vinyl Tile	
Class / ASTM F1700	Class III, Type B	
Finish	ExoGuard+®	
	U.S.	Metric
Nominal Dimensions	12 in w x 24 in l	30 cm w x 61 cm l
Actual Dimensions	12.00 in w x 24.00 in l	30.48 cm w x 60.96 cm l
Wear Layer Thickness	20 mil (0.02 in)	0.51 mm
Overall Thickness	0.098 in	2.5 mm
Edge Profile	Squared Edge	
Installation Type	Dry Back	
Installation	Direct Glue	
Recommended Adhesive	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

Packaging

Pieces per Carton	18 pcs	
Area per Carton	36 sq ft	3.34 sq m
Weight per Carton	32.4 lbs	14.7 kg



Recommended Installation Method

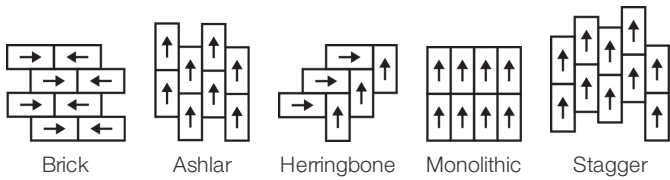

Coordinating Products

LVT: Inspire 5.0 Mm  
Carpet Tile: Think Tile, Engage Tile, Impact Tile

Performance + Testing

Static Load (ASTM F970)	Passes (Modified), *2000 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
Residual Indentation (ASTM F1914)	Passes	
Resistance to Heat (ASTM F1514)	Passes	
Resistance to Light (ASTM F1515)	Passes	
Resistance to Chemicals (ASTM F925)	Passes	
Radiant Panel (ASTM E648)	Passes, Class I	
Coefficient of Friction (ASTM D2047, Slip Resistance)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces	
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.		

Warranties

- 15 Year Commercial Limited Warranty
- Commercial 15 Year Underbed Bond Warranty

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Health & Wellbeing	
Material Ingredient Transparency	Health Product Declaration (HPD)   1000 ppm Disclosure
Indoor Air Quality	FloorScore®   Certified
Climate Impact	
Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
Embodied Carbon (Cradle to Gate)	9.59 Kg CO <sub>2</sub> /M <sup>2</sup>
Total Recycled Content	30% (Pre-Consumer 30%   Post-Consumer 0%)
Global Product Assessment	Re[turn] Reclamation Program*   Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost to The Customer.
	CE Marking (EN 14041)   3rd Party Certified
	Country of Origin   United States

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions  
Part 1: (C): Restrict Asbestos Precondition

X08 Hazardous Material Reduction  
Part 1: Limit Hazardous Materials Optimization

X10 Volatile Compound Reduction  
Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization

X10 Volatile Compound Reduction  
Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization

X11 Long Term Emissions Control  
Part 2: Flooring Optimization

**Absence of Asbestos**

**Absence of Heavy Metals**

**Absence of Halogenated Flame Retardants**

**Ortho-Phthalates**

**FloorScore Certificate**

## Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 1: Material Ingredient Reporting

MR Credit: Building Product Disclosure and Optimization  
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

EQ Credit: Low Emitting Materials  
Option 1: Product Category Calculations

**Health Product Declaration (HPD) | 100 Ppm Disclosure**

**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**

**FloorScore Certified**

## Additional Information

\* To learn more about the recyclability of our products and our Environmental Guarantee, please visit [shawcontract.com/sustainability](http://shawcontract.com/sustainability).

[Installation Guidelines](#)

[Maintenance Guidelines](#)


Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways



Clarity 84111  
LRV 25.2 | L\* 57.27  
V4 - Substantial Variation




Lime 84325  
LRV 34.9 | L\* 65.68  
V4 - Substantial Variation




Teal 84405  
LRV 9.1 | L\* 36.14  
V4 - Substantial Variation




Blue 84429  
LRV 8.1 | L\* 34.22  
V4 - Substantial Variation




Escape 84505  
LRV 6.9 | L\* 31.63



Nuance 84515  
LRV 24.4 | L\* 56.52  
V4 - Substantial Variation



Encourage 84535  
LRV 24.2 | L\* 56.33  
V4 - Substantial Variation



Transform 84585  
LRV 13.6 | L\* 43.68



Experience 84595  
LRV 11 | L\* 39.6



Orange 84668  
LRV 14.3 | L\* 44.65  
V4 - Substantial Variation



Achieve 84760  
LRV 9.9 | L\* 37.71  
V4 - Substantial Variation



Purple 84965  
LRV 6.9 | L\* 31.61  
V4 - Substantial Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

