

Inspire


Colección	Mindful Play	
Número De Estilo	0884V	
Construcción	Heavy Commercial Luxury Vinyl Tile	
clase	Class III, Type B	
Terminación	ExoGuard+®	
	U.s.	Metric
Dimensiones Nominales	12 in w x 24 in l	30 cm w x 61 cm l
Dimensiones Reales	12.00 in w x 24.00 in l	30.48 cm w x 60.96 cm l
Desgaste De La Capa De Uso	20 mil (0.02 in)	0.51 mm
Espesor Total Del Producto	0.098 in	2.5 mm
Perfil De Borde	Borde Cuadrado	
Installation Type	Dry Back	
Instalación	Direct Glue	
Adhesivo Recomendado	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	



Embalaje

Piezas Por Caja	18 pcs	
Área Por Caja	36 sq ft	3.34 sq m
Peso Por Caja	32.4 lbs	14.7 kg

Método De Instalación Recomendado

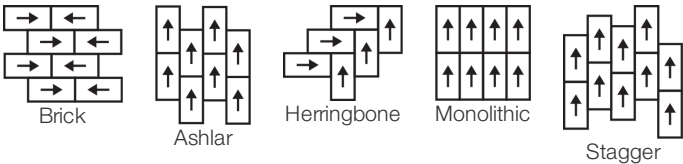

Productos Que Combinan

LVT: Inspire 5.0 Mm
Carpet Tile: Think Tile, Engage Tile, Impact Tile

desempeño + pruebas

margen adicional residual (ASTM F1914)	Passes
resistencia al calor (ASTM F1514)	Passes
resistencia a la luz (ASTM F1515)	Passes
resistencia a productos químicos (ASTM F925)	Passes
panel radiante (ASTM E648)	Passes, Class I
coeficiente de fricción (ASTM D2407, resistencia al deslizamiento)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garantías

[15 Años Limitado A Uso Comercial](#)[Commercial 15 Year Underbed Bond Warranty](#)

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Atributos + Certificaciones

Health & Wellbeing

Material Ingredient Transparency

Indoor Air Quality

[Health Product Declaration \(HPD\) | 1000 ppm Disclosure](#)[FloorScore® | Certificado](#)

Climate Impact

Environmental Product Declaration (EPD)

Embodied Carbon (Cradle to Gate)

Total Recycled Content

[Certificado Tercerizado De Acuerdo Con La Norma ISO 14025, EN 15804, & ISO 21930:2017](#)9.59 Kg CO₂/M²

30% (Pre-Consumer 30% | Post-Consumer 0%)

Global Product Assessment

[Re\[turn\] Reclamation Program* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost To The Customer.](#)

CE Marking (EN 14041) | Certificado Tercerizado

Country of Origin | United States

WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition

X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt

X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt

Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt

X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

Absence of Asbestos**Absence of Heavy Metals****Absence of Halogenated Flame Retardants****Ortho-Phthalates****FloorScore® Certificate**

Contribución Para Créditos Leed

Crédito MR: Divulgación y optimización de productos de construcción
Ingredientes de materiales - Opción 1: Informe de ingredientes de los materiales

Crédito MR: Divulgación y optimización de productos de construcción
Declaraciones ambientales de productos - Opción 1: Declaración ambiental de productos (EPD)

Crédito EQ: Materiales de baja emisión

Opción 1: Cálculos de categoría de producto

Health Product Declaration (HPD) | 100 Ppm Disclosure**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017****FloorScore® Certified**

Información Adicional

* To learn more about the recyclability of our products and our Environmental Guarantee, please visit shawcontract.com/sustainability.


[Installation Guidelines](#)[Maintenance Guidelines](#)Please visit www.shawcontract.com for the most current warranty information.

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Available Colorways



Clarity 84111
LRV 25.2 | L* 57.27
V4 - Substantial Variation




Lime 84325
LRV 34.9 | L* 65.68
V4 - Substantial Variation




Teal 84405
LRV 9.1 | L* 36.14
V4 - Substantial Variation




Blue 84429
LRV 8.1 | L* 34.22
V4 - Substantial Variation




Escape 84505
LRV 6.9 | L* 31.63



Nuance 84515
LRV 24.4 | L* 56.52
V4 - Substantial Variation



Encourage 84535
LRV 24.2 | L* 56.33
V4 - Substantial Variation



Transform 84585
LRV 13.6 | L* 43.68



Experience 84595
LRV 11 | L* 39.6



Orange 84668
LRV 14.3 | L* 44.65
V4 - Substantial Variation



Achieve 84760
LRV 9.9 | L* 37.71
V4 - Substantial Variation



Purple 84965
LRV 6.9 | L* 31.61
V4 - Substantial Variation

Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1



Uniform Appearance

V2



Slight Variation

V3



Moderate Variation

V4



Substantial Variation

