


Inspire

Colección	Mindful Play	
Número De Estilo	0884V	
Construcción	Heavy Commercial Luxury Vinyl Tile	
clase	Class III, Type B	
Terminación	ExoGuard+®	
	U.s.	Metric
Dimensiones Nominales	12 in w x 24 in l	30 cm w x 61 cm l
Dimensiones Reales	12.00 in w x 24.00 in l	30.48 cm w x 60.96 cm l
Desgaste De La Capa De Uso	20 mil (0.02 in)	0.51 mm
Espesor Total Del Producto	0.098 in	2.5 mm
Perfil De Borde	Borde Cuadrado	
Installation Type	Dry Back	
Instalación	Direct Glue	
Adhesivo Recomendado	S150-95 Resilient Tile Spray, , 4200 Resilient Tile 4 Gallon, 2200 Semi-Wet Resilient 4 Gallon Pail, 2200 Semi-Wet Resilient 1 Gallon Pail, or 4151 Multi-Use Premium 4 Gallon	

Embalaje

Piezas Por Caja	18 pcs	
Área Por Caja	36 sq ft	3.34 sq m
Peso Por Caja	32.4 lbs	14.7 kg

Método De Instalación Recomendado

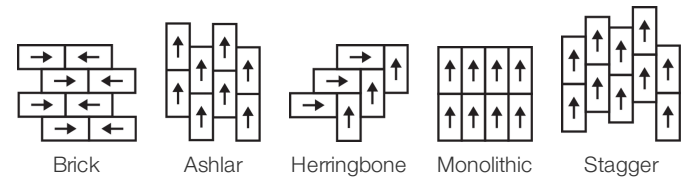

Productos Que Combinan

LVT: Inspire 5.0 Mm  
Carpet Tile: Think Tile, Engage Tile, Impact Tile

desempeño + pruebas

margen adicional residual (ASTM F1914)	Passes
resistencia al calor (ASTM F1514)	Passes
resistencia a la luz (ASTM F1515)	Passes
resistencia a productos químicos (ASTM F925)	Passes
panel radiante (ASTM E648)	Passes, Class I
coeficiente de fricción (ASTM D2407, resistencia al deslizamiento)	≥0.5, meets the recommended static coefficient of friction for ADA walking surfaces

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Garantías

[Commercial 15 Year Underbed Bond Warranty](#)  
[15 Años Limitado A Uso Comercial](#)

## Diversity &amp; Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

## Atributos + Certificaciones

## Health &amp; Wellbeing

Material Ingredient Transparency  
 Indoor Air Quality

Health Product Declaration (HPD) | 1000 ppm Disclosure  
 FloorScore® | Certificado

## Climate Impact

Environmental Product Declaration (EPD)  
 Embodied Carbon (Cradle to Gate)  
 Total Recycled Content

Certificado Tercerizado De Acuerdo Con La Norma ISO 14025, EN 15804, & ISO 21930:2017  
 9.59 Kg CO<sub>2</sub>/M<sup>2</sup>  
 30% (Pre-Consumer 30% | Post-Consumer 0%)

## Global Product Assessment

Re[turn] Reclamation Program\* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Shaw Manufactured Resilient Within The United States And Canada At No Cost to The Customer.  
 CE Marking (EN 14041) | Certificado Tercerizado  
 Country of Origin | United States

## WELL V2 Contribution Credit

X01 Fundamental Material Precautions Part 1: (C): Restrict Asbestos Precondition  
 X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt  
 X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt  
 Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization – 1 pt  
 X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt

**Absence of Asbestos**  
**Absence of Heavy Metals**  
**Absence of Halogenated Flame Retardants**  
  
**Ortho-Phthalates**  
**FloorScore Certificate**

## Contribución Para Créditos Leed

Crédito MR: Divulgación y optimización de productos de construcción  
 Ingredientes de materiales - Opción 1: Informe de ingredientes de los materiales  
 Crédito MR: Divulgación y optimización de productos de construcción  
 Declaraciones ambientales de productos - Opción 1: Declaración ambiental de productos (EPD)  
 Crédito EQ: Materiales de baja emisión  
 Opción 1: Cálculos de categoría de producto

**Health Product Declaration (HPD) | 100 Ppm Disclosure**  
  
**3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017**  
  
**FloorScore® Certified**

## Información Adicional

\* To learn more about the recyclability of our products and our Environmental Guarantee, please visit [shawcontract.com/sustainability](http://shawcontract.com/sustainability).

[Installation Guidelines](#)













[Maintenance Guidelines](#)

Please visit [www.shawcontract.com](http://www.shawcontract.com) for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.





Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.

## Available Colorways

					
Clarity 84111 LRV 25.2   L* 57.27 V4 - Substantial Variation	Lime 84325 LRV 34.9   L* 65.68 V4 - Substantial Variation	Teal 84405 LRV 9.1   L* 36.14 V4 - Substantial Variation	Blue 84429 LRV 8.1   L* 34.22 V4 - Substantial Variation	Escape 84505 LRV 6.9   L* 31.63	Nuance 84515 LRV 24.4   L* 56.52 V4 - Substantial Variation
					
Encourage 84535 LRV 24.2   L* 56.33 V4 - Substantial Variation	Transform 84585 LRV 13.6   L* 43.68	Experience 84595 LRV 11   L* 39.6	Orange 84668 LRV 14.3   L* 44.65 V4 - Substantial Variation	Achieve 84760 LRV 9.9   L* 37.71 V4 - Substantial Variation	Purple 84965 LRV 6.9   L* 31.61 V4 - Substantial Variation

### Color and Visual Variation Index

Shade and texture variation is inherent in all resilient products and can vary significantly from piece to piece. Samples should be used to assess color.

V1		V2		V3		V4	
	Uniform Appearance		Slight Variation		Moderate Variation		Substantial Variation

