


Uncover Tile

|                       |   |
|-----------------------|---|
| Product Type          | Carpet Tile   |
| Collection            | Vertical Layers   |
| Style Number          | 5T150   |
| Construction          | Multi-Level Pattern Cut/Loop  |
| Fiber                 | Ecosolution Q100® Nylon   |
| Dye Method            | 99% Solution Dyed / 1% Yarn Dyed  |
| Primary Backing       | Synthetic   |
| Secondary Backing     | Ecworx® Tile  |
| Protective Treatments | SSP® Shaw Soil Protection   |
| Recommended Adhesive  | 5000 Carpet Tile 4 Gallon, 3000 Carpet Tile 4 Gallon, 3000 Carpet Tile 1 Gallon, 4151 Multi-Use Carpet Tile 4 Gallon, 5000 Carpet Tile 1 Gallon, LokWorx Adhesive Tabs, 3800 Indoor Outdoor Carpet Tile 4 Gallon or LokDots |

|                         |              |                |
|-------------------------|--------------|----------------|
|                         | u.s.         | metric         |
| Product Size            | 9 in x 36 in | 23 cm x 91 cm  |
| Area per Carton         | 45 ft²       | 4.18 m²        |
| Pieces per Carton       | 20 pcs       |                |
| Gauge                   | 1/12 in      | 47.2 per 10 cm |
| Stitches                | 8.5 per in   | 34.5 per 10 cm |
| Finished Pile Thickness | 0.129 in     | 3.28 mm        |
| Average Density         | 6698 oz/yd³  | 0.248 g/cm³    |
| Kilotex                 |              | 11.67          |
| Total Thickness         | 0.293 in     | 7.44 mm        |
| Tufted Weight           | 24 oz/yd²    | 813.7 g/m²     |



Recommended Installation Method

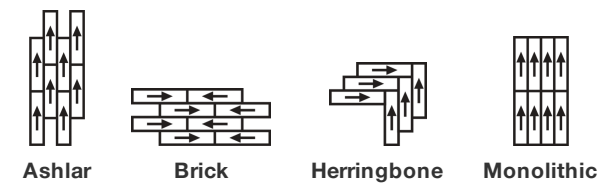

Performance + Testing

|                            |  |
|----------------------------|--|
| Radiant Panel              | Class I  |
| NBS Smoke                  | Less Than 450  |
| Electrostatic Propensity   | Less Than 3.5 kv   |
| CRI Green Label Plus (GLP) | GLP5563  |
| Pill Test                  | Pass*  |
| ADA Compliance             | >0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes*** |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

Lifetime Commercial Limited Warranty

Coordinating Products

LVT: **Unveil**  
Carpet Tile: **Expose Tile, Relief Tile, Tinge Tile, Undertone Tile**

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Certifications below apply exclusively to the carpet tile rug itself and not the LokWorx Tabs adhesive

Health & Wellbeing

Material Ingredient Transparency

**Cradle to Cradle Certified® | Silver Level (Version 4.0)**  
**Health Product Declaration (HPD) | 1,000 ppm Disclosure**  
**Living Building Challenge (LBC) | Free of Red List Chemicals**  
**Declare | LBC Compliant**  
**NSF 140 | Gold**  
**CRI Green Label Plus (GLP) | GLP5563**

Indoor Air Quality

Climate Impact

Environmental Product Declaration (EPD)  
Embodied Carbon (Cradle to Gate)  
Life-Cycle Carbon Emissions  
Total Recycled Content  
Product Packaging

**3rd Party Certified in Accordance with ISO14044, ISO14025 & EN15804**  
**3.83 kg CO<sub>2</sub>/m<sup>2</sup>**  
**Carbon Neutral**  
**59% (Pre-Consumer 59% | Post-Consumer 0%)**  
**100% Recyclable**

Global Product Assessment

**Singapore Green Label | Certified**  
**CE Marking (EN 14041) | 3rd Party Certified**  
**Environmental Guarantee\* | Re[turn] Reclamation Program\* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Ecoworx Carpet.**  
**Country of Origin\*\* | USA**

WELL V2 Contribution Credit

X08 Hazardous Material Reduction  
Part 1: Limit Hazardous Materials Optimization  
X10 Volatile Compound Reduction  
Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization  
X11 Long Term Emissions Control  
Part 2: Flooring Optimization  
X13 Enhanced Material Precaution  
Part 1: Select Optimized Materials Optimization  
X14 Material Transparency  
Part 1: Promote Ingredient Disclosure Optimization

**C2C Silver Level (Version 4.0)**  
**C2C Silver Level (Version 4.0)**  
**Green Label Plus Certification: GLP5563**  
**C2C Silver Level (Version 4.0)**  
**C2C Silver Level (Version 4.0)**

## Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization  
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 1: Material Ingredient Reporting

MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 2: Material Ingredient Optimization

MR Credit: Building Product Disclosure and Optimization  
Sourcing of Raw Materials - Option 2: Leadership Extraction Practices

EQ Credit: Low Emitting Materials  
Option 1: Product Category Calculations

MR Credit: Interiors Life-Cycle Impact Reduction  
Option 3: Design for Flexibility

**3rd Party Certified in Accordance with ISO 14044, ISO 14025 & EN15804**

**HPD (Version 2.1) or C2C Silver Level (Version 4.0)**

**C2C Silver Level (Version 4.0)**

**Environmental Guarantee: Re[turn] Reclamation Program\* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Ecoworx Carpet.**


**Green Label Plus Certification: GLP5563**

**Ecworx Tile with Lokdots Installation System**


## Available Colorways




Birch 50111  
LRV 19.1 | L\* 50.81




Weathered Birch 50112  
LRV 19.8 | L\* 51.64




Concrete 50481  
LRV 6.1 | L\* 30.83




Industrial Conc 50482  
LRV 7.7 | L\* 33.25




Iron 50505  
LRV 2.9 | L\* 19.53




Oxidized Iron 50506  
LRV 5.3 | L\* 27.61




Pewter 50515  
LRV 18.3 | L\* 49.92



Burnished Pewte 50516  
LRV 15.6 | L\* 46.48



Steel 50535  
LRV 17.2 | L\* 48.79



Patina Steel 50536  
LRV 14.5 | L\* 44.9



Alum 50760  
LRV 14.5 | L\* 44.99



Tarnished Alum 50761  
LRV 15.5 | L\* 46.36

## Additional Information

\* To learn more about the recyclability of our products and our re[TURN], please visit [shawcontract.com/sustainability](https://shawcontract.com/sustainability).

\*\*Meets or exceeds all local and national regulations in country of manufacture.

\*\*\*This carpet is manufactured to be ADA compliant, but to be fully ADA compliant, the end-user must ensure the carpet is adhered to the floor and installed as outlined in the ADA standards.

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](https://shawcontract.com/testing) for more information.

