


Dye Lab Tile

Nom De Style	Carreaux De Tapis
Collection	Dye Lab
Numéro De Style	5T041
Construction	Pile Coupée
Fibre	Ecosolution Q100™ Nylon
Endos Primaire	Synthétique
Endos Secondaire	Ecworx® Tile
Traitements Protecteur	Protection Des Sols SSP® Shaw
Adhésif Recommandé	LokDots, 3000 Carpet Tile 1 Gallon, 4151 Multi-Use Carpet Tile 4 Gallon, 5000 Carpet Tile 1 Gallon, LokWorx Adhesive Tabs, 3800 Indoor Outdoor Carpet Tile 4 Gallon, 5000 Carpet Tile 4 Gallon or 3000 Carpet Tile 4 Gallon

	u.s.	metric
Dimensions Du Produit	24 in x 24 in	61 cm x 61 cm
Surface Par Carton	48 ft²	4.46 m²
Pièces Par Carton	12 pcs	
Jauge	1/10 in	39.4 per 10 cm
Compte De Mailles	10.5 per in	42.5 per 10 cm
Épaisseur Fini	0.175 in	4.45 mm
Densité	7406 oz/yd³	0.274 g/cm³
Kilotex		10.11
Poids De La Fibre Touffetée	0.330 in	8.38 mm
Poids De La Fibre Touffetée	36 oz/yd²	1220.6 g/m²



Méthodes d'Installation Conseillées

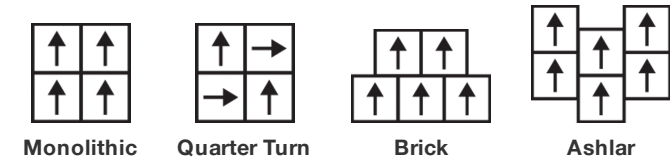

Spécifications Du Rendement + Tests Et Essai

Essai Au Panneau Radiant (Astm E648)	Class I
Densité Du Fumée	Less Than 450
Statique	Less Than 3.5 kv
Label Cri Green Label Plus (Glp)	GLP5563
Inflammabilité	Pass*
Ada Conformité	≥0.6, conforme au coefficient de frottement statique pour les surfaces de passage et d'accessibilité simplifiée (ADA).***

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Garanties

Commerciale Limitée

Attributs + Certifications

Certifications Below Apply Exclusively To The Carpet Tile Rug Itself And Not The Lokworx Tabs Adhesive

Health & Wellbeing

Material Ingredient Transparency	Cradle to Cradle Certified® Silver Level (Version 4.0) Health Product Declaration (HPD) Divulcation De 1 000 ppm Living Building Challenge (LBC) Exempt De Produits Chimiques De La Liste Rouge Declare Conforme LBC NSF 140 or CRI Green Label Plus (GLP) GLP5563
Indoor Air Quality	

Climate Impact

Environmental Product Declaration (EPD)	Certifié Par Une Tierce Partie Conformément Aux Normes ISO 14044, ISO 14025 Et EN 15804
Embodied Carbon (Cradle to Gate)	4.07 kg CO₂/m²
Life-Cycle Carbon Emissions	Low Embodied Carbon
Total Recycled Content	64% (Pre-Consumer 64% Post-Consumer 0%)
Product Packaging	100% Recyclable


Global Product Assessment

Singapore Green Label | Agréé
CE Marking (EN 14041) | Certifié Par Un Tiers
Environmental Guarantee* | Re[turn] Reclamation Program* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Ecoworx Carpet.
Country of Origin | Imported**


Contribution Au Certificat Vert Leed

« Crédit MR : Divulcation et optimisation des produits de construction	3rd Party Certified in Accordance with ISO14044, ISO14025 & EN15804
« Crédit MR : Divulcation et optimisation des produits de construction	HPD (Version 2.1) or C2C Silver Level (Version 4.0)
« Crédit MR : Divulcation et optimisation des produits de construction	C2C Silver Level (Version 4.0)
MR Credit: Building Product Disclosure and Optimization	Environmental Guarantee: Re[turn] Reclamation Program* Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Ecoworx Carpet.
Sourcing of Raw Materials - Option 2: Leadership Extraction Practices	Green Label Plus Certification: GLP5563
Crédit EQ : matériaux faibles émissions	Ecoworx Tile with Lokdots Installation System
MR Credit: Interiors Life-Cycle Impact Reduction	
Option 3: Design for Flexibility	

Available Colorways




Osage Orange 41202
LRV 17.2 (range 12.4 - 21.5) | L* 48.19 (range 41.91 - 53.48)




Fustic Wood 41316
LRV 3 (range 2.8 - 3.2) | L* 20.05 (range 19.23 - 20.89)




Fustic Saxon 41396
LRV 8.8 (range 6.6 - 10.4) | L* 35.41 (range 30.89 - 38.56)




Black Walnut 41402
LRV 12.7 (range 11.6 - 14.6) | L* 42.16 (range 40.6 - 45.04)




Saxon 41462
LRV 5.7 (range 3.8 - 7.6) | L* 28.32 (range 23.11 - 33.17)




Cornflower 41480
LRV 4.8 (range 3.1 - 6.3) | L* 25.8 (range 20.36 - 30.10)



Knotweed 41491
LRV 12.0 (range 10.6 - 12.8) | L* 41.2 (range 38.9 - 42.43)



Indigo 41496
LRV 2.9 (range 2.1 - 3.7) | L* 19.6 (range 16.14 - 22.66)



Woad 41497
LRV 4.0 (range 2.6 - 5.5) | L* 23.4 (range 18.20 - 27.99)



Sumac 41504
LRV 9.2 (range 6.4 - 11.8) | L* 36.1 (range 30.43 - 40.92)




Logwood 41505
LRV 3.1 (range 2.2 - 4.3) | L* 20.4 (range 16.71 - 24.62)




Black Tea 41516
LRV 10.1 (range 8.8 - 11.9) | L* 38.0 (range 35.55 - 41.09)




Henna 41535
LRV 12.6 (range 10.7 - 13.8) | L* 42.09 (range 39 - 43.97)




Iron 41580
LRV 6.8 (range 4.7 - 8.4) | L* 31.12 (range 25.83 - 34.8)




Sandalwood 41665
LRV 13.2 (range 11.7 - 15) | L* 42.99 (range 40.77 - 45.57)




Lac 41762
LRV 3.5 (range 2.8 - 4.2) | L* 21.9 (range 19.27 - 24.34)




Brazil Wood 41855
LRV 2.8 (range 2.1 - 3.3) | L* 19.24 (range 16.02 - 21.26)




Madder Root 41864
LRV 7.7 (range 5.1 - 9.3) | L* 32.84 (range 26.92 - 36.47)



Cochineal 41880
LRV 4.9 (range 3.3 - 6.6) | L* 26.01 (range 21.03 - 30.80)



Beet 41890
LRV 5.3 (range 4.8 - 6) | L* 27.43 (range 26.18 - 29.45)



Iris 41965
LRV 3.8 (range 2.7 - 4.8) | L* 22.71 (range 18.91 - 26.17)

Informations Supplémentaires

* To learn more about the recyclability of our products and our re[TURN], please visit shawcontract.com/sustainability.

**Meets or exceeds all local and national regulations in country of manufacture.

***This carpet is manufactured to be ADA compliant, but to be fully ADA compliant, the end-user must ensure the carpet is adhered to the floor and installed as outlined in the ADA standards.

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.



PVC-Free

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302