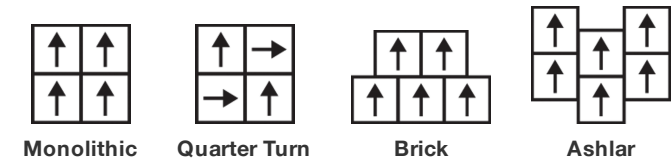


Dye Lab Tile

Tipo De Producto	Carpet Tile	
Colección	Dye Lab	
Número De Estilo	5T041	
Construcción	Fibra Cortada	
Fibra	Ecosolution Q100™ Nylon	
Base Primaria	Sintético	
Base Secundaria	Base Ecoworx®	
Tratamientos Protectores	SSP® Shaw Protección Para El Piso	
Adhesivo Recomendado	LokDots, 3000 Carpet Tile 1 Gallon, 4151 Multi-Use Carpet Tile 4 Gallon, 5000 Carpet Tile 1 Gallon, LokWorx Adhesive Tabs, 3800 Indoor Outdoor Carpet Tile 4 Gallon, 5000 Carpet Tile 4 Gallon or 3000 Carpet Tile 4 Gallon	
	u.s.	metric
Tamaño Del Producto	24 in x 24 in	61 cm x 61 cm
Área Por Caja	48 ft²	4.46 m²
Piezas Por Caja	12 pcs	
Gauge	1/10 in	39.4 per 10 cm
Puntadas	10.5 per in	42.5 per 10 cm
Densidad Media	7406 oz/yd³	0.274 g/cm³
Kilotex		10.11
Espesor Total	0.330 in	8.38 mm
Peso De La Fibra	36 oz/yd²	1220.6 g/m²



Método De Instalación Recomendado



Datos + Pruebas

Panel Radiante (Astm E648)	Class I
Nbs Humo	Less Than 450
Propensión Electrostática	Less Than 3.5 kv
Cri Green Label Plus (Glp)	GLP5563
Prueba De Pastillas (Pill)	Pass*
Ada Compliance	≥0.6, Cumple con las recomendaciones para el coeficiente de fricción estática para superficies transitables ADA y rutas accesibles***
Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.	

Garantías

Vitalicio Limitado A USo Comercial

Atributos + Certificaciones

Certifications Below Apply Exclusively To The Carpet Tile Rug Itself And Not The Lokworx Tabs Adhesive

Health & Wellbeing

Material Ingredient Transparency

Cradle to Cradle Certified® | Silver Level (Version 4.0)
Health Product Declaration (HPD) | Divulgado 1,000 ppm
Living Building Challenge (LBC) | Libre De Químicos Red List
Declare | Compatible LBC
NSF 140 | Oro
CRI Green Label Plus (GLP) | GLP5563

Indoor Air Quality

Climate Impact

Environmental Product Declaration (EPD)

Certificado Tercerizado De Acuerdo Con La Norma ISO14044,
ISO14025 & EN15804
5.72 kg CO₂/m²
Carbon Neutral
66% (Pre-Consumer 66% | Post-Consumer 0%)
100% Recyclable

Embodied Carbon (Cradle to Gate)

Life-Cycle Carbon Emissions

Total Recycled Content

Product Packaging

Global Product Assessment

Singapore Green Label | Certificado
CE Marking (EN 14041) | Certificado Tercerizado
Environmental Guarantee* | Re[turn] Reclamation Program* | Through
Our Environmental Guarantee, Shaw Pledges to Transport And
Recycle Any Ecoworx Carpet.
Country of Origin** | Imported

Contribución Para Créditos Leed

Crédito MR: Divulgación y optimización de productos de construcción
Declaraciones ambientales de productos - Opción 1: Declaración ambiental
de productos (EPD)

3rd Party Certified in Accordance with ISO14044, ISO14025 & EN15804

Crédito MR: Divulgación y optimización de productos de construcción
Ingredientes de materiales - Opción 1: Informe de ingredientes de los
materiales

HPD (Version 2.1) or C2C Silver Level (Version 4.0)

Crédito MR: Divulgación y optimización de productos de construcción
Ingredientes de materiales - Opción 2: Optimización de ingredientes de los
materiales

C2C Silver Level (Version 4.0)

MR Credit: Building Product Disclosure and Optimization
Sourcing of Raw Materials - Option 2: Leadership Extraction Practices






















Environmental Guarantee: Re[turn] Reclamation Program* | Through
Our Environmental Guarantee, Shaw Pledges to Transport And
Recycle Any Ecoworx Carpet.
Green Label Plus Certification: GLP5563

Crédito EQ: Materiales de baja emisión
Opción 1: Cálculos de categoría de producto

Ecoworx Tile with Lokdots Installation System

MR Credit: Interiors Life-Cycle Impact Reduction
Option 3: Design for Flexibility

Available Colorways

 <div>Osage Orange 41202 LRV 17.2 (range 12.4 - 21.5)</div>	 <div>Fustic Wood 41316 LRV 3 (range 2.8 - 3.2)</div>	 <div>Fustic Saxon 41396 LRV 8.8 (range 6.6 - 10.4)</div>	 <div>Black Walnut 41402 LRV 12.7 (range 11.6 - 14.6)</div>	 <div>Saxon 41462 LRV 5.7 (range 3.8 - 7.6)</div>	 <div>Cornflower 41480 LRV 4.8 (range 3.1 - 6.3)</div>
 <div>Knotweed 41491 LRV 12.0 (range 10.6 - 12.8)</div>	 <div>Indigo 41496 LRV 2.9 (range 2.1 - 3.7)</div>	 <div>Woad 41497 LRV 4.0 (range 2.6 - 5.5)</div>	 <div>Sumac 41504 LRV 9.2 (range 6.4 - 11.8)</div>	 <div>Logwood 41505 LRV 3.1 (range 2.2 - 4.3)</div>	 <div>Black Tea 41516 LRV 10.1 (range 8.8 - 11.9)</div>
 <div>Henna 41535 LRV 12.6 (range 10.7 - 13.8)</div>	 <div>Iron 41580 LRV 6.8 (range 4.7 - 8.4)</div>	 <div>Sandalwood 41665 LRV 13.2 (range 11.7 - 15)</div>	 <div>Lac 41762 LRV 3.5 (range 2.8 - 4.2)</div>	 <div>Brazil Wood 41855 LRV 2.8 (range 2.1 - 3.3)</div>	 <div>Madder Root 41864 LRV 7.7 (range 5.1 - 9.3)</div>
 <div>Cochineal 41880 LRV 4.9 (range 3.3 - 6.6)</div>	 <div>Beet 41890 LRV 5.3 (range 4.8 - 6)</div>	 <div>Iris 41965 LRV 3.8 (range 2.7 - 4.8)</div>			

Información Adicional

* To learn more about the recyclability of our products and our re[TURN], please visit shawcontract.com/sustainability.

**Meets or exceeds all local and national regulations in country of manufacture.

***This carpet is manufactured to be ADA compliant, but to be fully ADA compliant, the end-user must ensure the carpet is adhered to the floor and installed as outlined in the ADA standards.

Installation Guidelines

Maintenance Guidelines

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

