



Offset Taskworx® Tile

Numéro Du Style	5T334	
Collection	Simply By Nature	
Type De Produit	Dalles De Moquette	
Construction	Standard	Data + Performance
Type De Fabrication	ISO 2424	tufted 1/10"   39.4 per 10cm
Construction	ISO 2424	Tufté Structuré Bouclé à Motif
Méthode De Coloration	EN 994	100% Solution Teinte
Dimensions Du Produit	EN 994	50 cm x 50 cm   20 tiles (5 m²) per box
Sous-couche Primaire	ISO 2424	Pet Non-Woven
Sous-couche Secondaire	ISO 2424	Taskworx® Tile   Bitume Modifié Par Polymère
Fibre	ISO 2424	Ecosolution Q® Polyamide 6
Epaisseur Du Velours	ISO 1765	6.5 mm
Épaisseur Du Velours Fini	ISO 1766	2.4 mm
Poids Total	ISO 8543	4187 g/m²
Poids Tufté	ISO 2424	542 g/m²
Poids Du Velours Utile	ISO 8543	252 g/m²
Densité Du Velours	ISO 8543	0.106 g/cm³
Contenu Recyclé Total	52% (pre-consumer 52%   post-consumer 0%)	

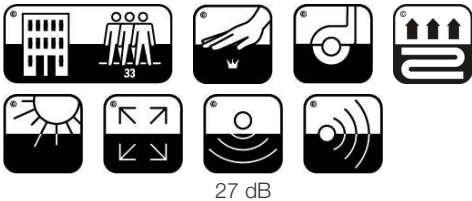



Données

Points	ISO 1763	160,000/m²   40.7 per 10cm
Traitements Protecteurs	SSP® Shaw Protection Du Sol	
Propension Electrostatique	ISO 6356	≤ 2.0 kv (Stroll Test)
Classification d'Utilisation	EN 1307	33 Commercial Heavy
Classification Luxe	EN 1307	LC1
Stabilité Dimensionnelle	EN 986	≤ 0.2%
Isolation Acoustique	ISO 10140	27 Db
Classification d'Absorption Sonore	ISO 354/11654	0.20 Aw   Class E
Résistance Thermique m² K/w	ISO 8302	0.076 M² K/W Tog 0.76
Dry Slip Resistance	ISO 13893	Pass / No Pulled Loops
Résistance De La Couleur À La Lumière	ISO 105-B02	>6
Inflammabilité	EN 13501-1	Bfl-S1 (Adhered Testing)
Chaise À Roulette	EN 985	≥2.4 Continuous USE

Limitée Commerciale De 15 Ans subject to installation in full accordance with the manufacturer's instructions and a regular effective cleaning and maintenance programme. Second location warranties are available with the use of non-adhesive IOBAC Magtabs and Tabit accessories.

Méthodes d'Installation Conseillées



17  
EU.DOP/0493/CPR/0621/0422/BT  
OOSTERHOUT SHOWROOM, VAARTWEG 10, 4905  
BL NETHERLANDS (NLD)  
Notified Body 2895

22  
UK.DOP/0338/CPR/1220/0422/BT  
SHAW EUROPE LIMITED BLACKADDIE RD,  
SANQUHAR DG4 6DB, UNITED KINGDOM  
Approved Body 0338

EN14041:2004/AC:2006  
For use as an indoor floor covering as specified by the manufacturer

Coordination Des Produits

Carpet Tile: **Arrange Taskworx® Tile, Array Taskworx® Tile, Structure Taskworx® Tile**

Attributs + Certifications

Certifications Below Apply Exclusively To The Carpet Tile Rug Itself And Not The Lokworx Tabs Adhesive

Declaration of Performance	<b>EU.DOP/0493/CPR/0621/0422/BT</b>
Building Research Establishment (BRE)	<b>A+ Health/A+ Retail 0.301/0.399 Ecopoints</b>
pays d'origine	<b>United Kingdom</b>
BREEAM Contribution Credit	<b>Certificate of Approval Schools/Offices/Health/Industrial Shed Retail</b>











Air Quality

Indoor Air Comfort Gold	<b>Certified</b>
M1	<b>Certified</b>

Memberships

WGBC Framework	<b>WGBC Framework</b>
UKGBC	<b>UKGBC</b>
Emirates Green Building Council	<b>Emirates Green Building Council</b>
Chemsec	<b>Chemsec</b>

Indice De Réflexion Lumineuse

					
Glassy Green 94335 LRV 8   L* 33.89	Shimmery Blue 94485 LRV 7.5   L* 32.81	Chrome Black 94500 LRV 5.2   L* 27.34	Glossy Charcoal 94505 LRV 6.1   L* 29.55	Sterling Silver 94515 LRV 14.1   L* 44.37	Steel Grey 94530 LRV 9.2   L* 36.38
					
Mirror Grey 94535 LRV 16   L* 46.99	Polished Stone 94557 LRV 7.3   L* 32.39	Metallic Beige 94760 LRV 16.9   L* 48.07	Shiny Pebble 94761 LRV 12.1   L* 41.41		

Informations Supplémentaires

Limitée commerciale de 15 ans	Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.
	This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
	Visit <a href="http://shawcontract.com/testing">shawcontract.com/testing</a> for more information.

