

Offset Taskworx® Tile

Stijlnummer	5T334	
Collectie	Simply By Nature	
Producttype	Tapijttegel	
Construction	Standard	Data + Performance
Type Fabricage	ISO 2424	tufted 1/10" 39.4 per 10cm
Uitzicht	ISO 2424	Multilevel-Patroonlus
Verfmethode	EN 994	100% In Oplossing Geverfd
Productformaat	EN 994	50 cm x 50 cm 20 tiles (5 m²) per box
Primaire Backing	ISO 2424	Pet Nonwoven
Secundaire Backing	ISO 2424	Taskworx® Tegel Polymeer Gemodificeerd Bitumen
Vezel	ISO 2424	Ecosolution Q® Polyamide 6
Totale Dikte	ISO 1765	6.5 mm
Afgewerkte Pooldikte	ISO 1766	2.4 mm
Totale Massa	ISO 8543	4187 g/m²
Getuft Gewicht	ISO 2424	542 g/m²
Effectieve Poolmassa	ISO 8543	252 g/m²
Pooldichtheid	ISO 8543	0.106 g/cm³
Totaal Gerecycleerde Inhoud		52% (pre-consumer 52% post-consumer 0%)




Gegevens

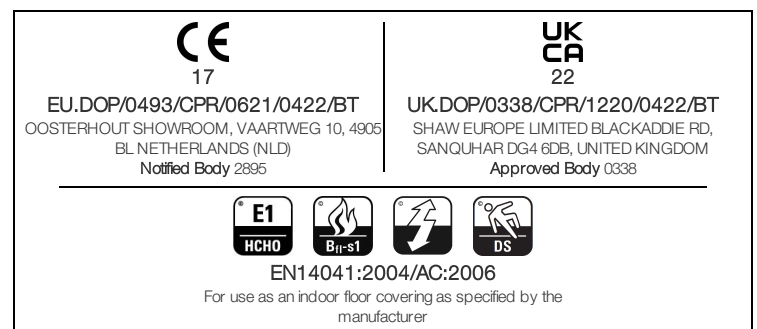
Steken	ISO 1763	160,000/m² 40.7 per 10cm
Beschermende Behandelingen		SSP® Shaw Grondbescherming
Elektrostatische Weerstand	ISO 6356	≤ 2.0 kv (Stroll Test)
Gebruik Classificatie	EN 1307	33 Commercial Heavy
Luxe klasse	EN 1307	LC1
Dimensionale Stabiliteit	EN 986	≤ 0.2%
Contactgeluidsisolatie	ISO 10140	27 Db
Geluidsabsorptieclassificatie	ISO 354/11654	0.20 Aw Class E
Warmteweerstand m² K/w	ISO 8302	0.076 M² K/W Tog 0.76
Weerstand Tegen Droog Uitglijden	ISO 13893	Pass / No Pulled Loops
Kleurvastheid Voor Licht	ISO 105-B02	>6
Ontvlambaarheid	EN 13501-1	Bfl-S1 (Adhered Testing)
Stoel Met Wielletjes	EN 985	≥2.4 Continuous USE

15 Jaar Commercieel Beperkt subject to installation in full accordance with the manufacturer's instructions and a regular effective cleaning and maintenance programme. Second location warranties are available with the use of non-adhesive IOBAC Magtabs and Tabit accessories.

Aanbevolen Installatiemethode



27 dB



Coördinerende Producten

Carpet Tile: **Arrange Taskworx® Tile, Array Taskworx® Tile, Structure Taskworx® Tile**

Kenmerken + Certificeringen

Certifications Below Apply Exclusively To The Carpet Tile Rug Itself And Not The Lokworx Tabs Adhesive

Declaration of Performance	EU.DOP/0493/CPR/0621/0422/BT
Building Research Establishment (BRE)	A+ Health/A+ Retail 0.301/0.399 Ecopoints
land van herkomst	Verenigd Koninkrijk
BREEAM Contribution Credit	Certificate of Approval Schools/Offices/Health/Industrial Shed Retail











Air Quality

Indoor Air Comfort Gold	Certified
M1	Certified

Memberships

WGBC Framework	WGBC Framework
UKGBC	UKGBC
Emirates Green Building Council	Emirates Green Building Council
Chemsec	Chemsec

Lichtreflectiewaarde

					
Glassy Green 94335 LRV 8 L* 33.89	Shimmery Blue 94485 LRV 7.5 L* 32.81	Chrome Black 94500 LRV 5.2 L* 27.34	Glossy Charcoal 94505 LRV 6.1 L* 29.55	Sterling Silver 94515 LRV 14.1 L* 44.37	Steel Grey 94530 LRV 9.2 L* 36.38
					
Mirror Grey 94535 LRV 16 L* 46.99	Polished Stone 94557 LRV 7.3 L* 32.39	Metallic Beige 94760 LRV 16.9 L* 48.07	Shiny Pebble 94761 LRV 12.1 L* 41.41		

Aanvullende Informatie

15 jaar commercieel beperkt	Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.
	This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
	Visit shawcontract.com/testing for more information.

