


## Situation Taskworx® Tile

Style Number	<b>5T338</b>	
Collection	<b>District</b>	
Product Type	<b>Carpet Tile</b>	
Construction	<b>Standard</b>	<b>Data + Performance</b>
Type of Manufacture	<b>ISO 2424</b>	<b>tufted 1/10"   39.4 per 10cm</b>
Aspect	<b>ISO 2424</b>	<b>Multi-Level Pattern Loop</b>
Dye Method	<b>EN 994</b>	<b>100% Solution Dyed</b>
Dimensions	<b>EN 994</b>	<b>50 cm x 50 cm   20 tiles (5 m²) per box</b>
Primary Backing	<b>ISO 2424</b>	<b>Pet Non-Woven</b>
Secondary Backing	<b>ISO 2424</b>	<b>Taskworx® Tile   Polymer Modified Bitumen</b>
Pile Fibre Composition	<b>ISO 2424</b>	<b>Eco Solution Q® Polyamide 6</b>
Total Thickness	<b>ISO 1765</b>	<b>6.1 mm</b>
Effective Pile Thickness	<b>ISO 1766</b>	<b>2.0 mm</b>
Total Mass	<b>ISO 8543</b>	<b>3934 g/m²</b>
Nominal Total Pile Mass	<b>ISO 2424</b>	<b>474 g/m²</b>
Effective Pile Mass	<b>ISO 8543</b>	<b>210 g/m²</b>
Pile Density	<b>ISO 8543</b>	<b>0.107 g/cm³</b>
Total Recycled Content		<b>52% (pre-consumer 52%   post-consumer 0%)</b>


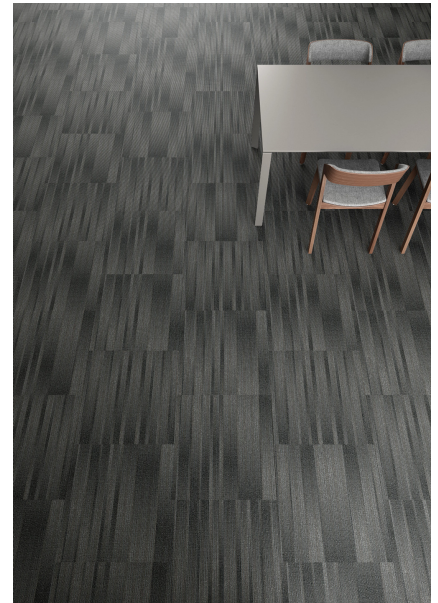


### Performance

Number of Tufts	<b>ISO 1763</b>	<b>153,000/m²   38.7 per 10cm</b>
Electrostatic Propensity	<b>ISO 6356</b>	<b>≤ 2.0 kv (Stroll Test)</b>
Use Classification	<b>EN 1307</b>	<b>33 Commercial Heavy</b>
Luxury Class	<b>EN 1307</b>	<b>LC1</b>
Dimensional Stability	<b>EN 986</b>	<b>≤ 0.2%</b>
Impact Sound Insulation	<b>ISO 10140</b>	<b>25db</b>
Sound Absorption Classification	<b>ISO 354/11654</b>	<b>0.15 Aw   Class E</b>
Thermal Resistance m² K/W	<b>ISO 8302</b>	<b>0.081 M² K/W Tog 0.81</b>
Dry Slip Resistance	<b>ISO 13893</b>	<b>Pass / No Pulled Loops</b>
Colour Fastness To Light	<b>ISO 105-B02</b>	<b>&gt;6</b>
Flammability	<b>EN 13501-1</b>	<b>Bfl-S1 (Adhered Testing)</b>
Castor Chair	<b>EN 985</b>	<b>≥2.4 Continuous Use</b>

15 Year Commercial Limited Warranty subject to installation in full accordance with the manufacturer's instructions and a regular effective cleaning and maintenance programme. Second location warranties are available with the use of non-adhesive IOBAC Magtabs and Tabit accessories.

### Recommended Installation Method

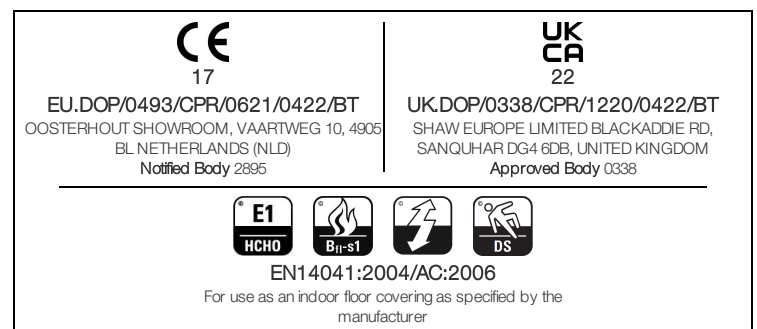

Coordinating Products

Carpet Tile: **Intent Taskworx® Tile, Purpose Taskworx® Tile**

Material Health & Environmental Certifications

Certifications below apply exclusively to the carpet tile rug itself and not the LokWorx Tabs adhesive

Declaration of Performance	<b>EU.DOP/0493/CPR/0621/0422/BT</b>
Building Research Establishment (BRE)	<b>A+ Health/A+ Retail 0.301/0.399 Ecopoints</b>
Country of Origin**	<b>United Kingdom</b>
BREEAM Contribution Credit	<b>Certificate of Approval Schools/Offices/Health/Industrial Shed Retail</b>













Air Quality

Indoor Air Comfort Gold	<b>Certified</b>
M1	<b>Certified</b>

Memberships

WGBC Framework	<b>WGBC Framework</b>
UKGBC	<b>UKGBC</b>
Emirates Green Building Council	<b>Emirates Green Building Council</b>
Chemsec	<b>Chemsec</b>

Light Reflectance Value

					
 Stellar 08505 LRV 3.2   L* 20.71	 Skylight 08530 LRV 13.3   L* 43.19	 Nocturne 08557 LRV 8.6   L* 35.26	 Shale 08597 LRV 5.1   L* 27.11	 Woodsmoke 08760 LRV 10.6   L* 38.87	 Sierra 08761 LRV 12   L* 41.2

 **Quick Ship** In Stock - UK

Additional Information

15 Year Commercial Limited warranty

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](https://shawcontract.com/testing) for more information.

