


## Convene Taskworx® Tile

Style Number	<b>5T329</b>	
Collection	<b>Assembly</b>	
Product Type	<b>Carpet Tile</b>	
Construction	Standard	Data + Performance
Type of Manufacture	<b>ISO 2424</b>	<b>tufted 1/12"   47.2 per 10cm</b>
Aspect	<b>ISO 2424</b>	<b>Multi-Level Pattern Loop</b>
Dye Method	<b>EN 994</b>	<b>100% Solution Dyed</b>
Dimensions	<b>EN 994</b>	<b>25 cm x 100 cm   20 tiles (5 m²) per box</b>
Primary Backing	<b>ISO 2424</b>	<b>Pet Non-Woven</b>
Secondary Backing	<b>ISO 2424</b>	<b>Taskworx® Tile   Polymer Modified Bitumen</b>
Pile Fibre Composition	<b>ISO 2424</b>	<b>Eco Solution Q® Polyamide 6</b>
Total Thickness	<b>ISO 1765</b>	<b>6.2 mm</b>
Effective Pile Thickness	<b>ISO 1766</b>	<b>2.0 mm</b>
Total Mass	<b>ISO 8543</b>	<b>4121 g/m²</b>
Nominal Total Pile Mass	<b>ISO 2424</b>	<b>644 g/m²</b>
Effective Pile Mass	<b>ISO 8543</b>	<b>254 g/m²</b>
Pile Density	<b>ISO 8543</b>	<b>0.125 g/cm³</b>
Total Recycled Content		<b>50% (pre-consumer 50%   post-consumer 0%)</b>

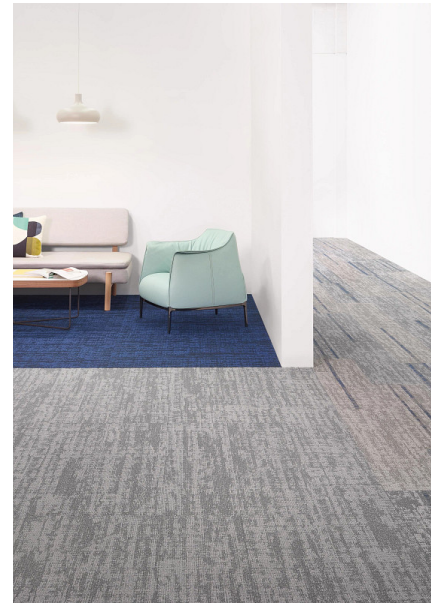

### Performance

Number of Tufts	<b>ISO 1763</b>	<b>165,000/m²   35 per 10cm</b>
Electrostatic Propensity	<b>ISO 6356</b>	<b>≤ 2.0 kv (Stroll Test)</b>
Use Classification	<b>EN 1307</b>	<b>33 Commercial Heavy</b>
Luxury Class	<b>EN 1307</b>	<b>LC1</b>
Dimensional Stability	<b>EN 986</b>	<b>≤ 0.2%</b>
Impact Sound Insulation	<b>ISO 10140</b>	<b>24 Db</b>
Sound Absorption Classification	<b>ISO 354/11654</b>	<b>0.15 Aw   Class E</b>
Thermal Resistance m² K/W	<b>ISO 8302</b>	<b>0.069 M² K/W Tog 0.69</b>
Dry Slip Resistance	<b>ISO 13893</b>	<b>Pass / No Pulled Loops</b>
Colour Fastness To Light	<b>ISO 105-B02</b>	<b>&gt;6</b>
Flammability	<b>EN 13501-1</b>	<b>Bfl-S1 (Adhered Testing)</b>
Castor Chair	<b>EN 985</b>	<b>≥2.4 Continuous Use</b>

15 Year Commercial Limited Warranty subject to installation in full accordance with the manufacturer's instructions and a regular effective cleaning and maintenance programme. Second location warranties are available with the use of non-adhesive IOBAC Magtabs and Tabit accessories.

### Recommended Installation Method



Ashlar



Brick



Herringbone



Monolithic



Stagger



24 dB

17

EU.DOP/0493/CPR/0621/0422/BT

OOSTERHOUT SHOWROOM, VAARTWEG 10, 4905 BL NETHERLANDS (NLD)

Notified Body 2895

22

UK.DOP/0338/CPR/1220/0422/BT

SHAW EUROPE LIMITED BLACKADDIE RD, SANQUHAR DG4 6DB, UNITED KINGDOM

Approved Body 0338

HCHO

Bfl-s1

DS

EN14041:2004/AC:2006

For use as an indoor floor covering as specified by the manufacturer

Coordinating Products

Carpet Tile: **Establish Comfortworx® Tile, Support Comfortworx® Tile, Convene Comfortworx® Tile, Support Taskworx® Tile, Establish Taskworx® Tile**

Material Health & Environmental Certifications

Certifications below apply exclusively to the carpet tile rug itself and not the LokWorx Tabs adhesive

Declaration of Performance	EU.DOP/0493/CPR/0621/0422/BT
Building Research Establishment (BRE)	A+ Health/A+ Retail 0.301/0.399 Ecopoints
Country of Origin**	United Kingdom
BREEAM Contribution Credit	Certificate of Approval Schools/Offices/Health/Industrial Shed Retail













Air Quality

Indoor Air Comfort Gold	Certified
M1	Certified


Memberships

WGBC Framework	WGBC Framework
UKGBC	UKGBC
Emirates Green Building Council	Emirates Green Building Council
Chemsec	Chemsec


Light Reflectance Value

					
Radiant System 67506 LRV 5.4   L* 27.89	Dynamic System 67507 LRV 5   L* 26.75	Clear System 67508 LRV 5.5   L* 28.18	Vivid System 67509 LRV 5.3   L* 27.65	Brilliant System 67510 LRV 7.1   L* 32.03	Radiant Interac 67516 LRV 12.3   L* 41.62
					
Dynamic Interac 67517 LRV 15.3   L* 46.04	Clear Interacti 67518 LRV 13.7   L* 43.75	Vivid Interacti 67519 LRV 15.5   L* 46.31	Brilliant Inter 67520 LRV 16.3   L* 47.36	Radiant Network 67536 LRV 11.5   L* 40.47	Dynamic Network 67537 LRV 12.6   L* 42.16







Clear Network 67538  
LRV 12.3 | L\* 41.65




Vivid Network 67539  
LRV 13.4 | L\* 43.3




Brilliant Netwo 67540  
LRV 14.8 | L\* 45.4




Radiant Link 67556  
LRV 7.6 | L\* 33.13




Dynamic Link 67557  
LRV 7.8 | L\* 33.64




Clear Link 67558  
LRV 8.2 | L\* 34.47




Vivid Link 67559  
LRV 8.3 | L\* 34.69




Brilliant Link 67560  
LRV 9.9 | L\* 37.68




Radiant Foundat 67581  
LRV 7.2 | L\* 32.19




Dynamic Foundat 67582  
LRV 7.3 | L\* 32.49



Clear Foundatio 67583  
LRV 7 | L\* 31.8



Vivid Foundatio 67584  
LRV 7.6 | L\* 33.06



Brilliant Found 67585  
LRV 9.4 | L\* 36.72

## Additional Information

15 Year Commercial Limited warranty

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](https://shawcontract.com/testing) for more information.



Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302

© 2025 Shaw Industries Group, Inc., a Berkshire Hathaway Company  
July 29, 2025

3 of 3