


Convene Taskworx® Tile

Numéro Du Style	5T329	
Collection	Assembly	
Type De Produit	Dalles De Moquette	
Construction	Standard	Data + Performance
Type De Fabrication	ISO 2424	tufted 1/12" 47.2 per 10cm
Construction	ISO 2424	Tufté Structuré Bouclé à Motif
Méthode De Coloration	EN 994	100% Solution Teinte
Dimensions Du Produit	EN 994	25 cm x 100 cm 20 tiles (5 m²) per box
Sous-couche Primaire	ISO 2424	Pet Non-Woven
Sous-couche Secondaire	ISO 2424	Taskworx® Tile Bitume Modifié Par Polymère
Fibre	ISO 2424	Ecosolution Q® Polyamide 6
Épaisseur Du Velours	ISO 1765	6.2 mm
Épaisseur Du Velours Fini	ISO 1766	2.0 mm
Poids Total	ISO 8543	4121 g/m²
Poids Tufté	ISO 2424	644 g/m²
Poids Du Velours Utile	ISO 8543	254 g/m²
Densité Du Velours	ISO 8543	0.125 g/cm³
Contenu Recyclé Total	48% (pre-consumer 48% post-consumer 0%)	

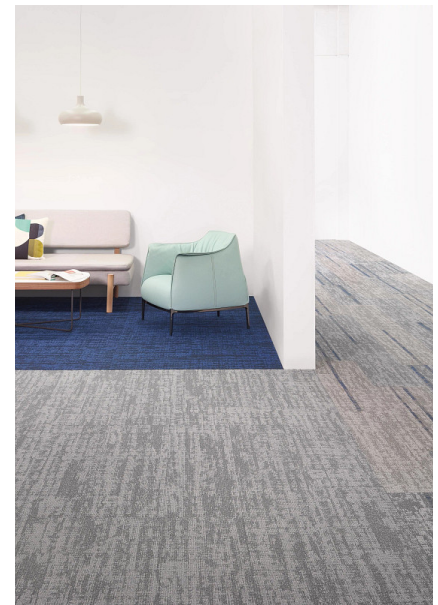

Données

Points	ISO 1763	165,000/m² 35 per 10cm
Propension Electrostatique	ISO 6356	≤ 2.0 kv (Stroll Test)
Classification d'Utilisation	EN 1307	33 Commercial Heavy
Classification Luxe	EN 1307	LC1
Stabilité Dimensionnelle	EN 986	≤ 0.2%
Isolation Acoustique	ISO 10140	24 Db
Classification d'Absorption Sonore	ISO 354/11654	0.15 Aw Class E
Résistance Thermique m² K/w	ISO 8302	0.069 M² K/W Tog 0.69
Dry Slip Resistance	ISO 13893	Pass / No Pulled Loops
Résistance De La Couleur À La Lumière	ISO 105-B02	>6
Inflammabilité	EN 13501-1	Bfl-S1 (Adhered Testing)
Chaise À Roulette	EN 985	≥2.4 Continuous USE

Limitée Commerciale De 15 Ans subject to installation in full accordance with the manufacturer's instructions and a regular effective cleaning and maintenance programme. Second location warranties are available with the use of non-adhesive IOBAC Magtabs and Tabit accessories.

Méthodes d'Installation Conseillées



Ashlar



Brick



Herringbone



Monolithic



Stagg



24 dB



EU.DOP/0493/CPR/0621/0422/BT
OOSTERHOUT SHOWROOM, VAARTWEG 10, 4905
BL NETHERLANDS (NLD)
Notified Body 2895



UK.DOP/0338/CPR/1220/0422/BT
SHAW EUROPE LIMITED BLACKADDIE RD,
SANQUHAR DG4 6DB, UNITED KINGDOM
Approved Body 0338



EN14041:2004/AC:2006

For use as an indoor floor covering as specified by the manufacturer

Coordination Des Produits

Carpet Tile: **Establish Comfortworx® Tile, Support Comfortworx® Tile, Convene Comfortworx® Tile, Support Taskworx® Tile, Establish Taskworx® Tile**

Attributs + Certifications

Certifications Below Apply Exclusively To The Carpet Tile Rug Itself And Not The Lokworx Tabs Adhesive

Declaration of Performance	EU.DOP/0493/CPR/0621/0422/BT
Building Research Establishment (BRE)	A+ Health/A+ Retail 0.301/0.399 Ecopoints
pays d'origine	United Kingdom
BREEAM Contribution Credit	Certificate of Approval Schools/Offices/Health/Industrial Shed Retail













Air Quality


Indoor Air Comfort Gold	Certified
M1	Certified

Memberships


WGBC Framework	WGBC Framework
UKGBC	UKGBC
Emirates Green Building Council	Emirates Green Building Council
Chemsec	Chemsec

Indice De Réflexion Lumineuse


					
Radiant System 67506 LRV 5.4 L* 27.89	Dynamic System 67507 LRV 5 L* 26.75	Clear System 67508 LRV 5.5 L* 28.18	Vivid System 67509 LRV 5.3 L* 27.65	Brilliant Syste 67510 LRV 7.1 L* 32.03	Radiant Interac 67516 LRV 12.3 L* 41.62
					
Dynamic Interac 67517 LRV 15.3 L* 46.04	Clear Interacti 67518 LRV 13.7 L* 43.75	Vivid Interacti 67519 LRV 15.5 L* 46.31	Brilliant Inter 67520 LRV 16.3 L* 47.36	Radiant Network 67536 LRV 11.5 L* 40.47	Dynamic Network 67537 LRV 12.6 L* 42.16




Clear Network 67538
LRV 12.3 | L* 41.65




Vivid Network 67539
LRV 13.4 | L* 43.3




Brilliant Netwo 67540
LRV 14.8 | L* 45.4




Radiant Link 67556
LRV 7.6 | L* 33.13




Dynamic Link 67557
LRV 7.8 | L* 33.64




Clear Link 67558
LRV 8.2 | L* 34.47




Vivid Link 67559
LRV 8.3 | L* 34.69




Brilliant Link 67560
LRV 9.9 | L* 37.68




Radiant Foundat 67581
LRV 7.2 | L* 32.19




Dynamic Foundat 67582
LRV 7.3 | L* 32.49



Clear Foundatio 67583
LRV 7 | L* 31.8



Vivid Foundatio 67584
LRV 7.6 | L* 33.06



Brilliant Found 67585
LRV 9.4 | L* 36.72

Informations Supplémentaires

Limitée commerciale de 15 ans

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.



Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302

© 2025 Shaw Industries Group, Inc., a Berkshire Hathaway Company
April 19, 2025

3 of 3