



Respond Taskworx® Tile

Stijlnummer	5T363	
Collectie	Living Systems	
Producttype	Tapijttegel	
Construction	Standard	Data + Performance
Type Fabricage	ISO 2424	tufted 1/10" 39.4 per 10cm
Uitzicht	ISO 2424	Multilevel-Patroonlus
Verfmethode	EN 994	100% In Oplossing Geverfd
Productformaat	EN 994	25 cm x 100 cm 20 tiles (5 m²) per box
Primaire Backing	ISO 2424	Pet Nonwoven
Secundaire Backing	ISO 2424	Taskworx® Tegel Polymeer Gemodificeerd Bitumen
Totale Dikte	ISO 1765	6.8 mm
Afgewerkte Pooldikte	ISO 1766	1.4 mm
Totale Massa	ISO 8543	4508 g/m²
Getuft Gewicht	ISO 2424	746 g/m²
Effectieve Poolmassa	ISO 8543	194 g/m²
Pooldichtheid	ISO 8543	0.136 g/cm³
Totaal Gerecycleerde Inhoud		66% (pre-consumer 66% post-consumer 0%)

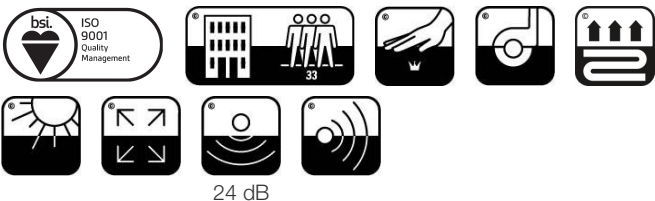


Gegevens

Steken	ISO 1763	124,000/m² 31.5 per 10cm
Elektrostatische Weerstand	ISO 6356	≤ 2.0 kv (Stroll Test)
Gebruik Classificatie	EN 1307	33 Commercial Heavy
Luxe klasse	EN 1307	LC1
Dimensionale Stabiliteit	EN 986	≤ 0.2%
Contactgeluidsisolatie	ISO 10140	24 Db
Geluidsabsorptieclassificatie	ISO 354/11654	0.15 Aw Class E
Warmteweerstand m² K/w	ISO 8302	0.081 M² K/W Tog 0.81
Weerstand Tegen Droog Uitglijden	ISO 13893	Pass / No Pulled Loops
Kleurvastheid Voor Licht	ISO 105-B02	>6
Ontvlambaarheid	EN 13501-1	Bfl-S1 (Adhered Testing)
Stoel Met Wieltjes	EN 985	≥2.4 Continuous Use

[15 Jaar Commercieel Beperkt](#) subject to installation in full accordance with the manufacturer's instructions and a regular effective cleaning and maintenance programme. Second location warranties are available with the use of non-adhesive IOBAC Magtabs and Tabit accessories.

Aanbevolen Installatiemethode



24 dB

17

EU.DOP/0493/CPR/0621/0422/BT

OOSTERHOUT SHOWROOM, VAARTWEG 10, 4905 BL NETHERLANDS (NLD)

Notified Body 2895

22

UK.DOP/0338/CPR/1220/0422/BT

SHAW EUROPE LIMITED BLACKADDIE RD, SANQUHAR DG4 6DB, UNITED KINGDOM

Approved Body 0338

EN14041:2004/AC:2006

For use as an indoor floor covering as specified by the manufacturer

Coördinerende Producten

Carpet Tile: **Observe Colour Comfortworx® Tile, Endless Comfortworx® Tile, Respond Colour Comfortworx® Tile, Transform Colour Comfortworx® Tile, Source Comfortworx® Tile, Boundless Comfortworx® Tile, Respond Comfortworx® Tile, Endless Taskworx® Tile, Observe Taskworx® Tile, Transform Taskworx® Tile, Respond Colour Taskworx® Tile, Observe Colour Taskworx® Tile, Transform Colour Taskworx® Tile, Boundless Taskworx® Tile, Source Taskworx® Tile**

Kenmerken + Certificeringen

Certifications Below Apply Exclusively To The Carpet Tile Rug Itself And Not The Lokworx Tabs Adhesive

Declaration of Performance

EU.DOP/0493/CPR/0621/0422/BT

Cradle to Cradle gecertificeerd™

Bronzen Vlak (Versie 3.1)

Environmental Product Declaration (EPD)

3de Partij Gecertificeerd in Overeenstemming Met ISO14044, ISO14025 & EN15804

Embodied Carbon (Cradle to Gate)

4.07 kg CO₂/m²

Life-Cycle Carbon Emissions

Carbon Neutral

Building Research Establishment (BRE)

A+ Health/A+ Retail 0.34/0.453 Ecopoints

milieugarantie

Terugnamebeleid Aangeboden Voor Alle Taskworx Producten

ISO 9001

Gecertificeerd

land van herkomst

Verenigd Koninkrijk

BREEAM Contribution Credit

**Certificate of Approval
Schools/Offices/Health/Industrial Shed
Retail**

Well V2 Contribution Credit

X08 Reductie gevaarlijke stoffen Deel 1: Beperking Optimalisatie Gevaarlijke Materialen - 1 pt

C2C Bronze Level (Version 3.1)

X10 Reductie van vluchtige stoffen Deel 1 (A): Beheer Vluchtige Organische Stoffen (VOS) Optimalisatie - 1 pt

C2C Bronze Level (Version 3.1)

X11 Langetermijn-emissiebeheersing - deel 2: Optimalisering van vloeren - 1 pt

M1> Emissions Class For Building Material

X13 Verbeterde materiaalvoorzorgsmaatregelen Deel 1: Optimaliseren van materiaalkeuze - max 2 punten

C2C Bronze Level (Version 3.1)

X14 Transparantie van materialen Deel 1: Optimalisatie: Bevorderen van ingrediëntenopenbaarmaking - max 2 punten

C2C Bronze Level (Version 3.1)

Groen Leed Bijdragekrediet

"MR-krediet: openbaarmaking en optimalisering van bouwproducten Milieuproductverklaringen - Optie 1: Milieuproductverklaring (EPD)"

3rd Party Certified in Accordance with ISO14044, ISO14025 & EN15804

"MR-krediet: Openbaarmaking en optimalisering van bouwproducten MateriaalIngrediënten - Optie 1: Rapportage materiaalIngrediënten"

C2C Bronze Level (Version 3.1)

"MR-krediet: openbaarmaking en optimalisering van bouwproducten MateriaalIngrediënten - Optie 2: Optimalisering van materiaalIngrediënten"

C2C Bronze Level (Version 3.1)

Air Quality

Indoor Air Comfort Gold

Certified

M1

Certified

Memberships

- WGBC Framework

UKGBC

Emirates Green Building Council










Chemsec
- WGBC Framework

UKGBC

Emirates Green Building Council

Chemsec

Lichtreflectiewaarde

					
Optimistic 05105 LRV 17.8 L* 49.3	Lava 05500 LRV 8.4 L* 34.87	Deepest 05505 LRV 6.2 L* 29.88	Radiant 05515 LRV 21.6 L* 53.57	Wild 05557 LRV 14.1 L* 44.33	Calm 05580 LRV 9.4 L* 36.7
					
Untamed 05595 LRV 13.7 L* 43.81	Fragile 05760 LRV 11.1 L* 39.77	Mountain 05761 LRV 18.5 L* 50.06			

Aanvullende Informatie

**Manufactured in ISO 9001 certified facility. Meets or exceeds all local and national regulations in country of manufacture.

[Installation Guidelines](#)

[Maintenance Guidelines](#)

15 jaar commercieel beperkt

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

