

## Feature Taskworx® Tile

Style Number	<b>5T385</b>	
Collection	<b>Auxiliary</b>	
Product Type	<b>Carpet Tile</b>	
Construction	<b>Standard</b>	<b>Data + Performance</b>
Type of Manufacture	<b>ISO 2424</b>	<b>tufted 1/12"   47.2 per 10cm</b>
Aspect	<b>ISO 2424</b>	<b>Level Loop</b>
Dye Method	<b>EN 994</b>	<b>100% Solution Dyed</b>
Dimensions	<b>EN 994</b>	<b>50 cm x 50 cm   20 tiles (5 m²) per box</b>
Primary Backing	<b>ISO 2424</b>	<b>Pet Non-Woven</b>
Secondary Backing	<b>ISO 2424</b>	<b>Taskworx® Tile   Polymer Modified Bitumen</b>
Pile Fibre Composition	<b>ISO 2424</b>	<b>Aquafil Polyamide 6</b>
Total Thickness	<b>ISO 1765</b>	<b>5.3 mm</b>
Effective Pile Thickness	<b>ISO 1766</b>	<b>2.1 mm</b>
Total Mass	<b>ISO 8543</b>	<b>3920 g/m²</b>
Nominal Total Pile Mass	<b>ISO 2424</b>	<b>450 g/m²</b>
Effective Pile Mass	<b>ISO 8543</b>	<b>259 g/m²</b>
Pile Density	<b>ISO 8543</b>	<b>0.122 g/cm³</b>
Total Recycled Content		<b>51% (pre-consumer 51%   post-consumer 0%)</b>



### Performance


Number of Tufts	<b>ISO 1763</b>	<b>184,000/m²   39 per 10 cm</b>
Electrostatic Propensity	<b>ISO 6356</b>	<b>≤ 2.0 kv (Stroll Test)</b>
Use Classification	<b>EN 1307</b>	<b>33 Commercial Heavy</b>
Luxury Class	<b>EN 1307</b>	<b>LC1</b>
Dimensional Stability	<b>EN 986</b>	<b>≤ 0.2%</b>
Impact Sound Insulation	<b>ISO 10140</b>	<b>23db</b>
Sound Absorption Classification	<b>ISO 354/11654</b>	<b>0.15 Aw   Class E</b>
Thermal Resistance m² K/W	<b>ISO 8302</b>	<b>0.046 M² K/W Tog 0.46</b>
Dry Slip Resistance	<b>ISO 13893</b>	<b>Pass / No Pulled Loops</b>
Colour Fastness To Light	<b>ISO 105-B02</b>	<b>&gt;6</b>
Flammability	<b>EN 13501-1</b>	<b>Bfl-S1 (Adhered Testing)</b>
Castor Chair	<b>EN 985</b>	<b>≥2.4 Continuous Use</b>

**15 Year Commercial Limited Warranty** subject to installation in full accordance with the manufacturer's instructions and a regular effective cleaning and maintenance programme. Second location warranties are available with the use of non-adhesive IOBAC Magtabs and Tabit accessories.


### Recommended Installation Method




Quarter Turn



Brick



Random

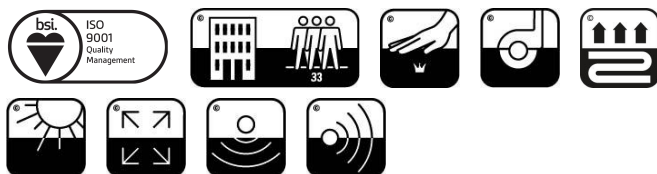

23dB

17

EU.DOP/0493/CPR/0621/0422/BT

OOSTERHOUT SHOWROOM, VAARTWEG 10, 4905 BL NETHERLANDS (NLD)

Notified Body 2895

22

UK.DOP/0338/CPR/1220/0422/BT

SHAW EUROPE LIMITED BLACKADDIE RD, SANQUHAR DG4 6DB, UNITED KINGDOM

Approved Body 0338

E1

HCHO

Bfl-s1

EN14041:2004/AC:2006

DS

For use as an indoor floor covering as specified by the manufacturer

## Coordinating Products

Carpet Tile: **Complement Hexagon Taskworx® Tile, Detail Hexagon Taskworx® Tile, Feature Hexagon Taskworx® Tile, Complement Taskworx® Tile, Detail Taskworx® Tile**

## Product Transparency

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. TaskWorx® products are Cradle to Cradle Certified® Bronze and assessed for impacts on human health and the environment. This product can be recycled. When it's time to replace, we can collect through our re-[TURN] scheme in EMEA.

## Material Health &amp; Environmental Certifications

Certifications below apply exclusively to the carpet tile rug itself and not the LokWorx Tabs adhesive

Declaration of Performance	<b>EU.DOP/0493/CPR/0621/0422/BT</b>
Cradle to Cradle Certified®	<b>Bronze Level (Version 3.1)</b>
Environmental Product Declaration (EPD)	<b>3rd Party Certified in Accordance with ISO14044, ISO14025 &amp; EN15804</b>
Building Research Establishment (BRE)	<b>A+ Health/A+ Retail 0.301/0.399 Ecopoints</b>
Environmental Guarantee*	<b>Take Back Policy Offered For All Taskworx Products</b>
ISO 9001	<b>Certified</b>
Country of Origin**	<b>United Kingdom</b>
BREEAM Contribution Credit	<b>Certificate of Approval Schools/Offices/Health/Industrial Shed Retail</b>

## WELL V2 Contribution Credit

X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization	<b>C2C Bronze Level (Version 3.1)</b>
X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization	<b>C2C Bronze Level (Version 3.1)</b>
X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization	<b>C2C Bronze Level (Version 3.1)</b>
X11 Long Term Emissions Control Part 2: Flooring Optimization	<b>M1&gt; Emissions Class For Building Material</b>
X13 Enhanced Material Precaution Part 1: Select Optimized Materials Optimization	<b>C2C Bronze Level (Version 3.1)</b>
X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization	<b>C2C Bronze Level (Version 3.1)</b>

## Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)	<b>3rd Party Certified in Accordance with ISO14044, ISO14025 &amp; EN15804</b>
MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 1: Material Ingredient Reporting	<b>C2C Bronze Level (Version 3.1)</b>
MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 2: Material Ingredient Optimization	<b>C2C Bronze Level (Version 3.1)</b>
EQ Credit: Low Emitting Materials Option 1: Product Category Calculations	<b>Certified</b>









Air Quality

Indoor Air Comfort Gold	Certified
M1	Certified

Memberships

WGBC Framework	WGBC Framework
UKGBC	UKGBC
Emirates Green Building Council	Emirates Green Building Council
Chemsec	Chemsec

Light Reflectance Value

					
Smoke Spring 83326 LRV 11.7 (range 8.6 - 18.0)   L* 40.67 (range 35.13 - 49.44)	Smoke Azure 83486 LRV 10.2 (range 8.6 - 12.3)   L* 38.26 (range 35.11 - 41.75)	Smoke Black 83505 LRV 7.3 (range 4.7 - 9.7)   L* 32.45 (range 25.89 - 37.26)	Pebble Ash 83535 LRV 10.8 (range 6.4 - 15.8)   L* 39.23 (range 30.44 - 46.67)	Smoke Ice 83536 LRV 12.1 (range 16.6 - 82.3)   L* 41.40 (range 34.5 - 47.74)	Pebble Flint 83549 LRV 6.5 (range 4.2 - 8.7)   L* 30.57 (range 24.16 - 35.34)
					
Pebble Coral 83866 LRV 8.4 (range 6.6 - 10.1)   L* 34.84 (range 30.95 - 38.02)	Pebble Blossom 83870 LRV 8.6 (range 7.3 - 10.8)   L* 35.19 (range 32.37 - 39.25)				

Quick Ship In Stock - UK

Additional Information

**Manufactured in ISO 9001 certified facility. Meets or exceeds all local and national regulations in country of manufacture.	
<a href="#">Installation Guidelines</a>	Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.
<a href="#">Maintenance Guidelines</a>	
<a href="#">15 Year Commercial Limited warranty</a>	This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.
	Visit <a href="http://shawcontract.com/testing">shawcontract.com/testing</a> for more information.

