


## Pixel Square Taskworx® Tile

| Stijlnummer                 | 5T386            |  |
|-----------------------------|------------------|--|
| Collectie                   | Colour Construct |  |
| Producttype                 | Tapijttegel      |  |
| Construction                | Standard         | Data + Performance                               |
| Type Fabricage              | ISO 2424         | tufted 1/12"   47.2 per 10cm                     |
| Uitzicht                    | ISO 2424         | Multilevel-Patroonlus                            |
| Verfmethode                 | EN 994           | 100% In Oplossing Geverfd                        |
| Productformaat              | EN 994           | 50 cm x 50 cm   20 tiles (5 m²) per box          |
| Primaire Backing            | ISO 2424         | Pet Nonwoven                                     |
| Secundaire Backing          | ISO 2424         | Taskworx® Tegel   Polymeer Gemodificeerd Bitumen |
| Vezel                       | ISO 2424         | Ecosolution Q® Polyamide 6                       |
| Totale Dikte                | ISO 1765         | 6.3 mm   |
| Afgewerkte Pooldikte        | ISO 1766         | 3.0 mm   |
| Totale Massa                | ISO 8543         | 4575 g/m²  |
| Getuft Gewicht              | ISO 2424         | 794 g/m²   |
| Effectieve Poolmassa        | ISO 8543         | 483 g/m²   |
| Pooldichtheid               | ISO 8543         | 0.161 g/cm³                                      |
| Totaal Gerecycleerde Inhoud |                  | 47% (pre-consumer 47%   post-consumer 0%)        |



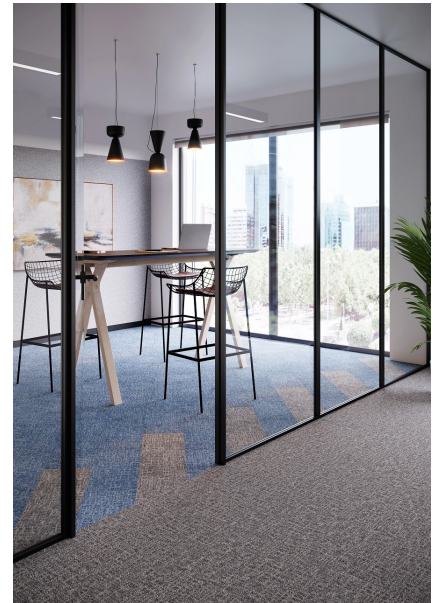


### Gegevens

|                                  |               |                            |
|----------------------------------|---------------|----------------------------|
| Steken                           | ISO 1763      | 155,000/m²   32.8 per 10cm |
| Elektrostatische Weerstand       | ISO 6356      | ≤ 2.0 kv (Stroll Test)     |
| Gebruik Classificatie            | EN 1307       | 33 Commercial Heavy        |
| Luxeklasse                       | EN 1307       | LC1                        |
| Dimensionale Stabiliteit         | EN 986        | ≤ 0.2%                     |
| Contactgeluidsisolatie           | ISO 10140     | 24 Db                      |
| Geluidsabsorptieclassificatie    | ISO 354/11654 | 0.15 Aw   Class E          |
| Warmteweerstand m² K/w           | ISO 8302      | 0.061 M² K/W Tog 0.61      |
| Weerstand Tegen Droog Uitglijden | ISO 13893     | Pass / No Pulled Loops     |
| Kleurvastheid Voor Licht         | ISO 105-B02   | >6                         |
| Ontvlambaarheid                  | EN 13501-1    | Bfl-S1 (Adhered Testing)   |
| Stoel Met Wieljes                | EN 985        | ≥2.4 Continuous USE        |

**15 Jaar Commercieel Beperkt** subject to installation in full accordance with manufacturer's instructions and a regular effective cleaning and maintenance programme.

### Aanbevolen Installatiemethode

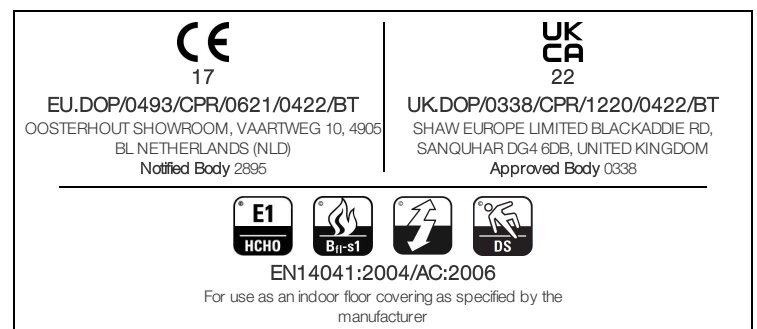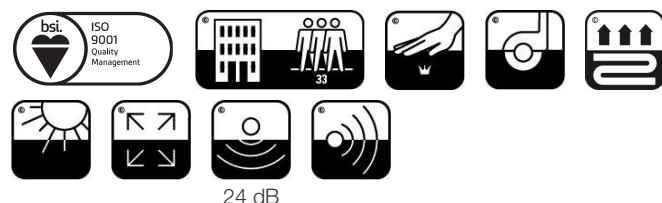

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +52 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +1 800 556 302

Coördinerende Producten

Carpet Tile: **Pixel Square Comfortworx® Tile, Pixel Rectangle Comfortworx® Tile, Pixel Hexagon Taskworx® Tile, Pixel Rectangle Taskworx® Tile**

Kenmerken + Certificeringen

Certifications Below Apply Exclusively To The Carpet Tile Rug Itself And Not The Lokworx Tabs Adhesive

|   |  |
|---|--|
| Declaration of Performance              | <b>EU.DOP/0493/CPR/0621/0422/BT</b>  |
| Cradle to Cradle gecertificeerd™        | <b>Bronzen Vlak (Versie 3.1)</b>   |
| Environmental Product Declaration (EPD) | <b>3de Partij Gecertificeerd in Overeenstemming Met ISO14044, ISO14025 &amp; EN15804</b> |
| Building Research Establishment (BRE)   | <b>A+ Health/A+ Retail 0.34/0.453 Ecopoints</b>  |
| milieugarantie                          | <b>Terugnamebeleid Aangeboden Voor Alle Taskworx Producten</b>                           |
| ISO 9001                                | <b>Gecertificeerd</b>  |
| land van herkomst                       | <b>Verenigd Koninkrijk</b>   |
| BREEAM Contribution Credit              | <b>Certificate of Approval<br/>Schools/Offices/Health/Industrial Shed<br/>Retail</b>     |

Well V2 Contribution Credit

|  |   |
|--|---|
| X08 Hazardous Material Reduction<br>Part 1: Limit Hazardous Materials Optimization                     | <b>C2C Bronze Level (Version 3.1)</b>               |
| X10 Volatile Compound Reduction<br>Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization   | <b>C2C Bronze Level (Version 3.1)</b>               |
| X10 Volatile Compound Reduction<br>Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization | <b>C2C Bronze Level (Version 3.1)</b>               |
| X11 Long Term Emissions Control<br>Part 2: Flooring Optimization                                       | <b>M1&gt; Emissions Class For Building Material</b> |
| X13 Enhanced Material Precaution<br>Part 1: Select Optimized Materials Optimization                    | <b>C2C Bronze Level (Version 3.1)</b>               |
| X14 Material Transparency<br>Part 1: Promote Ingredient Disclosure Optimization                        | <b>C2C Bronze Level (Version 3.1)</b>               |

Groen Leed Bijdragekrediet

|   |  |
|---|--|
| "MR-krediet: openbaarmaking en optimalisering van bouwproducten<br>Milieuproductverklaringen - Optie 1: Milieuproductverklaring (EPD)"        | <b>3rd Party Certified in Accordance with ISO14044, ISO14025 &amp; EN15804</b> |
| "MR-krediet: Openbaarmaking en optimalisering van bouwproducten<br>Materiaalingrediënten - Optie 1: Rapportage materiaalingrediënten"         | <b>C2C Bronze Level (Version 3.1)</b>  |
| "MR-krediet: openbaarmaking en optimalisering van bouwproducten<br>Materiaalingrediënten - Optie 2: Optimalisering van materiaalingrediënten" | <b>C2C Bronze Level (Version 3.1)</b>  |

























Air Quality

|                         |                  |
|-------------------------|------------------|
| Indoor Air Comfort Gold | <b>Certified</b> |
| M1                      | <b>Certified</b> |

Memberships

|                                 |  |
|---------------------------------|--|
| WGBC Framework                  | <b>WGBC Framework</b>                  |
| UKGBC                           | <b>UKGBC</b>                           |
| Emirates Green Building Council | <b>Emirates Green Building Council</b> |
| Chemsec                         | <b>Chemsec</b>                         |

Lichtreflectiewaarde

|  |   |   |  |   |   |
|--|---|---|--|---|---|
|    |    |    |    |    |    |
| Yellow 53211<br>LRV 26.5   | Chartreuse 53326<br>LRV 17.3  | Seaglass 53375<br>LRV 8.2   | Aqua 53418<br>LRV 13.9   | Wave 53432<br>LRV 6.8   | Navy 53485<br>LRV 5.3   |
|    |    |    |    |    |    |
| Blue 53486<br>LRV 9.5  | Arctic 53501<br>LRV 31  | Black 53505<br>LRV 2.6  | Light Taupe 53506<br>LRV 16.8  | Grey 53515<br>LRV 18.4  | Beige 53516<br>LRV 23.4   |
|   |   |   |   |   |   |
| Pewter 53518<br>LRV 11.3   | Nickel 53535<br>LRV 18.9  | Graphite 53549<br>LRV 3.9   | Charcoal 53557<br>LRV 6.2  | Steel 53580<br>LRV 7.5  | Urban 53592<br>LRV 11.8   |
|  |  |  |  |  |  |
| Gunmetal 53597<br>LRV 4.1  | Orange 53668<br>LRV 12.8  | Tangerine 53675<br>LRV 23.1   | Taupe 53761<br>LRV 12.5  | Poppy 53856<br>LRV 9.8  | Magenta 53991<br>LRV 5.6  |

Aanvullende Informatie

\*\*Manufactured in ISO 9001 certified facility. Meets or exceeds all local and national regulations in country of manufacture.

[Installation Guidelines](#)  
[Maintenance Guidelines](#)  
[15 jaar commercieel beperkt](#)

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.



Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +1 800 556 302