

Pavers II Tile

|                       |   |
|-----------------------|---|
| Product Type          | Carpet Tile   |
| Collection            | A Walk In The Garden  |
| Style Number          | 5T201   |
| Construction          | Multi-Level Pattern Loop  |
| Fiber                 | Ecosolution Q100® Nylon   |
| Dye Method            | 100% Solution Dyed  |
| Primary Backing       | Synthetic   |
| Secondary Backing     | Ecworx® Tile  |
| Protective Treatments | SSP® Shaw Soil Protection   |
| Recommended Adhesive  | 4151 Multi-Use Carpet Tile 4 Gallon, 5000 Carpet Tile 1 Gallon, LokWorx Adhesive Tabs, 3800 Indoor Outdoor Carpet Tile 4 Gallon, 5000 Carpet Tile 4 Gallon, LokDots, 3000 Carpet Tile 4 Gallon or 3000 Carpet Tile 1 Gallon |

|                         |              |                |
|-------------------------|--------------|----------------|
|                         | u.s.         | metric         |
| Product Size            | 9 in x 36 in | 23 cm x 91 cm  |
| Area per Carton         | 45 ft²       | 4.18 m²        |
| Pieces per Carton       | 20 pcs       |                |
| Gauge                   | 1/12 in      | 47.2 per 10 cm |
| Stitches                | 8.5 per in   | 33.0 per 10 cm |
| Finished Pile Thickness | 0.093 in     | 2.36 mm        |
| Average Density         | 6581 oz/yd³  | 0.243 g/cm³    |
| Kilotex                 |              | 9.49           |
| Total Thickness         | 0.240 in     | 6.1 mm         |
| Tufted Weight           | 17 oz/yd²    | 576.4 g/m²     |



Recommended Installation Method

Ashlar

Brick

Herringbone

Monolithic

Stagger

Performance + Testing

|                          |  |
|--------------------------|--|
| Radiant Panel            | Class I  |
| NBS Smoke                | Less Than 450  |
| Electrostatic Propensity | Less Than 3.5 kv   |
| Pill Test                | Pass*  |
| ADA Compliance           | >0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes*** |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

Lifetime Commercial Limited Warranty

Coordinating Products

Carpet Tile: **Basalt II Tile, Fault Lines II Tile**

Diversity & Inclusion

We promote supplier participation that is reflective of Shaw Industries' diverse customer base and local community. We believe having a strong Supplier Diversity Program is strategic for bringing more innovation to our businesses and opening new markets for growth.

Material Health & Environmental Certifications

Certifications below apply exclusively to the carpet tile rug itself and not the LokWorx Tabs adhesive

Health & Wellbeing

|                                  |   |
|----------------------------------|---|
| Material Ingredient Transparency | <b>Cradle to Cradle Certified®   Silver Level (Version 4.0)</b><br><b>Health Product Declaration (HPD)   1,000 ppm Disclosure</b><br><b>Living Building Challenge (LBC)   Free of Red List Chemicals</b><br><b>NSF 140   Gold</b> |
|----------------------------------|---|

Climate Impact

|   |  |
|---|--|
| Environmental Product Declaration (EPD) | <b>3rd Party Certified in Accordance with ISO14044, ISO14025 &amp; EN15804</b> |
| Total Recycled Content                  | <b>56% (Pre-Consumer 56%   Post-Consumer 0%)</b>                               |
| Product Packaging                       | <b>100% Recyclable</b>   |

Global Product Assessment

**CE Marking (EN 14041) | 3rd Party Certified**  
**Environmental Guarantee\* | Re[turn] Reclamation Program\* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Ecoworx Carpet.**  
**Country of Origin\*\* | USA**


WELL V2 Contribution Credit

|  |  |
|--|--|
| X08 Hazardous Material Reduction<br>Part 1: Limit Hazardous Materials Optimization                   | <b>C2C Silver Level (Version 4.0)</b>          |
| X10 Volatile Compound Reduction<br>Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization | <b>C2C Silver Level (Version 4.0)</b>          |
| X11 Long Term Emissions Control<br>Part 2: Flooring Optimization                                     | <b>Green Label Plus Certification: GLP9968</b> |
| X13 Enhanced Material Precaution<br>Part 1: Select Optimized Materials Optimization                  | <b>C2C Silver Level (Version 4.0)</b>          |
| X14 Material Transparency<br>Part 1: Promote Ingredient Disclosure Optimization                      | <b>C2C Silver Level (Version 4.0)</b>          |

Leed v4 Contribution Credits

|   |  |
|---|--|
| MR Credit: Building Product Disclosure and Optimization<br>Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD) | <b>3rd Party Certified in Accordance with ISO14044, ISO14025 &amp; EN15804</b>   |
| MR Credit: Building Product Disclosure and Optimization<br>Material Ingredients - Option 1: Material Ingredient Reporting                         | <b>C2C Silver Level (Version 4.0) or HPD (Version 2.1)</b>   |
| MR Credit: Building Product Disclosure and Optimization<br>Material Ingredients - Option 2: Material Ingredient Optimization                      | <b>C2C Silver Level (Version 4.0)</b>  |
| MR Credit: Building Product Disclosure and Optimization<br>Sourcing of Raw Materials - Option 2: Leadership Extraction Practices                  | <b>Environmental Guarantee: Re[turn] Reclamation Program*   Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Ecoworx Carpet.</b><br><b>Green Label Plus Certification: GLP9968</b> |
| EQ Credit: Low Emitting Materials<br>Option 1: Product Category Calculations  |  |
| MR Credit: Interiors Life-Cycle Impact Reduction<br>Option 3: Design for Flexibility  | <b>Ecoworx Tile with Lokdots Installation System</b>   |

### Available Colorways

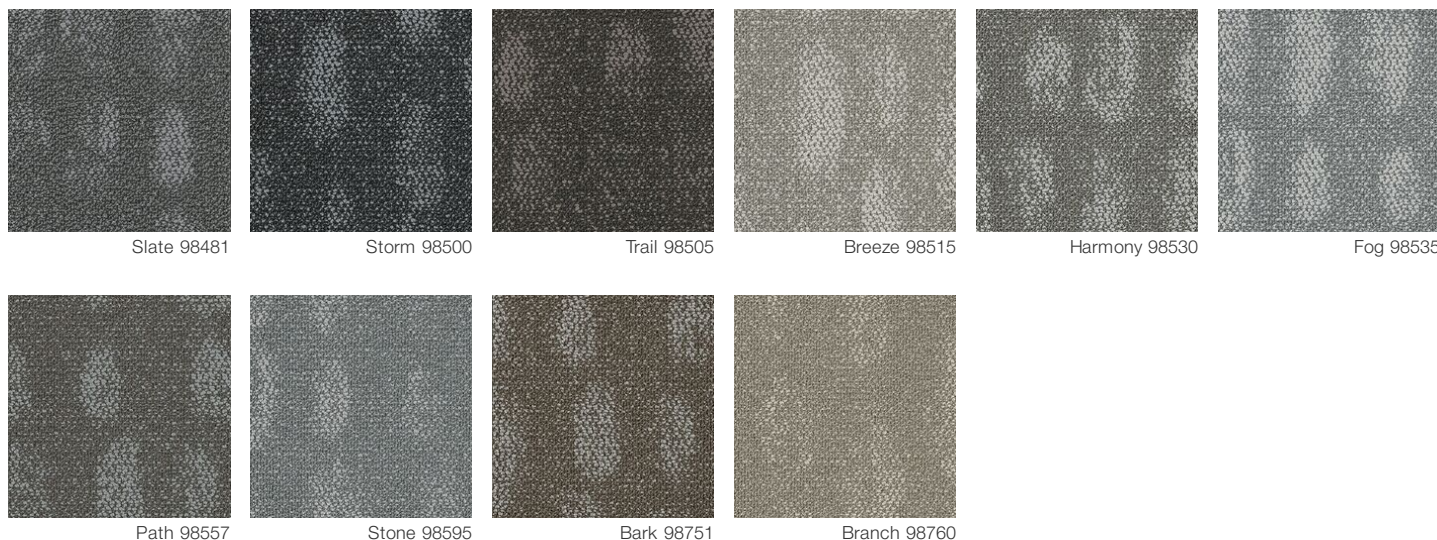

### Additional Information

\* To learn more about the recyclability of our products and our re[TURN], please visit [shawcontract.com/sustainability](https://shawcontract.com/sustainability).

\*\*Meets or exceeds all local and national regulations in country of manufacture.

\*\*\*This carpet is manufactured to be ADA compliant, but to be fully ADA compliant, the end-user must ensure the carpet is adhered to the floor and installed as outlined in the ADA standards.

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](https://shawcontract.com/testing) for more information.



Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302

© 2025 Shaw Industries Group, Inc., a Berkshire Hathaway Company  
July 2, 2025

3 of 3