

Belong Taskworx® Tile

| | | |
|--------------------------|--------------------|--|
| Style Number | 5T264 | |
| Collection | Kindred | |
| Product Type | Carpet Tile | |
| Construction | Standard | Data + Performance |
| Type of Manufacture | ISO 2424 | tufted 1/10" 39.4 per 10cm |
| Aspect | ISO 2424 | Multi-Level Pattern Loop |
| Dye Method | EN 994 | 100% Solution Dyed |
| Dimensions | EN 994 | 50 cm x 50 cm 20 tiles (5 m²) per box |
| Primary Backing | ISO 2424 | Pet Non-Woven |
| Secondary Backing | ISO 2424 | Taskworx® Tile Polymer Modified Bitumen |
| Pile Fibre Composition | ISO 2424 | Eco Solution Q® Polyamide 6 |
| Total Thickness | ISO 1765 | 5.6 mm |
| Effective Pile Thickness | ISO 1766 | 2.4 mm |
| Total Mass | ISO 8543 | 4086 g/m² |
| Nominal Total Pile Mass | ISO 2424 | 610 g/m² |
| Effective Pile Mass | ISO 8543 | 303 g/m² |
| Pile Density | ISO 8543 | 0.128 g/m³ |
| Total Recycled Content | | 51% (pre-consumer 51% post-consumer 0%) |



Performance

| | | |
|---------------------------------|----------------------|------------------------------------|
| Number of Tufts | ISO 1763 | 140,000/m² 35.4 per 10 cm |
| Electrostatic Propensity | ISO 6356 | ≤ 2.0 kv (Stroll Test) |
| Use Classification | EN 1307 | 33 Commercial Heavy |
| Luxury Class | EN 1307 | LC1 |
| Dimensional Stability | EN 986 | ≤ 0.2% |
| Impact Sound Insulation | ISO 10140 | 26 Db |
| Sound Absorption Classification | ISO 354/11654 | 0.15 Aw Class E |
| Thermal Resistance m² K/W | ISO 8302 | 0.054 M² K/W Tog 0.54 |
| Dry Slip Resistance | ISO 13893 | Pass/No Pulled Loops |
| Colour Fastness To Light | ISO 105-B02 | >6 |
| Flammability | EN 13501-1 | Bfl-S1 (Adhered Testing) |
| Castor Chair | EN 985 | ≥2.4 Continuous Use |

15 Year Commercial Limited Warranty subject to installation in full accordance with the manufacturer's instructions and a regular effective cleaning and maintenance programme. Second location warranties are available with the use of non-adhesive IOBAC Magtabs and Tabit accessories.


Recommended Installation Method




Monolithic




Quarter Turn




Brick




Ashlar



Random

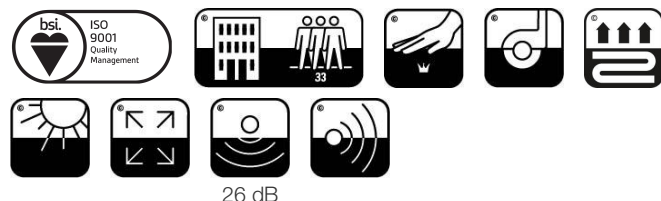

26 dB

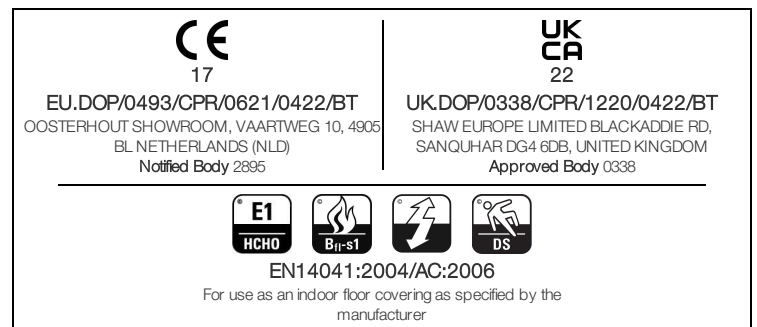

Coordinating Products

Carpet Tile: **Memory Comfortworx® Tile, Dream Comfortworx® Tile, Belong Comfortworx® Tile, Together Comfortworx® Tile, Illusion Comfortworx® Tile, Belong Taskworx® Hexagon Tile, Together Hexagon Taskworx® Tile, Dream Taskworx® Tile, Memory Taskworx® Tile, Together Taskworx® Tile, Illusion Taskworx® Tile, Together Ecoworx S® Tile, Illusion Ecoworx S® Tile, Memory Ecoworx S® Tile, Belong Ecoworx S® Tile, Dream Ecoworx S® Tile**

Product Transparency

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. TaskWorx® products are Cradle to Cradle Certified® Bronze and assessed for impacts on human health and the environment. This product can be recycled. When it's time to replace, we can collect through our re-[TURN] scheme in EMEA.

Material Health & Environmental Certifications

Certifications below apply exclusively to the carpet tile rug itself and not the LokWorx Tabs adhesive

| | |
|---|--|
| Declaration of Performance | EU.DOP/0493/CPR/0621/0422/BT |
| Cradle to Cradle Certified® | Bronze Level (Version 3.1) |
| Environmental Product Declaration (EPD) | 3rd Party Certified in Accordance with ISO 14044, ISO 14025 & EN15804 |
| Building Research Establishment (BRE) | A+ Health/A+ Retail 0.301/0.399 Ecopoints |
| Environmental Guarantee* | Take Back Policy Offered For All Taskworx Products |
| ISO 9001 | Certified |
| Country of Origin** | United Kingdom |
| BREEAM Contribution Credit | Certificate of Approval Schools/Offices/Health/Industrial Shed Retail |

WELL V2 Contribution Credit

| | |
|--|---|
| X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization | C2C Bronze Level (Version 3.1) |
| X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization | C2C Bronze Level (Version 3.1) |
| X10 Volatile Compound Reduction Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization | C2C Bronze Level (Version 3.1) |
| X11 Long Term Emissions Control Part 2: Flooring Optimization | M1> Emissions Class For Building Material |
| X13 Enhanced Material Precaution Part 1: Select Optimized Materials Optimization | C2C Bronze Level (Version 3.1) |
| X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization | C2C Bronze Level (Version 3.1) |

Leed v4 Contribution Credits

| | |
|---|--|
| MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD) | 3rd Party Certified in Accordance with ISO 14044, ISO 14025 & EN15804 |
| MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 1: Material Ingredient Reporting | C2C Bronze Level (Version 3.1) |
| MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 2: Material Ingredient Optimization | C2C Bronze Level (Version 3.1) |
| EQ Credit: Low Emitting Materials Option 1: Product Category Calculations | Certified |











Air Quality

| | |
|-------------------------|-----------|
| Indoor Air Comfort Gold | Certified |
| M1 | Certified |

Memberships

| | |
|---------------------------------|---------------------------------|
| WGBC Framework | WGBC Framework |
| UKGBC | UKGBC |
| Emirates Green Building Council | Emirates Green Building Council |
| Chemsec | Chemsec |

Light Reflectance Value

| | | | | | |
|---|--|--|---|---|---|
|  |  |  |  |  |  |
| Golden 48211 LRV 20.5 L* 52.43 | Comfort 48323 LRV 12.6 L* 42.11 | Greenery 48370 LRV 14.6 L* 45.1 | Serene 48486 LRV 10.9 L* 39.37 | Hearten 48515 LRV 14.1 L* 44.39 | Greige 48516 LRV 22.6 L* 54.64 |
|  |  |  |  | | |
| Sense 48535 LRV 12.8 L* 42.44 | Rainstorm 48536 LRV 18.5 L* 50.09 | Apricot 48675 LRV 19.1 L* 50.79 | Rosewood 48870 LRV 17.2 L* 48.48 | | |

Additional Information

**Manufactured in ISO 9001 certified facility. Meets or exceeds all local and national regulations in country of manufacture.

[Installation Guidelines](#)

[Maintenance Guidelines](#)

[15 Year Commercial Limited warranty](#)

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.