

Stone Taskworx® Tile

|                          |   |   |
|--------------------------|---|---|
| Style Number             | 5T454                                     |   |
| Collection               | Floor Architecture III                    |   |
| Product Type             | Carpet Tile                               |   |
| Construction             | Standard                                  | Data + Performance                        |
| Type of Manufacture      | ISO 2424                                  | tufted 1/10"   39.4 per 10cm              |
| Aspect                   | ISO 2424                                  | Multi-Level Pattern Loop                  |
| Dye Method               | EN 994                                    | 100% Solution Dyed                        |
| Dimensions               | EN 994                                    | 50 cm x 50 cm   20 tiles (5 m²) per box   |
| Primary Backing          | ISO 2424                                  | Pet Non-Woven                             |
| Secondary Backing        | ISO 2424                                  | Taskworx® Tile   Polymer Modified Bitumen |
| Pile Fibre Composition   | ISO 2424                                  | Eco Solution Q® Polyamide 6               |
| Total Thickness          | ISO 1765                                  | 6.7 mm                                    |
| Effective Pile Thickness | ISO 1766                                  | 3.3 mm                                    |
| Total Mass               | ISO 8543                                  | 3980 g/m²                                 |
| Nominal Total Pile Mass  | ISO 2424                                  | 630 g/m²                                  |
| Effective Pile Mass      | ISO 8543                                  | 354 g/m²                                  |
| Pile Density             | ISO 8543                                  | 0.108 g/cm³                               |
| Total Recycled Content   | 49% (pre-consumer 49%   post-consumer 0%) |   |

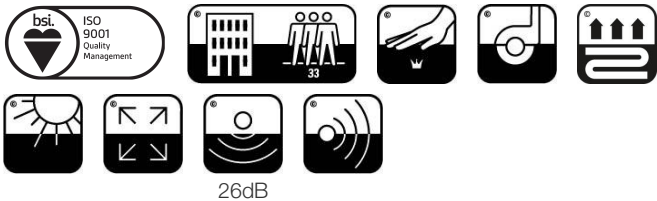
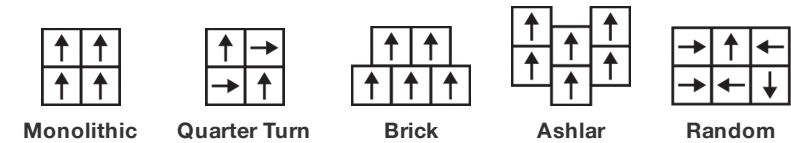



Performance

|                                 |               |                            |
|---------------------------------|---------------|----------------------------|
| Number of Tufts                 | ISO 1763      | 165,000/m²   42.0 per 10cm |
| Electrostatic Propensity        | ISO 6356      | ≤ 2.0 kv (Stroll Test)     |
| Use Classification              | EN 1307       | 33 Commercial Heavy        |
| Luxury Class                    | EN 1307       | LC1                        |
| Dimensional Stability           | EN 986        | ≤ 0.2%                     |
| Impact Sound Insulation         | ISO 10140     | 26db                       |
| Sound Absorption Classification | ISO 354/11654 | 0.15 Aw   Class E          |
| Thermal Resistance m² K/W       | ISO 8302      | 0.077 M² K/W Tog 0.77      |
| Dry Slip Resistance             | ISO 13893     | Pass / No Pulled Loops     |
| Colour Fastness To Light        | ISO 105-B02   | >6                         |
| Flammability                    | EN 13501-1    | Bfl-S1 (Adhered Testing)   |
| Castor Chair                    | EN 985        | ≥2.4 Continuous Use        |

15 Year Commercial Limited Warranty subject to installation in full accordance with manufacturer's instructions and a regular effective cleaning and maintenance programme.

Recommended Installation Method






17

EU.DOP/0493/CPR/0621/0422/BT

OOSTERHOUT SHOWROOM, VAARTWEG 10, 4905 BL NETHERLANDS (NLD)

Notified Body 2895







22

UK.DOP/0338/CPR/1220/0422/BT

SHAW EUROPE LIMITED BLACKKADDIE RD, SANQUHAR DG4 6DB, UNITED KINGDOM

Approved Body 0338



EN14041:2004/AC:2006

For use as an indoor floor covering as specified by the manufacturer

Coordinating Products

Carpet Tile: **Stone Comfortworx® Tile, Fragment Comfortworx® Tile, Formation Colours Comfortworx® Tile, Fragment Colours Comfortworx® Tile, Stone Colours Comfortworx® Tile, Formation Comfortworx® Tile, Fragment Taskworx® Tile, Formation Colours Ecoworx S Tile, Fragment Colours Ecoworx S Tile, Formation Colours Taskworx® Tile, Fragment Colours Taskworx® Tile, Fragment Ecoworx S Tile, Stone Ecoworx S Tile, Formation Taskworx® Tile, Formation Ecoworx S Tile, Stone Colours Taskworx® Tile, Stone Colours Ecoworx® S Tile**

Product Transparency

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. TaskWorx® products are Cradle to Cradle Certified® Bronze and assessed for impacts on human health and the environment. This product can be recycled. When it's time to replace, we can collect through our re-[TURN] scheme in EMEA.

Material Health & Environmental Certifications

Certifications below apply exclusively to the carpet tile rug itself and not the LokWorx Tabs adhesive

|   |   |
|---|---|
| Declaration of Performance              | EU.DOP/0493/CPR/0621/0422/BT  |
| Cradle to Cradle Certified®             | Bronze Level (Version 3.1)  |
| Environmental Product Declaration (EPD) | 3rd Party Certified in Accordance with ISO14044, ISO14025 & EN15804         |
| Environmental Guarantee*                | Take Back Policy Offered For All Taskworx Products                          |
| ISO 9001                                | Certified   |
| Country of Origin**                     | United Kingdom  |
| BREEAM Contribution Credit              | Certificate of Approval<br>Schools/Offices/Health/Industrial Shed<br>Retail |

WELL V2 Contribution Credit

|  |   |
|--|---|
| X08 Hazardous Material Reduction<br>Part 1: Limit Hazardous Materials Optimization                     | C2C Bronze Level (Version 3.1)            |
| X10 Volatile Compound Reduction<br>Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization   | C2C Bronze Level (Version 3.1)            |
| X10 Volatile Compound Reduction<br>Part 2: Manage Semi-Volatile Organic Compounds (SVOCs) Optimization | C2C Bronze Level (Version 3.1)            |
| X11 Long Term Emissions Control<br>Part 2: Flooring Optimization                                       | M1> Emissions Class For Building Material |
| X13 Enhanced Material Precaution<br>Part 1: Select Optimized Materials Optimization                    | C2C Bronze Level (Version 3.1)            |
| X14 Material Transparency<br>Part 1: Promote Ingredient Disclosure Optimization                        | C2C Bronze Level (Version 3.1)            |

Leed v4 Contribution Credits

|   |   |
|---|---|
| MR Credit: Building Product Disclosure and Optimization<br>Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD) | 3rd Party Certified in Accordance with ISO14044, ISO14025 & EN15804 |
| MR Credit: Building Product Disclosure and Optimization<br>Material Ingredients - Option 1: Material Ingredient Reporting                         | C2C Bronze Level (Version 3.1)                                      |
| MR Credit: Building Product Disclosure and Optimization<br>Material Ingredients - Option 2: Material Ingredient Optimization                      | C2C Bronze Level (Version 3.1)                                      |
| EQ Credit: Low Emitting Materials<br>Option 1: Product Category Calculations  | Certified   |










Air Quality

|                         |           |
|-------------------------|-----------|
| Indoor Air Comfort Gold | Certified |
| M1                      | Certified |

Memberships

|                                 |                                 |
|---------------------------------|---------------------------------|
| WGBC Framework                  | WGBC Framework                  |
| UKGBC                           | UKGBC                           |
| Emirates Green Building Council | Emirates Green Building Council |
| Chemsec                         | Chemsec                         |

Light Reflectance Value

|   |  |  |  |   |   |
|---|--|--|--|---|---|
|   |   |   |  |  |  |
| Marble 53100<br>LRV 14.5   L* 44.88   | Azurite 53485<br>LRV 4.3   L* 24.71  | Granite 53500<br>LRV 4.3   L* 24.5   | Mica 53518<br>LRV 11.5   L* 40.44  | Mortar 53530<br>LRV 29.5   L* 61.24   | Limestone 53535<br>LRV 15.4   L* 46.16  |
|  |  |  |  |   |   |
| Anthracite 53555<br>LRV 7.2   L* 32.31  | Chromite 53580<br>LRV 10.3   L* 38.44  | Mix 53597<br>LRV 7.5   L* 32.89  |  |   |   |

Additional Information

|   |  |
|---|--|
| **Manufactured in ISO 9001 certified facility. Meets or exceeds all local and national regulations in country of manufacture. |  |
| <a href="#">Installation Guidelines</a>   | Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.                   |
| <a href="#">Maintenance Guidelines</a>  |  |
| <a href="#">15 Year Commercial Limited warranty</a>   | This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited. |
|   | Visit <a href="http://shawcontract.com/testing">shawcontract.com/testing</a> for more information.   |

