


Upbeat Tile

| | | |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Product Type | Carpet Tile | |
| Collection | New Path | |
| Style Number | 5T490 | |
| Construction | Multi-Level Pattern Loop | |
| Dye Method | Solution Dyed | |
| Primary Backing | Synthetic | |
| Secondary Backing | Strataworx® Tile | |
| Protective Treatments | SSP® Shaw Soil Protection | |
| Recommended Adhesive | LokDots, 3000 Carpet Tile 4 Gallon, 3000 Carpet Tile 1 Gallon, 4151 Multi-Use Carpet Tile 4 Gallon, 5000 Carpet Tile 1 Gallon, LokWorx Adhesive Tabs, 3800 Indoor Outdoor Carpet Tile 4 Gallon or 5000 Carpet Tile 4 Gallon | |
| | u.s. | metric |
| Product Size | 18 in x 36 in | 46 cm x 91 cm |
| Area Per Box | 63 ft² | 5.85 m² |
| Pieces Per Box | 14 pcs | |
| Gauge | 1/12 in | 47.2 per 10 cm |
| Stitches | 8.0 per in | 32.5 per 10 cm |
| Finished Pile Thickness | 0.093 in | 2.36 mm |
| Average Density | 6581 oz/yd³ | 0.243 g/cm³ |
| Kilotex | | 9.16 |
| Total Thickness | 0.220 in | 5.59 mm |
| Tufted Weight | 17 oz/yd² | 576.4 g/m² |



Recommended Installation Method

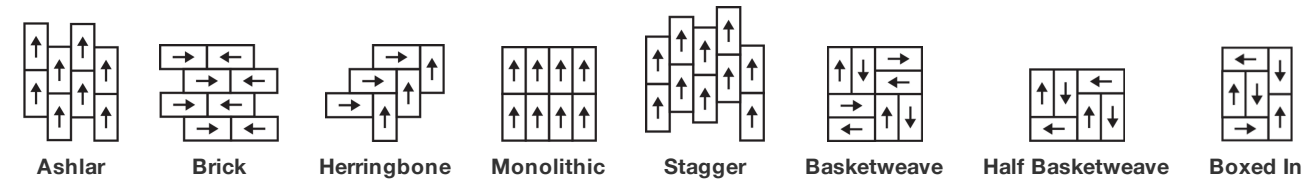

Data + Testing

| | |
|----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| Radiant Panel (Astm E648) | Class I |
| Nbs Smoke | Less Than 450 |
| Electrostatic Propensity | Less Than 3.5 kv |
| Cri Green Label Plus (Glp) | GLP2671 |
| Pill Test | Pass* |
| Ada Compliance | >0.6, Meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes*** |
| Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number. | |

Warranties

15 Year Commercial Limited

Coordinating Products

Carpet Tile: **Positive Ecoworx® Tile, Calm Ecoworx® Tile, Upbeat Ecoworx® Tile, Centered Ecoworx® Tile, Positive Tile, Centered Tile, Calm Tile**

Attributes + Certifications

Certifications Below Apply Exclusively To The Carpet Tile Rug Itself And Not The Lokworx Tabs Adhesive

Health & Wellbeing

| | |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Material Ingredient Transparency | Cradle to Cradle Certified® Silver Level (Version 3.1) Health Product Declaration (HPD) 1,000 ppm Disclosure Living Building Challenge (LBC) Free of Red List Chemicals Declare LBC Compliant Declare LBC Compliant NSF 140 Gold CRI Green Label Plus (GLP) GLP2671 |
| Indoor Air Quality | |
| Climate Impact | |
| Environmental Product Declaration (EPD) | 3rd Party Certified in Accordance with ISO14044, ISO14025 & EN15804 |
| Embodied Carbon (Cradle to Gate) | 3.27 kg CO₂/m² |
| Life-Cycle Carbon Emissions | Carbon Neutral |
| Total Recycled Content | 52% (Pre-Consumer 52% Post-Consumer 0%) |
| Product Packaging | 100% Recyclable |
| Global Product Assessment | Singapore Green Label Certified Environmental Guarantee* Re[turn] Reclamation Program* Pickup & Delivery Available Country of Origin** USA & China |

Well V2 Contribution Credit

| | |
|----------------------------------------------------------------------------------------------------------|------------------------------------------------|
| X08 Hazardous Material Reduction Part 1: Limit Hazardous Materials Optimization – 1 pt | C2C Silver Level (Version 3.1) |
| X10 Volatile Compound Reduction Part 1 (A): Manage Volatile Organic Compounds (VOCs) Optimization – 1 pt | C2C Silver Level (Version 3.1) |
| X11 Long Term Emissions Control Part 2: Flooring Optimization – 1 pt | Green Label Plus Certification: GLP2671 |
| X13 Enhanced Material Precaution Part 1: Select Optimized Materials Optimization – max 2 pts | C2C Silver Level (Version 3.1) |
| X14 Material Transparency Part 1: Promote Ingredient Disclosure Optimization – max 2 pts | C2C Silver Level (Version 3.1) |


Leed Contribution Credit

| | |
|---------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| MR Credit: Building Product Disclosure and Optimization Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD) | 3rd Party Certified in Accordance with ISO14044, ISO14025 & EN15804 |
| MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 1: Material Ingredient Reporting | HPD (Version 2.1) or C2C Silver Level (Version 3.1) |
| MR Credit: Building Product Disclosure and Optimization Material Ingredients - Option 2: Material Ingredient Optimization | C2C Silver Level (Version 3.1) |
| EQ Credit: Low Emitting Materials Option 1: Product Category Calculations | Green Label Plus Certification: GLP2671 |


Available Colorways



Bubbly 90100
LRV 27.9 | L* 59.77




Satisfied 90111
LRV 18.1 | L* 49.64




Refreshed 90323
LRV 12.2 | L* 41.48



Optimistic 90375
LRV 8.5 | L* 34.98



Strong 90481
LRV 11.6 | L* 40.61



Confident 90486
LRV 7.5 | L* 32.85



Mysterious 90500
LRV 5.0 | L* 26.75




Spontaneous 90505
LRV 10.5 | L* 38.72




Grateful 90518
LRV 18.7 | L* 50.38



Empowered 90555
LRV 12.3 | L* 41.62




Focused 90580
LRV 18.5 | L* 50.14



Delightful 90780
LRV 16.8 | L* 47.97



Expressive 90865
LRV 7.5 | L* 32.97



Cheeky 90870
LRV 12.7 | L* 42.32

Additional Information

* To learn more about the recyclability of our products and our Environmental Guarantee, please visit shawcontract.com/sustainability.

**Meets or exceeds all local and national regulations in country of manufacture.

***This carpet is manufactured to be ADA compliant, but to be fully ADA compliant, the end-user must ensure the carpet is adhered to the floor and installed as outlined in the ADA standards.

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.



Declare.



PVC-Free

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302

© 2025 Shaw Industries Group, Inc., a Berkshire Hathaway Company
July 2, 2025

3 of 3