


Knit Tile

| | | |
|-----------------------------|---|----------------|
| Nom De Style | Carreaux De Tapis | |
| Collection | Texture Study | |
| Numéro De Style | 5T650 | |
| Construction | Boucle De Motif à Plusieurs Niveaux | |
| Fibre | Ecosolution Q100™ Nylon | |
| Méthode De Teinture | 100% Teint EN Solution | |
| Endos Primaire | Synthétique | |
| Traitements Protecteur | Protection Des Sols SSP® Shaw | |
| Adhésif Recommandé | LokDots, 3000 Carpet Tile 4 Gallon, 3000 Carpet Tile 1 Gallon, 4252 Multi-Use PSA Adhesive 4 gallon, 4151 Multi-Use Carpet Tile 4 Gallon, 5000 Carpet Tile 1 Gallon, LokWorx Adhesive Tabs, 3800 Indoor Outdoor Carpet Tile 4 Gallon or 5000 Carpet Tile 4 Gallon | |
| | u.s. | metric |
| Dimensions Du Produit | 9 in x 36 in | 23 cm x 91 cm |
| Surface Par Carton | 45 ft² | 4.18 m² |
| Pièces Par Carton | 20 pcs | |
| Jauge | 1/10 in | 39.4 per 10 cm |
| Compte De Mailles | 9.0 per in | 35.0 per 10 cm |
| Épaisseur Fini | 0.137 in | 3.48 mm |
| Densité | 5781 oz/yd³ | 0.214 g/cm³ |
| Poids De La Fibre Touffetée | 0.285 in | 7.24 mm |
| Poids De La Fibre Touffetée | 22 oz/yd² | 745.9 g/m² |



Méthodes d'Installation Conseillées

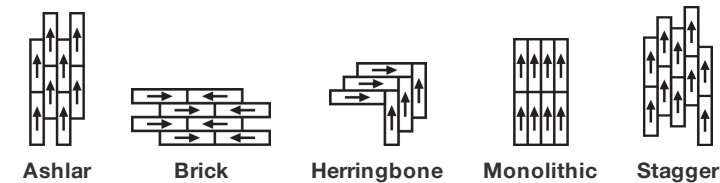

Spécifications Du Rendement + Tests Et Essai

| | |
|--|---|
| Essai Au Panneau Radiant (Astm E648) | Class I |
| Densité Du Fumée | Less Than 450 |
| Statique | Less Than 3.5 kv |
| Label Cri Green Label Plus (Glp) | GLP9968 |
| Inflammabilité | Pass* |
| Ada Conformité | ≥0.6, conforme au coefficient de frottement statique pour les surfaces de passage et d'accessibilité simplifiée (ADA).*** |
| Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number. | |

Garanties

Commerciale Limitée

Coordination Des Produits

Carpet Tile: **Classic Tile, Cozy Tile, Homespun Tile, Subtle Tile, Timeless Tile, Weft Tile, Woolen Tile**

Attributs + Certifications

Certifications Below Apply Exclusively To The Carpet Tile Rug Itself And Not The Lokworx Tabs Adhesive

Health & Wellbeing

Material Ingredient Transparency

**Health Product Declaration (HPD) | Divulgateion De 1 000 ppm
Living Building Challenge (LBC) | Exempt De Produits Chimiques De La
Liste Rouge
Declare | Conforme LBC
NSF 140 | or
CRI Green Label Plus (GLP) | GLP9968**

Indoor Air Quality

Climate Impact

Environmental Product Declaration (EPD)

**3rd Party Certified in Accordance with ISO 21930:2017, UI Part A & ISO
14025:2006
2.4 kg CO₂/m²
Carbon Neutral
100% Recyclable**

Embodied Carbon (Cradle to Gate)

Life-Cycle Carbon Emissions

Product Packaging

Global Product Assessment

**CE Marking (EN 14041) | Certifié Par Un Tiers
Environmental Guarantee* | Re[turn] Reclamation Program* | Through
Our Environmental Guarantee, Shaw Pledges to Transport And
Recycle Any Ecoworx Carpet.
Country of Origin** | Imported**

Well V2 Contribution Credit

X11 Contrôle des émissions à long terme Partie 2 : Optimisation des revêtements de sol – 1 pt

Green Label Plus Certification: GLP9968

Contribution Au Certificat Vert Leed


« Crédit MR : Divulgateion et optimisation des produits de construction

**Environmental Guarantee: Re[turn] Reclamation Program* | Through
Our Environmental Guarantee, Shaw Pledges to Transport And
Recycle Any Ecoworx® Carpet.
Green Label Plus Certification: GLP9968
Ecoworx Bio Tile with Lokdots Installation System**

Crédit EQ : matériaux faibles émissions

MR Credit: Interiors Life-Cycle Impact Reduction
Option 3: Design for Flexibility


Available Colorways




Roving 48100



Linen 48105




Jute 48111




Tweed 48505



Boucle 48516




Merino 48535



Fleece 48580



Chenille 48595



Suede 48760

Informations Supplémentaires

* To learn more about the recyclability of our products and our re[TURN], please visit shawcontract.com/sustainability.

**Meets or exceeds all local and national regulations in country of manufacture.

***This carpet is manufactured to be ADA compliant, but to be fully ADA compliant, the end-user must ensure the carpet is adhered to the floor and installed as outlined in the ADA standards.

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.



Declare.



PVC-Free

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302

© 2025 Shaw Industries Group, Inc., a Berkshire Hathaway Company
July 29, 2025

3 of 3