


Josef Tile

| | | |
|-----------------------------|---|----------------|
| Nom De Style | Carreaux De Tapis | |
| Collection | Curate | |
| Numéro De Style | 5T642 | |
| Fibre | Ecosolution Q100™ Nylon | |
| Méthode De Teinture | 100% Teint EN Solution | |
| Endos Primaire | Synthétique | |
| Endos Secondaire | Ecoworx® Tile | |
| Traitements Protecteur | Protection Des Sols SSP® Shaw | |
| Adhésif Recommandé | 3000 Carpet Tile 4 Gallon, 3000 Carpet Tile 1 Gallon, 5000 Carpet Tile 4 Gallon, 5000 Carpet Tile 1 Gallon, 4151 Multi-Use Carpet Tile 4 Gallon, 3800 Indoor Outdoor Carpet Tile 4 Gallon, LokDots or LokWorx Adhesive Tabs | |
| | u.s. | metric |
| Dimensions Du Produit | 24 in x 24 in | 61 cm x 61 cm |
| Surface Par Carton | 48 ft² | 4.46 m² |
| Pièces Par Carton | 12 pcs | |
| Jauge | 1/10 in | 39.4 per 10 cm |
| Compte De Mailles | 8.0 per in | 32.5 per 10 cm |
| Épaisseur Fini | 0.147 in | 3.73 mm |
| Densité | 6367 oz/yd³ | 0.236 g/cm³ |
| Poids De La Fibre Touffetée | 0.340 in | 8.64 mm |
| Poids De La Fibre Touffetée | 26 oz/yd² | 881.5 g/m² |

Méthodes d'Installation Conseillées

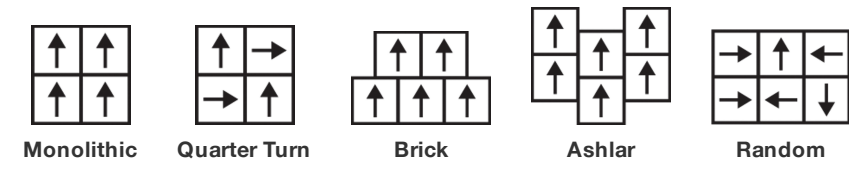

Spécifications Du Rendement + Tests Et Essai

| | |
|--|---|
| Essai Au Panneau Radiant (Astm E648) | Class I |
| Densité Du Fumée | Less Than 450 |
| Statique | Less Than 3.5 kv |
| Label Cri Green Label Plus (Glp) | GLP9968 |
| Inflammabilité | Pass* |
| Ada Conformité | ≥0.6, conforme au coefficient de frottement statique pour les surfaces de passage et d'accessibilité simplifiée (ADA).*** |
| Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number. | |

Garanties

Commerciale Limitée

Coordination Des Produits

Carpet Tile: **Apollo Tile, Atticus Tile, Delphi Tile, Agnes Tile, Lenore Tile, Jackson Tile, Sheila Tile, Gustav Tile, Pierre Tile, Andy Tile, Stella Tile, Annie Tile, Kelly Tile, Marli Tile, Otti Tile, Keith Tile**

Attributs + Certifications

Certifications Below Apply Exclusively To The Carpet Tile Rug Itself And Not The Lokworx Tabs Adhesive

Health & Wellbeing

Material Ingredient Transparency

Cradle to Cradle Certified® | Silver Level (Version 4.0)
Health Product Declaration (HPD) | Divulgarion De 1 000 ppm
Living Building Challenge (LBC) | Exempt De Produits Chimiques De La
Liste Rouge
Declare | Conforme LBC
NSF 140 | or
CRI Green Label Plus (GLP) | GLP9968

Indoor Air Quality

Climate Impact

Environmental Product Declaration (EPD)

Certifié Par Une Tierce Partie Conformément Aux Normes ISO 14044,
ISO 14025 Et EN 15804
3.87 kg CO₂/m²
Low Embodied Carbon
60% (Pre-Consumer 60% | Post-Consumer 0%)
100% Recyclable

Embodied Carbon (Cradle to Gate)

Life-Cycle Carbon Emissions

Total Recycled Content

Product Packaging

Global Product Assessment

Singapore Green Label | Agréé
CE Marking (EN 14041) | Certifié Par Un Tiers
Environmental Guarantee* | Re[turn] Reclamation Program* | Through
Our Environmental Guarantee, Shaw Pledges to Transport And
Recycle Any Ecoworx Carpet.
Country of Origin | Imported**

Well V2 Contribution Credit

| | |
|---|--|
| X08 Réduction des matières dangereuses Partie 1 : Optimisation des limites des matières dangereuses – 1 pt | C2C Silver Level (Version 4.0) |
| X10 Réduction des composés volatils Partie 1 (A) : Gérer l'optimisation des composés organiques volatils (COV) - 1 pt | C2C Silver Level (Version 4.0) |
| X11 Contrôle des émissions à long terme Partie 2 : Optimisation des revêtements de sol – 1 pt | Green Label Plus Certification: GLP9968 |
| X13 Enhanced Material Precaution Part 1: Select Optimized Materials Optimization - max 2 pts | C2C Silver Level (Version 4.0) |
| X14 Transparence des matériaux Partie 1 : Promouvoir l'optimisation de la divulgation des ingrédients - max 2 pts | C2C Silver Level (Version 4.0) |


Contribution Au Certificat Vert Leed

- « Crédit MR : Divulcation et optimisation des produits de construction
- « Crédit MR : Divulcation et optimisation des produits de construction
- « Crédit MR : Divulcation et optimisation des produits de construction
- « Crédit MR : Divulcation et optimisation des produits de construction


Crédit EQ : matériaux faibles émissions

MR Credit: Interiors Life-Cycle Impact Reduction
Option 3: Design for Flexibility


Available Colorways



Fresco 42411
LRV 36.8 | L* 67.11



Graphite 42518
LRV 43.6 | L* 71.95



Pastel 42675
LRV 34.4 | L* 65.31

Informations Supplémentaires

* To learn more about the recyclability of our products and our re[TURN], please visit shawcontract.com/sustainability.

**Meets or exceeds all local and national regulations in country of manufacture.

***This carpet is manufactured to be ADA compliant, but to be fully ADA compliant, the end-user must ensure the carpet is adhered to the floor and installed as outlined in the ADA standards.

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.



PVC-Free

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +55 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 800 556 302