

Transfer

|                             |                                                                              |                     |
|-----------------------------|------------------------------------------------------------------------------|---------------------|
| Product Type                | Broadloom                                                                    |                     |
| Collection                  | View                                                                         |                     |
| Style Number                | 5A203                                                                        |                     |
| Construction                | Multi-Level Pattern Loop                                                     |                     |
| Fibre                       | Ecosolution Q® Nylon                                                         |                     |
| Dye Method                  | 100% Solution Dyed                                                           |                     |
| Primary Backing             | Synthetic                                                                    |                     |
| Secondary Backing           | Classicbac®                                                                  |                     |
| Protective Treatments       | SSP® Shaw Soil Protection                                                    |                     |
| Recommended Adhesive        | 1000 Broadloom 4 Gallon, Shaw 1200 or 3800 Indoor Outdoor Broadloom 4 Gallon |                     |
|                             | u.s.                                                                         | metric              |
| Product Size                | 12 ft                                                                        | 3.66 m              |
| Gauge                       | 1/10 in                                                                      | 39.4 per 10 cm      |
| Stitches                    | 11.0 per in                                                                  | 43.0 per 10 cm      |
| Finished Pile Thickness     | 0.143 in                                                                     | 3.63 mm             |
| Average Density             | 5035 oz/yd³                                                                  | 0.186 g/cm³         |
| Kilotex                     |                                                                              | 10.9                |
| Total Thickness             | 0.270 in                                                                     | 6.86 mm             |
| Tufted Weight               | 20 oz/yd²                                                                    | 678.1 g/m²          |
| Installation Pattern Repeat | 14.4 in x 14.4 in                                                            | 36.58 cm x 36.58 cm |



Recommended Installation Method

Direct Glue, Double Glue, Stretch-In

Data + Testing

|                            |                                                                                                              |
|----------------------------|--------------------------------------------------------------------------------------------------------------|
| Pill Test                  | Pass                                                                                                         |
| Radiant Panel (Astm E648)  | Class I                                                                                                      |
| Nbs Smoke                  | Less Than 450                                                                                                |
| Electrostatic Propensity   | Less Than 3.5 kv                                                                                             |
| Cri Green Label Plus (Glp) | GLP8472                                                                                                      |
| Ada Compliance             | >0.6, Meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes*** |

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

10 Year Commercial Limited

Coordinating Products

Carpet Tile: **Reverse Tile, Shape Tile, Direction Tile, Realm Tile, Field Tile, Scape Tile**

Broadloom: **Modify, Switch**

Attributes + Certifications

Health & Wellbeing

Material Ingredient Transparency

Indoor Air Quality

Cradle to Cradle Certified® | Silver Level (Version 3.1)  
NSF 140 | Gold

CRI Green Label Plus (GLP) | GLP8472

Climate Impact

Environmental Product Declaration (EPD)

Total Recycled Content

Product Packaging

3rd Party Certified in Accordance with ISO14044, ISO14025 & EN15804

<1% (Pre-Consumer <1% | Post-Consumer 0%)

100% Recyclable

Global Product Assessment

CE Marking (EN 14041) | 3rd Party Certified

Environmental Guarantee\* | Re[turn] Reclamation Program\* | Pickup & Delivery Available

Country of Origin\*\* | USA

Green Leed Contribution Credit

MR Credit: Building Product Disclosure and Optimization  
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

3rd Party Certified in Accordance with ISO14044, ISO14025 & EN15804

MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 1: Material Ingredient Reporting

C2C Silver Level (Version 3.1)


MR Credit: Building Product Disclosure and Optimization  
Material Ingredients - Option 2: Material Ingredient Optimization

C2C Silver Level (Version 3.1)

EQ Credit: Low Emitting Materials  
Option 1: Product Category Calculations

Green Label Plus Certification: GLP8472

Available Colorways

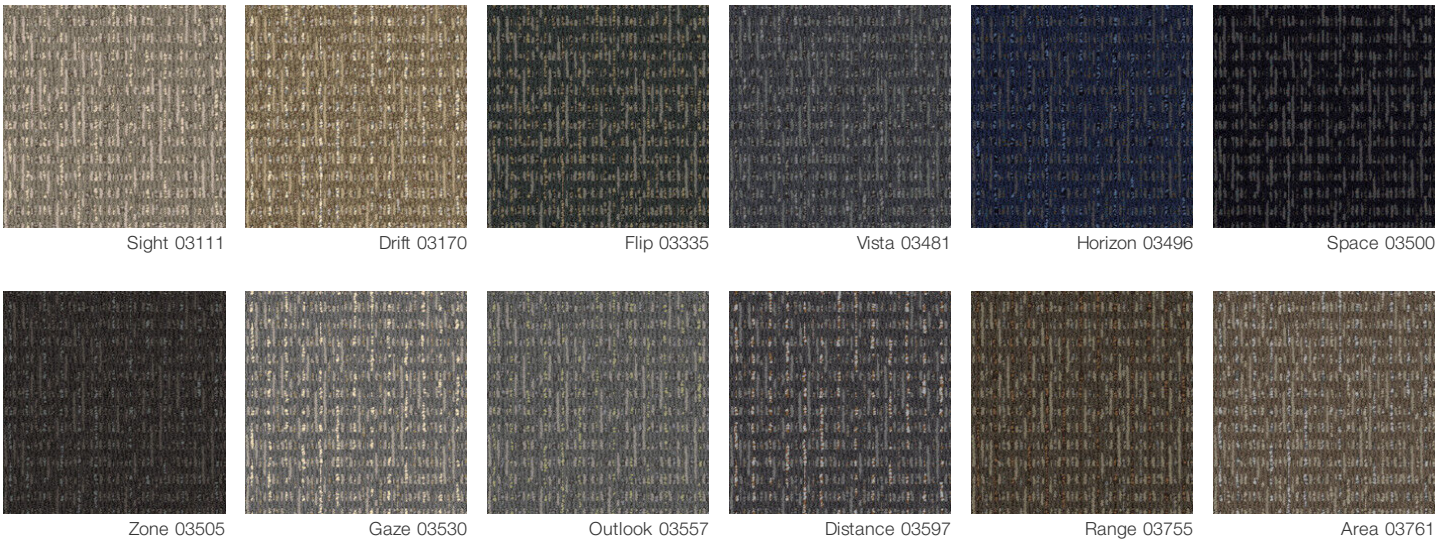

Additional Information

\* To learn more about the recyclability of our products and our Environmental Guarantee, please visit [shawcontract.com/sustainability](https://shawcontract.com/sustainability).

\*\*Meets or exceeds all local and national regulations in country of manufacture. (Manufactured in an ISO 9001 & ISO 14001 certified facility or equivalent)

\*\*\*This carpet is manufactured to be ADA compliant, but to be fully ADA compliant, the end-user must ensure the carpet is adhered to the floor and installed as outlined in the ADA standards.

[Installation Guidelines](#)  
Maintenance Guidelines

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit [shawcontract.com/testing](https://shawcontract.com/testing) for more information.

